

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 646 234 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

07.07.1999 Bulletin 1999/27

(21) Application number: **93910681.1**

(22) Date of filing: **21.04.1993**

(51) Int Cl.⁶: **G01K 15/00, G01F 1/84**

(86) International application number:
PCT/US93/03729

(87) International publication number:
WO 93/21505 (28.10.1993 Gazette 1993/26)

(54) **SELF-VALIDATING SENSORS**

AUF GÜLTIGKEIT PRÜFENDE SENSOREN

DETECTEURS A VALIDATION AUTONOME

(84) Designated Contracting States:
DE FR GB

(30) Priority: **22.04.1992 GB 9208704**

(43) Date of publication of application:
05.04.1995 Bulletin 1995/14

(73) Proprietor: **THE FOXBORO COMPANY**
Foxboro, MA 02035 (US)

(72) Inventors:

- **HENRY, Manus, P.**
Oxford OX2 6HN (GB)
- **MATTAR, Wade**
Wrentham, MA 02093 (US)
- **CLARKE, David W.**
Headington, Oxford OX3 8SX (GB)

- **YANG, Janice**
Stebenh, Hertfordshire SG1 4SB (GB)

(74) Representative: **Goodman, Christopher et al**
Eric Potter Clarkson,
Park View House,
58 The Ropewalk
Nottingham NG1 5DD (GB)

(56) References cited:
EP-A- 0 122 622 **EP-A- 0 413 814**
DE-C- 3 540 204 **FR-A- 2 334 827**
US-A- 4 934 196

- **COLLOQUIM DIGEST-IEE 11 February 1991,**
BOSTON pages 1 - 2 M.P. HENRY 'A
FAULT-TOLERANT INTERFACE FOR
SELF-VALIDATING SENSORS'

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 646 234 B1

DescriptionBackground of the Invention

5 **[0001]** This invention relates to sensors and to control systems incorporating sensors.

[0002] A sensor generates measurement data. Typically, the measurement data is a signal that estimates the value of a process variable. In practice, the signal does not perfectly represent the value of the process variable. Instead, the signal also includes effects resulting from the sensor (such as sensor faults or distortion) and other process influences (including those attributable to "faulty" process behavior).

10 **[0003]** Sensor and control system designers employ numerous techniques to increase the reliability of measurement data. For example, sensor designers try to develop improved sensor designs that minimize both the occurrence of sensor faults and the distortions occurring during normal operation. In another approach, control system designers implement rigorous programs of sensor checking, maintenance, and calibration to reduce both the frequency at which sensor faults occur and the distortion caused by poorly maintained sensors.

15 **[0004]** In conjunction with increasing the reliability of measurement data, designers employ fault detection techniques to increase a control system's ability to recognize that measurement data is unreliable. For example, control system designers often rely on sensor redundancy to reduce the effect of any sensor fault that may occur. If measurement data from a sensor in a group of redundant sensors is inconsistent with measurement data from other sensors in the group, a control system can designate the inconsistent data as unreliable and ignore that data.

20 **[0005]** In another approach to fault detection, control systems monitor information about the process and the sensor for signs of sensor faults. Until recently, sensors have been limited to a single analog communication channel, normally based on the 4-20mA convention, and, therefore, have been unable to transmit signals other than a measurement data signal. Faced with this limitation, users of process fault detection techniques have tried to extract sensor and process fault information from measurement data. However, in attempting to minimize distortion of the measurement data, sensor designers have tried to eliminate, by sophisticated filtering and other means, every component of the measurement data signal that does not actually relate to the variable being measured. Thus, improved sensor designs have limited the information available for extraction from the measurement signal for fault detection purposes.

25 **[0006]** Recent use of digital communications technology by control system designers has enabled sensors to transmit multiple signals. This, in combination with internal diagnostics generated by microprocessors, which are now commonly embedded within sensors, has resulted in sensors that are able to perform fault detection analyses internally and transmit the results of these analyses as a fault information signal. Typically, the fault information signal is either a device specific error code or a single bit which indicates that the sensor is either functional or nonfunctional.

30 **[0007]** FR-2334827 describes a method of determining the validity of measurements received from a plurality of temperature sensors in a gas turbine system. Each temperature sensor output is preliminarily screened for validity and if non-valid may be substituted with a default value. Valid measurements are used from all of the sensors compute an average, a maximum and a minimum value of the group of sensors. There is no teaching of a method or apparatus for performing a dynamic uncertainty analysis on an output signal from the sensor.

35 **[0008]** Colloquium Digest IEEE, Feb. 1991, pp. 1-2; M P Henry: "A Fault Tolerant Interface for Self-Validating Sensors" discloses the concept of a sensor which generates a validity index to convey the consequences in terms of data quality of any fault on a measurement value. EP-0413814 describes a clinical thermometer which includes means for providing a prediction of equilibrium temperature, or an indication that a reliable prediction cannot be made. EP-0122622 describes a clinical thermometer which includes means for providing a prediction of equilibrium temperature, and an indication of an error range in the predicted equilibrium temperature. US-4934196 describes a Coriolis mass flow rate meter having increased noise immunity.

SUMMARY OF THE INVENTION

45 **[0009]** The invention provides a sensor and method for providing a measurement and information about the validity of the measurement according to claims 1 and 10 respectively. As described herein, a self-validating sensor provides, based on all information available to the sensor, a best estimate of the value of a parameter being monitored. Because the best estimate is based, in part, on nonmeasurement data, the best estimate does not always conform to the value indicated by the current, possibly faulty, measurement data. A self-validating sensor also provides information about the uncertainty and reliability of the best estimate, as well as information about the operational status of the sensor. Uncertainty information is derived from known uncertainty analyses and is provided even in the absence of faults.

50 **[0010]** In one aspect, generally, the invention features a sensor that includes a transducer that generates a data signal related to the value of a variable and a transmitter that receives the data signal and generates output signals in response. The transmitter generates a first output signal related to the value of the variable and a second output signal based on a dynamic uncertainty analysis of the first output signal. When the sensor experiences a fault, the transmitter

modifies the first and second output signals to account for the impact of the fault. In some embodiments, the transmitter generates a third output signal that indicates a state of reliability of the first output signal.

[0011] The second output signal, which provides on line uncertainty, can be used for data quality management. A specified maximum permitted uncertainty can be used, for example, in specifying plant instrumentation, supervising feedback control, scheduling maintenance, and demonstrating adequate data quality for environmental compliance or custody transfer applications.

[0012] Generally, the invention provides a standard, device-independent method of communicating sensor faults and measurement quality, which eases integration into control schemes. In some cases, this avoids the cost of sensor redundancy and constant calibration programs, which, in any large or complicated process plant, are quite costly and of dubious value.

[0013] The invention also eases implementation of fault detection schemes by supplying a common set of variables in a generic form for use by control systems and requiring sensor designers, who are in the best position to recognize and define faulty behavior, to implement the actual fault detection in the sensors themselves.

Brief Description of the Drawing

[0014] Fig. 1 is a block diagram of a process control system with multiple sensors and actuators.

[0015] Fig. 2 is a block diagram of a sensor according to the invention.

[0016] Fig. 3 is a block diagram showing the flow of information in the sensor of Fig. 2.

[0017] Fig. 4 is a composite graph showing three methods of responding to a fault in the sensor of Fig. 2.

[0018] Fig. 5 is a composite graph of various signals produced by the sensor of Fig. 2.

[0019] Fig. 6 is a block diagram showing the timing of information flow in the sensor of Fig. 2.

[0020] Fig. 7 is a block and schematic diagram of a temperature sensor according to the invention.

[0021] Fig. 8 is a set of composite graphs of an auxiliary signal (upper graph), raw temperature (middle graph), and validated temperature and uncertainty (lower graph) versus time for the instrument of Fig. 7.

[0022] Fig. 9 is a set of composite graphs of raw data (upper graph), raw temperature (middle graph) and validated temperature and uncertainty (lower graph) versus time for the instrument of Fig. 7.

[0023] Fig. 10 is a paired composite graph of auxiliary data (upper graph) and validated temperature and uncertainty (lower graph) for the instrument of Fig. 7.

[0024] Fig. 11 is a schematic and block diagram of a Coriolis flow meter.

[0025] Fig. 12 is pseudocode showing steps performed by the meter of Fig. 11 during each sampling period.

[0026] Fig. 13 is pseudocode showing steps performed by the meter of Fig. 11 in determining temperature and associated uncertainty.

[0027] Fig. 14 is pseudocode showing steps performed by the meter of Fig. 11 in diagnosing a fault.

[0028] Fig. 15 is a set of composite graphs showing the effect of a loss of temperature on temperature (upper graphs), density (middle graphs) and mass flow rate (lower graphs) versus time for the meter of Fig. 11.

Description of the Preferred Embodiments

[0029] Referring to Fig. 1, in a process control system 10, a plurality of sensors 12 monitor parameters of a process 14 and provide signals about the monitored parameters to a data control and management system 16 on a digital communications link 18. Digital communications link 18 allows bidirectional communication between multiple central processing units 16, sensors 12, and process actuators 20. In response to signals from sensors 12, data control and management system 16 sends process control signals to process actuators 20 on digital communications link 18. Thereafter, process actuators 20 respond to process control signals from data control and management system 16 by modifying parameters of process 14.

[0030] Because data control and management system 16 relies on measurement signals from sensors 12 in controlling process 14, measurement signals from sensors 12 need to be accurate and reliable. A given sensor 12 typically cannot guarantee complete accuracy and reliability; instead, sensor 12 provides data control and management system 16 with indications of the uncertainty (which, in turn, indicates the accuracy) and the reliability of the measurement signals.

[0031] Referring also to Fig. 2, sensor 12 includes one or more transducers 22 that monitor the values of parameters of process 14 and provide signals to a transmitter 24. Transmitter 24 samples the signals from transducers 22 and produces measurement values for the parameters being monitored by transducers 22. Transmitter 24 validates the measurement values and provides the validated measurement values, along with an indication of the uncertainty of the validated measurement values, to data control and management system 16 via digital communications link 18. In addition, transmitter 24 generates signals indicating the reliability of the validated measurement values provided by sensor 12 and the operational status of sensor 12, and provides these signals to data control and management system

16 via digital communications link 18.

[0032] Transmitter 24 generates the signals provided to data control and management system 16 during a sample period and transmits the signals at the end of the sample period. Typically, the duration of a sample period is less than one second, but this duration can be adjusted as required by a particular application.

[0033] As shown in Fig. 3, transmitter 24 typically provides four signals to data control and management system 16:

(1) VMV 26 - a validated measurement value of a process parameter (transmitter 24's best estimate of the value of the measured parameter),

(2) VU 28 - a validated uncertainty associated with VMV 26,

(3) MV status 30 - the status of VMV 26 (the manner in which VMV 26 was calculated), and

(4) device status 32 - the operational status of the sensor.

[0034] If sensor 12 measures multiple process parameters, transmitter 24 produces a version of VMV 26, VU 28, and MV status 30 for each process parameter.

[0035] In some circumstances, transmitter 24 can provide additional information. For example, upon a request by data control and management system 16, transmitter 24 provides detailed diagnostic information 34 about the status of sensor 12. Also, when a measurement has exceeded, or is about to exceed, a predetermined limit, transmitter 24 can send alarm data 35. Typically, different alarm levels can be used to indicate the severity with which the measurement has deviated from the predetermined value.

[0036] VMV 26 and VU 28 are numeric values. For example, VMV 26 could be a temperature measurement valued at 200 degrees and VU 28, the uncertainty of VMV 26, could be 9 degrees. In this case, there is a high probability (typically 95%) that the actual temperature being measured falls within an envelope around VMV 26 and designated by VU 28 (191 degrees to 209 degrees).

[0037] Transmitter 24 generates VMV 26 based on a signal produced by transducer 22. First, transmitter 24 derives RMV 36, an unvalidated image of the measured process parameter that is based on the signal generated by transducer 22. Typically, when transmitter 24 detects no abnormalities in sensor 12, transmitter 24 has nominal confidence in RMV 36 and sets VMV 26 equal to RMV 36.

[0038] As discussed in more detail below, when transmitter 24 detects an abnormality in sensor 12, transmitter 24 does not set VMV 26 equal to RMV 36. Instead, transmitter 24 sets VMV 26 to a value that transmitter 24 considers to be a better estimate of the actual parameter than RMV 36. If transmitter 24 detects a fault in sensor 12 that only partially affects the reliability of RMV 36 such that transmitter 24 has reduced confidence in RMV 36, transmitter 24 typically rederives RMV 36 by modifying the parameters used in deriving RMV 36 to account for the fault, and sets VMV 26 equal to the new value of RMV 36. Alternatively, if transmitter 24 detects a fault in sensor 12 which indicates that RMV 36 bears no relation to the actual measured value such that transmitter 24 has zero confidence in RMV 36, transmitter 24 sets VMV 26 to a value based on past performance.

[0039] Referring also to Fig. 4, three examples of past performance values include short term past values, long term past values, and a combination of long and short term past values. As shown in (a), when short term past values are used, VMV 26 can equal the value of VMV 26 had immediately prior to the fault that occurs at time 5. As shown in (b), when long term past value are used, VMV 26 can equal the average value of VMV 26. As shown in (c), when a combination of long and short term past values is used, the long and short term past values can be combined using the following equation, which weighs each value according to its uncertainty:

$$VMV_{L\&S} = \frac{VU_L^2}{VU_L^2 + VU_S^2} * VMV_S + \frac{VU_S^2}{VU_L^2 + VU_S^2} * VMV_L$$

where VU_L and VU_S are the long and short term past values for VU 28 and VMV_L and VMV_S are the long and short term past values for VMV 26.

[0040] Transmitter 24 generates VU 28 based on a raw uncertainty signal, RU 62, that is the result of a dynamic uncertainty analysis of RMV 36. Transmitter 24 performs this uncertainty analysis during each sampling period. Uncertainty analysis, originally described in "Describing Uncertainties in Single Sample Experiments," S.J. Kline & F.A. McClintock, Mech. Eng., 75, 3-8 (1953), has been widely applied and has achieved the status of an international standard for calibration. Essentially, an uncertainty analysis provides an indication of the "quality" of a measurement. Every measurement has an associated error, which, of course, is unknown. However, a reasonable limit on that error

can often be expressed by a single uncertainty number (ANSI/ASME PTC 19.1-1985 Part 1, Measurement Uncertainty: Instruments and Apparatus).

[0041] As described by Kline & McClintock, for any observed measurement M , the uncertainty in M , w_M , can be defined as follows:

$$M_{true} \in [M - w_M, M + w_M]$$

where M is true (M_{true}) with a certain level of confidence (typically 95%). This uncertainty is readily expressed in a relative form as a proportion of the measurement (i.e. w_M/M).

[0042] A propagation rule exists for obtaining the uncertainties of arbitrary functions of primary measurements. For example, for an arbitrary function R of variables X , Y , and Z ,

$$R = R(X, Y, Z)$$

the uncertainty of R is given by

$$[w_R/R]^2 = [\partial R/\partial X]^2 [w_X/R]^2 + [\partial R/\partial Y]^2 [w_Y/R]^2 + [\partial R/\partial Z]^2 [w_Z/R]^2$$

This sum of squares form is derived from the Taylor series, and assumes the independence of X , Y , and Z , that their relative uncertainties are "small", and that all uncertainties are expressed at the same probability level. For purposes of this application, all uncertainties are assumed to be at 95% probability.

[0043] One of the uses of the uncertainty propagation formula is to reveal particular circumstances that can result in a higher or lower than expected level of uncertainty. For example, as discussed in S.J. Kline, "The Purposes of Uncertainty Analysis", ASME Journal of Fluids Engineering, Vol. 107, No. 2, pp. 153-160, 1985, if R is calculated from x and y using the equation

$$R = x - y,$$

the uncertainty in R , w_R , is given by

$$w_R/R = [(x/(x-y) * w_x/x)^2 + (y/(x-y) * w_y/y)^2]^{1/2}.$$

If $x = 1.0$, $y = 0.98$, and the uncertainty in both x and y is 1%, then the uncertainty in R is:

$$w_R/R = [(1/0.02 * 0.01)^2 + (0.98/0.02 * 0.01)^2]^{1/2} = 0.700 = 70\%.$$

By comparison, if R is calculated from a variable z using the equation

$$R = (1/(1 + z))^{1/2},$$

the uncertainty in R is given by

$$w_R/R = w_z/2(1 + z).$$

If $z = 0.1$ and the uncertainty in z is 20%, then the uncertainty in R is only 0.91%.

[0044] On reflection these results should not be surprising. In the first example, two quantities of similar magnitude

are being subtracted, which will increase the relative error in the result. In the second, although z has a large uncertainty, its influence on R is relatively small. Of course, for different values of x , y , and z , the impact of their uncertainties will vary. Uncertainty analysis is useful in that it can quantify these effects.

[0045] Returning to Fig. 3, VU 28 has a non-zero value even under ideal conditions (i.e., a faultless sensor operating in a controlled, laboratory environment). This is because the measurement produced by a sensor is never completely certain and there is always some potential for error.

[0046] As with VMV 26, when transmitter 24 detects no abnormalities in sensor 12, transmitter 24 sets VU 28 equal to RU 62. When transmitter 24 detects a fault in sensor 12 that only partially affects the reliability of RMV 36, transmitter 24 typically performs a new uncertainty analysis that accounts for effects of the fault and sets VU 28 equal to the results of this analysis. As with VMV 26, transmitter 24 sets VU 28 to a value based on past performance when transmitter 24 determines that RMV 36 bears no relation to the actual measured value.

[0047] Fig. 4 illustrates three exemplary techniques for adjusting VU 28 based on past performance values. First, as shown in (a), VU 28 can be increased during each sampling period by the maximum observed rate of change of VMV 26. This technique, which tends to give good short term results, eventually produces unrealistic values for VU 28. Next, as shown in (b), when VMV 26 is set equal to the long term average of VMV 26, VU 28 can indicate that VMV 26 can take any previous value of VMV 26. Thus, if VMV 26 always falls between 0 and 100 and VMV 26 is set to 50, VU 28 is set to 50. This technique tends to give unduly pessimistic short term results, but avoids the long term problems of method (a). Finally, as shown in (c), when VMV 26 is based on a combination of the long and short term past values for VMV 26, VU 28 can be calculated as follows:

$$VU_{L\&S} = \frac{VU_L * VU_S}{(VU_L^2 + VU_S^2)^{1/2}}$$

where VU_L and VU_S are the long and short term past values for VU 28.

[0048] To ensure that data control and management system 16 uses VMV 26 and VU 28 properly, MV status 30 provides information about how VMV 26 and VU 28 were calculated. Transmitter 24 produces VMV 26 and VU 28 under all conditions--even when transducers 22 are inoperative. Often, data control and management system 16 needs to know whether VMV 26 and VU 28 are based on "live" or historical data. For example, if data control and management system 16 were using VMV 26 and VU 28 in feedback control and transducers 22 were inoperative, data control and management system 16 would need to know that VMV 26 and VU 28 were based on past performance.

[0049] MV status 30 is based on the expected persistence of any abnormal condition and on the confidence of transmitter 24 in RMV 36. The four primary states for MV status are generated according to Table 1.

Table 1

Expected Persistence	Confidence in RMV	MV Status
not applicable	nominal	CLEAR
not applicable	reduced	BLURRED
short	zero	DAZZLED
long	zero	BLIND

[0050] A CLEAR MV status 30 occurs when RMV 36 is within a normal range for given process conditions. A DAZZLED MV status 30 indicates that RMV 36 is quite abnormal, but the abnormality is expected to be of short duration. Typically, transmitter 24 sets MV status 30 to DAZZLED when there is a sudden change in the signal from transducer 22 and transmitter 24 is unable to clearly establish whether this change is due to an as yet undiagnosed sensor fault or to an abrupt change in the variable being measured. A BLURRED MV status 30 indicates that RMV 36 is abnormal but reasonably related to the parameter being measured. For example, transmitter 24 may set MV status 30 to BLURRED when RMV 36 is a noisy signal. A BLIND MV status 30 indicates that RMV 36 is completely unreliable and the fault is expected to persist.

[0051] Two additional states for MV status 30 are UNVALIDATED and SECURE. MV status 30 is UNVALIDATED when transmitter 24 is not performing validation of VMV 26. MV status 30 is SECURE when VMV 26 is generated from redundant measurements in which transmitter 24 has nominal confidence.

[0052] Device status 32 is a generic, discrete value summarizing the health of sensor 12 that is used primarily by fault detection and maintenance systems. Typically, device status 32 is in one of six states, each of which indicates a different operational status for sensor 12. These states are: GOOD, TESTING, SUSPECT, IMPAIRED, BAD, or CRIT-

ICAL. A GOOD device status 32 means that sensor 12 is in nominal condition. A TESTING device status 32 means that sensor 12 is performing a self check, and that this self check may be responsible for any temporary reduction in measurement quality. A SUSPECT device status 32 means that sensor 12 has produced an abnormal response, but transmitter 24 has no detailed fault diagnosis. An IMPAIRED device status 32 means that sensor 12 is suffering from a diagnosed fault that has a minor impact on performance. A BAD device status 32 means that sensor 12 has seriously malfunctioned and maintenance is required. Finally, a CRITICAL device status 32 means that sensor 12 has malfunctioned to the extent that sensor 12 may cause (or have caused) a hazard such as a leak, fire, or explosion.

[0053] Fig. 5 illustrates an example of the relationship between VMV 26, VU 28, MV status 30, and RMV 36. In another aspect, Fig. 5 illustrates a preferred method of displaying the relationship between VMV 26 and VU 28 both during normal operation and when a fault has occurred: VU 28 is shown both as a separate signal and as an envelope surrounding VMV 26 (line 38 indicates the sum of VMV 26 and VU 28 and line 40 indicates the difference between VMV 26 and VU 28). When VU 28 is expressed as an envelope surrounding VMV 26, a user can, by examining the envelope, visually determine the range of probable values of the parameter represented by VMV 26 for any displayed time.

[0054] In the region between time T1 and time T2, RMV 36 is a periodic signal whose amplitude falls within an expected range. In this region, VMV 26 equals RMV 36, MV status 30 is CLEAR, and VU 28 remains at a constant "normal" level that corresponds to RU 62, the uncertainty under normal operating conditions (with line 42 representing a zero value for VU 28). For purposes of this example, RU 62 is assumed to have a constant value.

[0055] At time T2, RMV 36 begins to increase at a rate that substantially exceeds an expected rate of change for RMV 36. Transmitter 24 takes a number of actions in response to this unexplained phenomenon. First, transmitter 24 changes MV status 30 to DAZZLED. Next, transmitter 24, which is basing VMV 26 and VU 28 on short term past performance values in this example, maintains VMV 26 at the value that VMV 26 had just before the sudden increase in RMV 36 at time T2. Finally, transmitter 24 begins to increase VU 28 at a constant rate that equals the maximum rate of increase of VMV 26 during normal operation. The progressive increase in the value of VU 28 over time reflects increasing uncertainty of the value of the measurement in the absence of up to date valid transducer data caused by sensor 12 being DAZZLED.

[0056] RMV 36 continues to increase until time T3. At time T3, RMV 36 stops increasing and remains at a constant level. Because the value of RMV 36 now exceeds expected values, transmitter 24 does not change VMV 26 or MV status 30, and continues to increase VU 28 at a constant rate. At time T4, RMV 36 begins to decrease. Because the value of RMV 36 still exceeds expected values, transmitter 24 makes no changes to VMV 26 or MV status 30, and continues to increase VU 28 at a constant rate.

[0057] At time T5, RMV 36 begins to operate as expected. In response, transmitter 24 changes MV status 30 to BLURRED and begins to merge VMV 26 with RMV 36 using, for example, the following equation:

$$VMV_{n+1} = 0.95 * VMV_n + 0.05 * RMV_{n+1}$$

where VMV_{n+1} is the value of VMV 26 for the current sample, VMV_n is the value of VMV 26 generated in the previous sample, and RMV_{n+1} is the value of RMV 36 for the current sample. Next, transmitter 24 initializes a recovery timeout period. Finally, transmitter 24 begins to decrease VU 28 by merging VU 28 with RU 62 using, for example, the following equation:

$$VU_{n+1}^2 = 0.95^2 * VU_n^2 + 0.05^2 * RU_{n+1}^2$$

where VU_{n+1} is the value of VU 28 for the current sample, VU_n is the value of VU 28 generated in the previous sample, and RU_{n+1} is the value of RU 62 for the current sample.

[0058] At time T6, transmitter 24 determines that the recovery timeout period has expired and changes MV status 30 to CLEAR. Because transmitter 24 now has nominal confidence in RMV 36, transmitter 24 sets VU 28 equal to RU 62.

[0059] If, at time T5, RMV 36 had not returned to expected levels, sensor 12 would have either maintained MV status 30 as DAZZLED or diagnosed a sensor fault and changed MV status 30 to BLIND. MV status 30 can only be DAZZLED for a limited "timeout" period. Thus, if RMV 36 remained at unexpected levels, the timeout period would eventually expire, and transmitter 24 would change MV status 30 to BLIND.

[0060] As shown in Fig. 3, transmitter 24 uses several sources of information, each of which is discussed below, in generating VMV 26, VU 28, MV status 30, device status 32, diagnostic information 34, and alarm data 35. Raw data 44, the basic measurement information available to transmitter 24, is typically an electrical image of the output of one or more transducers 22 (e.g., the frequency of oscillation or the resistance of a transducer 22). Raw data 44 contains the maximum information available about the response of transducer 22 and is therefore a rich source of information

for statistical tests to detect sensor faults. However, knowledge of expected process behavior cannot be applied readily to raw data 44 and is more appropriately applied to statistics based on RMV 36.

[0061] Because RMV 36 directly relates to a process parameter (e.g., temperature or mass flow rate), transmitter 24 can link the expected (no-fault) behavior of RMV 36 to the expected behavior of the process parameter associated with RMV 36. Transmitter 24 derives RMV 36 from raw data 44 by conventional processing. For example, if raw data 44 corresponds to the resistance of a transducer 22 and RMV 36 corresponds to temperature, transmitter 24 derives RMV 36 based on raw data 44 in light of known effects of temperature on the resistance of transducer 22. Often, transmitter 24 filters RMV 36 to reduce the effect of sensor noise and high frequency process disturbances. When filtering occurs, RMV 36 contains less information than raw data 44.

[0062] To a certain extent, raw data 44 and RMV 36 are complementary sources of information. While raw data 44 has more information content than RMV 36, RMV 36 is more easily compared with expected process behavior. Thus, raw data 44 and RMV 36 each offer useful information to transmitter 24.

[0063] Auxiliary data 46 is provided by auxiliary signals within sensor 12. Auxiliary signals, though not directly related to raw data 44 or RMV 36, give useful information about the health or performance of sensor 12. For example, statistical tests to identify characteristic sensor or process behavior may be associated with particular auxiliary signals. Examples of auxiliary signals include the electrical properties of components within sensor 12 (e.g., signal levels at the input or output stages of power amplifiers) and hardware error information 50. Hardware error information 50 is a special, preprocessed form of auxiliary information generated by digital components within sensor 12, requiring little or no processing or interpretation. For example, a memory checksum error in a memory component of transmitter 24 would constitute hardware error information 50.

[0064] In addition to information from within sensor 12 or from process 14, transmitter 24 uses information from data control and management system 16 in generating output signals. Data control and management system 16 is known as the "Next Level Up" ("NLU"), and information from data control and management system 16 is known as NLU information 48. A difficulty associated with having transmitter 24 validate the output of sensor 12 is that transmitter 24 may have insufficient information to reach a valid conclusion. For example, transmitter 24 may be unable to distinguish between certain types of sensor faults (e.g., drift errors that cause the output of the sensor to change over time for a given input) and legitimate process changes. In these situations, transmitter 24 may refer to NLU information 48 for clarification. Data control and management system 16, which has access to additional information, including data from other sensors 12, provides transmitter 24 with the information needed to distinguish between process changes and sensor drift.

[0065] Transmitter 24 may request NLU information 48 such as anticipated process limits through standard requests to data control and management system 16. Alternatively, data control and management system 16 can provide unsolicited information, such as indications of changes in process behavior that will change the process parameters being measured by transducers 22, to transmitter 24. For example, if process 14 operates in a number of phases that each have distinct characteristics, data control and management system 16 can notify transmitter 24 when the phase of process 14 changes.

[0066] Application knowledge base information 52 allows transmitter 24 to estimate a "wear and tear" effect on sensor performance. Application knowledge base information 52 describes the relationship between signals and sensor characteristics over time. In some applications, sensors are known to degrade much more rapidly under certain conditions (e.g., at extremes of their operating range). For example, if a normal range pH probe is exposed to more than about 12pH for as little as an hour, the probe may become alkali-conditioned and fail to respond when the solution becomes more acidic. Application knowledge base information 52 also includes factors such as the time elapsed since the last calibration or last maintenance of sensor 12.

[0067] Sensor/process stimulus information 54 provides information about a known stimulus applied to the process or part of a sensor. Sensor/process stimulus information 54 is used in implementing procedures for testing sensor 12. A known stimulus is applied to process 14 or sensor 12 and the response generated by sensor 12 is compared with an expected response. For example, sensor/process stimulus information 54 could describe a known force that has been introduced to a pressure transducer. Sensor/process stimulus information 54 is generated by transmitter 24 (i.e., as part of a self-test initiated by transmitter 24) or sent by data control and management system 16 as NLU information 48. When testing disables the measuring capability of sensor 12, transmitter 24 sets the MV status 30 of each disabled measurement to DAZZLED, bases VMV 26 and VU 28 on past performance, and sets device status 32 to TESTING.

[0068] Fig. 3 also shows the functional units of transmitter 24. A diagnostic state machine 56 processes all of the information available to transmitter 24 and determines the diagnostic state 58 of sensor 12. Diagnostic state 58 is the central piece of information used by diagnostic state machine 56 in deriving VMV 26, VU 28, MV status 30, and device status 32. Because diagnostic state 58 may itself be helpful to users performing maintenance on sensor 12, it is the basis of diagnostic information 34, which is output upon a request by data control and management system 16.

[0069] Referring also to Fig. 6, transmitter 24 performs the following operations during each sampling period. After

getting raw data 44 from transducer 22 (step 72), diagnostic state machine 56 propagates raw data 44 through a set of device equations 60 to generate RMV 36 (step 74). At the same time, transmitter 24 dynamically calculates RU 62 using an uncertainty analysis 64 based on device equations 60 and calibration data 66 in accordance with the established standards discussed above (step 74). In calculating RU 62, transmitter 24 assumes that no fault has occurred. RU 62 has a non-zero value under all operating conditions. Generally, RU 62 increases under other than ideal conditions.

[0070] Next, diagnostic state machine 56 obtains other information (step 76) and, based on the other information, raw data 44, RMV 36, and RU 62, calculates statistics or performs pattern matching to determine if sensor 12 is operating correctly (step 78). Based on the results of step 78, diagnostic state machine 56 updates diagnostic state 58 (step 80).

[0071] Next, diagnostic state machine 56 modifies (68) RMV 36 based on diagnostic state 58 to produce VMV 26. Essentially, diagnostic state machine 56 recalculates RMV 36 after modifying the parameters used in the calculation to account for diagnostic state 58 and sets VMV 26 equal to the new RMV 36 (step 82). Thus, under normal operating conditions (when diagnostic state 58 does not require modification of any parameters), VMV 26 typically equals RMV 36.

[0072] At the same time, diagnostic state machine 56 modifies (70) RU 62 based on diagnostic state 58 to produce VU 28. As with VMV 26, diagnostic state machine 56 recalculates RU 62 after modifying the parameters used in the calculation to account for diagnostic state 58 and sets VU 28 equal to the new RU 62 (step 82). Thus, VU 28 typically equals RU 62 under normal operating conditions. Under other conditions, VU 28 typically exceeds RU 62.

[0073] Next, diagnostic state machine 56 selects MV status 30 (step 84) and device status 32 (step 86) based on diagnostic state 58 and via either calculations or a lookup table. If necessary, diagnostic state machine 56 sends alarm data 35 by updating alarm flags (step 88). Also, if data control and management system 16 has requested it, diagnostic state machine 56 generates diagnostic information 34 based on diagnostic state 58 (step 90).

[0074] Referring to Fig. 7, a self-validating temperature sensor 100 includes a thermocouple 102 and a transmitter 104 that includes a processor 106. Typically, thermocouple 102 includes two dissimilar metals in contact and produces a voltage, V_{Diff} , between two terminals 108 and 110. V_{Diff} is proportional to the difference between the temperature of a sensing junction 112 and a reference junction 114. The sum of V_{Diff} and V_{Comp} , a voltage proportional to the difference between the temperature of reference junction 114 and zero degrees, equals V_{Temp} , a voltage proportional to the difference between the temperature of sensing junction 112 and zero degrees. To determine V_{Temp} , V_{Diff} is amplified by amplifier 116 and V_{Comp} is generated by temperature sensor 118 and amplified by amplifier 120. The output 117 of amplifier 116 and the output 121 of amplifier 120 are then supplied to an analog-to-digital convertor ("ADC") 122 in processor 106. Processor 106 uses amplifier outputs 117, 121, and other available information, to generate diagnostic state 58, RMV 36, and RU 62. Based on these signals, processor 106 generates VMV 26, VU 28, MV status 30, device status 32, alarm data 35, and, when requested, diagnostic information 34.

[0075] Referring to Fig. 8, self-validating temperature sensor 100 responds to a loss of power to amplifiers 116, 120 as described below. During normal operation (time 0 to 15), VMV 26 equals RMV 36, which processor 106 generates based on the sum of outputs 117, 121. Similarly, VU 28 equals RU 62, and indicates the uncertainty of VMV 26. MV status 30 is CLEAR.

[0076] At time 15, the power supply 132 stops functioning and V_{Diff} and V_{Comp} (outputs 117, 121) both go to zero volts, which results in an RMV 36 of about negative 55°C (for a particular transmitter design). Processor 106 detects the loss of power when power monitor 134, a digital auxiliary signal, switches from one to zero in response to the loss of power. Processor 106 then sets diagnostic state 58 to indicate that processor 106 has zero confidence in RMV 36. As a result, processor 106 sets VMV 26 and VU 28 to a combination of the long and short term past values for VMV 26 and VU 28 respectively as described above. Finally, processor 106 signals the severity and expected long term duration of the sensor fault by setting MV status 30 to BLIND.

[0077] When the power supply is restored at time 36, processor 106 detects the change in power monitor 134 from zero to one and sets MV status 30 to BLURRED. The "live" data from RMV 36 is merged with the previous value of VMV 26 as described above to give a new value for VMV 26. Similarly, RU 62 is merged with the previous value of VU 28 to give a decreasing value for VU 28. At this time, processor 106 also initializes a recovery timer.

[0078] Processor 106 generates VMV 26 and VU 28 by merging past values of VMV 26 and VU 28 with, respectively, RMV 36 and RU 62 until the recovery timer expires at time 56. (In this example, the recovery timer was set for 20 seconds.) At that time, processor 106 sets MV status to CLEAR, sets VMV 26 equal to RMV 36, and sets VU 28 equal to RU 62.

[0079] Referring now to Fig. 9, an open circuit fault occurs at time 13 when thermocouple 102 is disconnected from transmitter 104. In the presence of such a fault, RMV 36 is around 130°C, which corresponds to a normal value for output 121 but an abnormally high value for output 117 due to saturation of amplifier 116. (Pull-up resistor 136 causes saturation of amplifier 116 in the presence of an open circuit fault.) In response to the abnormally high value of output 117, processor 106 sets diagnostic state 58 to indicate zero confidence in RMV 36 and sets MV status 30 to DAZZLED. Processor 106 then generates VMV 26 and VU 28 based on a combination of the long and short term past values as

described above.

[0080] Next, referring again to Fig. 7, processor 106 connects thermocouple 102 to voltage source 124 via switch 126 and monitors the voltage 130 produced across a resistor 128. Because of the open circuit, no current flows in resistor 128 and voltage 130 is zero volts. From this, processor 106 confirms the open circuit fault and sets MV status 30 to BLIND.

[0081] At time 27, the open circuit fault is corrected and output 117 returns to a normal value. Processor 106 responds by setting diagnostic state 58 to indicate reduced confidence in RMV 36 (rather than no confidence), sets MV status 30 to BLURRED, and initializes a recovery timer.

[0082] Thereafter, processor 106 generates VMV 26 and VU 28 by merging past values of VMV 26 and VU 28 with, respectively, RMV 36 and RU 62 until the recovery timer expires at time 47 (where the recovery timer was set for 20 seconds). At that time, processor 106 sets MV status to CLEAR, sets VMV 26 equal to RMV 36, and sets VU 28 equal to RU 62.

[0083] Referring to Fig. 7, a loss of contact fault occurs when sensing junction 112 loses contact with the process element of which the temperature is being measured. Because a loss of contact fault does not produce an abnormal change in RMV 36, sensor 100 cannot readily detect the fault.

[0084] As a result, sensor 100 uses current injection tests to detect loss of contact faults. In a current injection test, sensor 100 connects thermocouple 102 to voltage source 124 for a predetermined period and measures the effect on output 117. (The value of output 117 before thermocouple 102 is connected to voltage source 124 is compared to the value after disconnection.)

[0085] Referring to Fig. 10, a loss of contact fault occurs at time 12 and the measured temperature drops by about seven degrees. Because this is within normal operating parameters, sensor 100 does not immediately recognize the fault, and, instead, adjusts VMV 26 and maintains MV status 30 as CLEAR.

[0086] At time 28, processor 106 begins a current injection test. Because amplifier 116 does not read "live" data during the test, processor 106 sets MV status 30 to DAZZLED and generates VMV 26 and VU 28 based on past performance as discussed above. At time 33, processor 106 determines that the fault has occurred and sets MV status 30 to BLURRED. (Processor 106 assumes that, though contact has been lost, the temperature sensed by thermocouple 102 still approximates the actual temperature.)

[0087] At time 56, contact is reestablished. However, processor 106 interprets the sudden change in output 117 as a spike and temporarily sets MV status 30 to DAZZLED. When output 117 remains at the increased value, processor 106 sets MV status 30 back to BLURRED. (Processor 106 does not set MV status 30 to CLEAR because processor 106 has not detected the removal of the fault condition.)

[0088] At time 66, processor 106 begins another current injection test and sets MV status 30 to DAZZLED. At time 72, processor 106 determines that contact has been reestablished and, in response, sets MV status to BLURRED and initializes a recovery timer. At time 97, the recovery timer (which was set to 25 seconds) expires and processor 106 sets MV status to CLEAR.

[0089] Referring to Fig. 11, another example of a self-validating sensor according to the invention is a Coriolis flow meter 150. Flow meter 150 measures three process parameters: mass flow rate, density, and temperature. Mass flow is measured directly using the principle of Coriolis acceleration, without needing to rely on external pressure, temperature, or specific gravity measurements.

[0090] Structurally, flow meter 150 consists of a flowtube 152 that is connected to a transmitter 154 by cables 156. Flowtube 152 includes a body 158 to which is connected an input pipe 160 and an output pipe 162. Two parallel pipe loops 164, 166 extend from body 158. Body 158 contains passages which lead a process fluid from input pipe 160 to the beginning of loop 164, from the end of loop 164 to the beginning of loop 166 and from the end of loop 166 to output pipe 162 (the broken arrows in Fig. 11 show the direction of flow in loops 164, 166).

[0091] Transmitter 154 causes loops 164, 166 to pivotally oscillate about their axes of symmetry Y'-Z' and Y-Z by supplying anti-phase sinusoidal signals to electromagnetic drivers 168, 170. Transmitter 154 uses feedback to maintain the signals to drivers 168, 170 at the resonant frequency of loops 164, 166. Transmitter 154 then detects movement of loops 164, 166 via sensors 172, 174, which each produce a voltage that is proportional to the instantaneous velocity between loops 164, 166. Transmitter 154 adjusts the amplitude of the signals to drivers 168, 170 to maintain the average amplitude of the voltages produced by sensors 172, 174 at a constant level.

[0092] Transmitter 154 measures mass flow rate, density, and temperature in the following manner. First, transmitter 154 measures the mass flow rate of the process fluid by monitoring the effect of Coriolis forces on loops 164, 166. Coriolis forces acting on sections G'-H' and G-H of oscillating loops 164, 166 cause deflections of loops 164, 166. These deflections result in a phase angle difference between the voltages produced by sensors 172, 174 that is proportional to the mass flow rate. Next, transmitter 154 determines the density of the process fluid from the frequency of oscillation of loops 164, 166 (which equals the frequency of the signals supplied to drivers 168, 170). The density of the process fluid is inversely proportional to the square of the drive frequency. Finally, transmitter 154 measures the temperature of the process fluid via a temperature sensor 176 located in body 158. Typically, temperature sensor 176

is an RTD device with a resistance that is temperature dependent.

[0093] In the context of flow meter 150, the raw data available are the frequency 44c of a signal coming out of temperature sensor 176 (the frequency is proportional to the resistance of temperature sensor 176), frequency 44b of the drive signals applied to drivers 168, 170, and the voltage outputs 44c of sensors 172, 174. From these signals, transmitter 154 derives three RMVs: the temperature of the process fluid 36a, the density of the process fluid 36b, and the mass flow rate 36c (derived from the phase angle between the sensor signals). In addition, transmitter 154 performs uncertainty analyses to produce three RUs (62a, 62b, 62c), each indicating the uncertainty of a corresponding RMV 36.

[0094] After generating RMVs 36a-c and RUs 62a-c, transmitter 154 determines the diagnostic state 58 of flow meter 150. This determination is based on raw data 44a-c, RMVs 36a-c, RUs 62a-c, and auxiliary data 46. Based on diagnostic state 58, transmitter 154 adjusts the parameters used in calculating RMVs 36a-c and RUs 62a-c and recalculates these values. Transmitter 154 then outputs the recalculated RMVs 36a-c and RUs 62a-c as VMVs 26a-c and VUs 28a-c. Transmitter 154 also outputs a MV status 30a corresponding to temperature, a MV status 30b corresponding to density, and a MV status 30c corresponding to mass flow rate. Finally, transmitter 154 outputs a single device status 32 corresponding to the status of flow meter 150.

[0095] Referring again to Fig. 6, the procedure performed by transmitter 154 during each sample period can be implemented in software. An example of software for implementing of a self-validating Coriolis meter 150 is included in microfiche appendix 1. In addition, an example of software for implementing a self-validating temperature sensor 100 as described above is included in microfiche appendix 2. The software in appendices 1 and 2 may be implemented on any processor that supports a structured programming language. In an alternative approach, the procedure could be implemented using hardwired circuitry.

[0096] The pseudocode shown in Fig. 12 provides a simplified view of the procedure performed by transmitter 154 during each sample period. Fig. 12 also shows, in parentheses, the steps performed in Fig. 6 that correspond to the steps in Fig. 12. Initially, transmitter 154 gets raw data 44a-c from flowtube 152 (step 200). Transmitter 154 then calculates RMVs 36a-c and RUs 62a-c (steps 202-206). The pseudocode for calculating RMV 36a and RU 62a is shown in Fig. 13 and is discussed below. Next, transmitter 154 examines all available information (step 208) and determines diagnostic state 58, MV statuses 30a-c, and device status 32 (step 210). A portion of the pseudocode for determining diagnostic state 58 and MV statuses 30a-c is shown in Fig. 14 and discussed below. Based on diagnostic state 58, transmitter 154 corrects the parameters used in calculating RMV 36a-c and RU 62a-c (step 212). Transmitter 154 then calculates VMVs 26a-c and VUs 28a-c (steps 214-218) using the procedure with which RMVs 36a-c and RUs 62a-c were calculated and corrected parameters.

[0097] Referring to Fig. 13, transmitter 154 calculates RMV 36a and RU 62a as follows. First, transmitter 154 calculates the resistance "R" of temperature sensor 176 (step 250). Transmitter 154 then calculates the uncertainty "d_R" of R based on an uncertainty analysis of the equation used to calculate R (step 252). Next, transmitter 154 calculates "temperature" (step 254), and sets RMV 36a equal to temperature. Finally, transmitter 154 calculates the uncertainty "d_temperature" of temperature (step 256), and sets RU 62a equal to d_temperature. Thus, as a first pass RMV 36a and RU 62a equal the measured temperature and its corresponding uncertainty. If transmitter 154 subsequently determines that it has less than nominal confidence in RMV 36a and RU 62a, transmitter 154 modifies any of the parameters, uncertainties, and/or raw data (e.g., RK1, d_RK1, f_RTD) used in calculating temperature and d_temperature to reflect the impact of an expected fault. Transmitter 154 then reperforms the procedure illustrated in Fig. 13 using the modified information and sets VMV 26a and VU 28a equal to the new values for temperature and d_temperature. Alternatively, if transmitter 154 determines that the fault is too severe, transmitter 154 may set VMV 26a and VU 28a based on historical data.

[0098] Fig. 14 illustrates the procedure used by transmitter 154 to detect and respond to a loss of input from temperature sensor 176. Transmitter 154 maintains a variable, RTD_input_state, that indicates the current status of the input from temperature sensor 176. As a first step, transmitter 154 checks RTD_input state (step 300).

[0099] If RTD_input_state equals RTD_INPUT_OK, which indicates that the input from temperature sensor 176 was functioning normally during the previous sample period, transmitter 154 checks the resistance of temperature sensor 176 (step 304). If the resistance is less than 80 ohms, this indicates that the connection between transmitter 154 and temperature sensor 176 has been lost. In response, transmitter 154 sets RTD_input_state to RTD_INPUT_LOST (step 306). Transmitter 154 then checks the value of RTD_spike_state, which indicates whether transmitter 154 had sensed a spike in the output from temperature sensor 176 during the previous sample (step 308). If RTD_spike_state indicates that a spike had occurred, transmitter 154 resets RTD_input_state to indicate no spike (step 310). (A spike is a less serious fault and is mooted by the loss of connection.)

[0100] If RTD_input_state equals RTD_INPUT_LOST, transmitter 154 checks the resistance of temperature sensor 176 (step 314). If the resistance is less than 100 ohms (step 314), this indicates that connection with temperature sensor 176 is still lost. (Different resistance values are used in steps 304 and 314 to avoid intermittent switching of RTD_input_state if, for example, the resistance fluctuates between 79 and 81 ohms.) If connection is lost, transmitter 154 sets MV status 30a, which corresponds to temperature, to BLIND (step 316) and substitutes historical information

(step 318) about temperature for use in the recalculation steps (steps 214-18 of Fig. 12). Because density and mass flow are based, in part, on temperature, transmitter 154 sets MV statuses 30b-c to BLURRED (steps 320-22). If the resistance is greater than 100 ohms, transmitter 154 sets RTD_input state to RTD_INPUT_RECOVER, to indicate that connection has been reestablished (step 326). At this time, transmitter 154 initializes a recovery timer by setting RTD_input_count equal to zero (step 328).

[0101] If RTD_input_state equals RTD_INPUT_RECOVER, transmitter 154 merges the past and present values for temperature as discussed above (step 332). Transmitter 154 then checks to see if the recovery timeout period has expired (step 334). If it has, transmitter 154 sets RTD_input_state to RTD_INPUT_OK (step 336). If it has not, transmitter 154 sets MV status 30a to BLURRED (step 340) and increments RTD_input_count (step 342).

[0102] Fig. 15 illustrates the response of flow meter 150 to a loss of input from temperature sensor 176. At time 9, the loss of input occurs and the unvalidated temperature measurement, RMV 36a, begins to rapidly drop. At time 10, transmitter 154 sets diagnostic state 58 to indicate that a spike in the temperature input has occurred, and, in response, changes MV status 30a to DAZZLED, modifies VMV 26a and VU 28a based on past performance as discussed above, and leaves MV statuses 30b-c, VMVs 26b-c, and VUs 28b-c unchanged (though, because density and mass flow rate are partially dependent on temperature, VMVs 26b-c and VUs 28b-c include the changes to VMV 26a and VU 28a).

[0103] At time 12, the resistance of temperature sensor 176 drops sufficiently low that transmitter 154 sets diagnostic state 58 to indicate that a loss of temperature input has occurred, and, in response, changes MV status 30a to BLIND, continues to base VMV 26a and VU 28a on past performance, changes MV statuses 30b-c to BLURRED, and leaves VMVs 26b-c unchanged. Because the uncertainties of density and mass flow are based in part on the uncertainty of temperature, VUs 28b-c will increase to reflect the increase in VU 28a.

[0104] At time 48, the resistance of temperature sensor 176 increases to a sufficient level so that transmitter 154 sets diagnostic state 58 to indicate that temperature input has been recovered, and, in response, changes MV status 30a to BLURRED, initializes a recovery timer, begins merging past and present values for VMV 26a and VU 28a, and changes MV statuses 30b-c to CLEAR.

[0105] At time 72, the recovery timer expires, and transmitter 154 sets diagnostic state 58 to indicate that the temperature input is fully recovered, and, in response, changes MV status 30a to CLEAR and bases VMV 26a and VU 28a on RMV 36a and RU 62a.

[0106] Other embodiments are within the following claims.

[0107] A portion of the disclosure of this patent document contains material which is subject to copyright protection. The copyright owner has no objection to the facsimile reproduction by anyone of the patent document or patent disclosure, as it appears in the Patent and Trademark Office file or records, but otherwise reserves all copyright rights whatsoever.

Claims

1. A sensor (12) for providing a measurement and information about the validity of the measurement, said sensor comprising:

a transducer (22) for generating a data signal (44) related to the value of a variable; and
a transmitter (24) including:
means for receiving said data signal (44),

characterized in that said transmitter further includes:

means for estimating a measurement of said variable based on said data signal and for generating a first output signal (26) that is related to the estimated measurement of said variable when said data signal is non-faulty and that is based on a combination of said estimated measurement of said variable and a first past performance value of said variable when said data signal is recovering from a fault,
means for performing an uncertainty analysis in relation to the first output signal, and
means for generating a dynamic second output signal (28) based on said dynamic uncertainty analysis of the first output signal.

2. The sensor of claim 1, wherein when said sensor (12) experiences a fault, said transmitter (24) modifies said first and second output signals (26,28) to account for an impact of said fault.

3. The sensor of claim 1, wherein said transmitter (24) generates a third output signal (30) that indicates a state of reliability of said first output signal (26).

4. The sensor of claim 1, said sensor further comprising a plurality of transducers (22) that generate a plurality of data signals related to the value of one or more variables, wherein said transmitter generates said first output signal based on one or more of said data signals.
- 5 5. The sensor of claim 1 or claim 4 in which said transducer (22) or said plurality of transducers also generate a second data signal related to the value of a second variable; and in which said transmitter (24) also includes means for generating a third output signal related to a measurement of said second variable and a fourth output signal based on a dynamic uncertainty analysis of the third output signal.
- 10 6. The sensor of claim 5, wherein when said sensor (12) experiences a fault, said transmitter (24) modifies said first, second, third, and fourth output signals to account for an impact of said fault.
7. The sensor of claim 5, wherein said transmitter (24) generates a fifth output signal (30) that indicates a state of reliability of said first output signal.
- 15 8. The sensor of claim 7, wherein said transmitter (24) generates a sixth output signal (30) that indicates a state of reliability of said third output signal.
9. The sensor of claim 8, wherein said transmitter (24) generates a seventh output signal (32) that indicates an operational status of said sensor.
- 20 10. A method of providing a measurement and information about the validity of the measurement comprising the steps of:
 - 25 receiving a data signal (44) related to the value of a variable;
estimating a measurement of said variable based on said data signal;
generating a first output signal (26) that is related to the estimated measurement of said variable when said data signal is non-faulty and that is based on a combination of said estimated measurement of said variable and a first past performance value of said variable when said data signal is recovering from a fault;
30 performing a dynamic uncertainty analysis in relation to the first output signal; and
generating a second output signal (28) based on said dynamic uncertainty analysis of the first output signal.
11. The method of claim 10, wherein said first output signal is generated based on a second past performance value of said variable when said data signal is faulty.
- 35 12. The method of claim 11, wherein said second past performance value equals a value of said first output signal immediately prior to said data signal becoming faulty.
13. The method of claim 11, wherein said second past performance value equals an average of values of said first output signal.
- 40 14. The method of claim 11, wherein said second past performance value equals a combination of a value of said first output signal immediately prior to said data signal becoming faulty and an average of values of said first output signal.
- 45 15. The method of claim 10, wherein said first past performance value equals a value of said first output signal immediately prior to said data signal becoming faulty.
16. The method of claim 10, wherein said first past performance value equals an average of values of said first output signal.
- 50 17. The method of claim 10, wherein said first past performance value equals a combination of a value of said first output signal immediately prior to said data signal becoming faulty and an average of values of said first output signal.
- 55 18. The method of claim 10, wherein, when said data signal is faulty, said estimating step modifies said estimated measurement to account for an impact of said fault.

19. The method of claim 10, wherein, when said data signal is faulty, said uncertainty analysis accounts for an impact of said fault.

20. The method of claim 10, further comprising generating a third output signal (30) that indicates a state of reliability of said first output signal.

21. The method of claim 20, wherein said third output (30) signal indicates whether said data signal is faulty, non-faulty, or recovering from a fault.

22. The method of claim 10, claim 18 or claim 19 further including the steps of:

receiving a second data signal related to the value of a second variable;
estimating a measurement of said second variable based on said second data signal;
generating a third output signal related to the estimated measurement of said second variable;
performing an uncertainty analysis in relation to the third output signal; and
generating a fourth output signal based on said uncertainty analysis of the third output signal.

23. The method of claim 22, said method further including the step of determining whether said second data signal is faulty, wherein, when said second data signal is faulty, said estimating step modifies said estimated measurement of said second variable to account for an impact of said fault.

24. The method of claim 23, wherein, when said second data signal is faulty, said uncertainty analysis of said third output signal accounts for an impact of said fault.

25. The method of claim 22, said method further including the step of generating a fifth output signal (30) that indicates a state of reliability of said first output signal (26).

26. The method of claim 25, said method further including the step of generating a sixth output signal (30) that indicates a state of reliability of said third output signal.

27. A sensor according to claim 1 in which the variable is temperature and the transducer generates a data signal related to temperature.

28. A sensor according to claim 1 operable as a Coriolis flow meter for providing measurements of mass flow, density and temperature, including:

said transducer or plurality of transducers for generating a first data signal related to mass flow, a second data signal relating to density and a third data signal related to temperature;
said transmitter generating a mass flow measurement signal in response to said first, second and third data signals, a mass flow measurement signal and a first uncertainty signal based thereon, a density measurement signal and a second uncertainty signal based thereon, and a temperature measurement signal and a third uncertainty signal based thereon.

Patentansprüche

1. Ein Sensor (12) zum Liefern einer Messung bzw. eines Meßwerts und von Information über die Gültigkeit des Meßwerts, mit:

einem Signalwandler bzw. Transducer (22) zum Erzeugen eines auf den Wert einer Variablen bezogenen Datensignals (44) und
einem Meßumformer bzw. Transmitter (24) mit:
einer Einrichtung zum Empfangen des Datensignals (44),

dadurch gekennzeichnet, daß der Meßumformer bzw. Transmitter ferner aufweist:

eine Einrichtung zum Schätzen eines Meßwerts der Variablen basierend auf dem Datensignal und zum Erzeugen eines ersten Ausgangssignal (26), das auf den geschätzten Meßwert der Variablen bezogen ist, wenn

das Datensignal nicht fehlerbehaftet ist und das auf einer Kombination des geschätzten Meßwerts der Variablen mit einem ersten, früheren Leistungswert der Variablen basiert, wenn sich das Datensignal von einem Fehler erholt,

eine Einrichtung zum Durchführen einer Unbestimmtheitsanalyse in Bezug auf das erste Ausgangssignal und einer Einrichtung zum Erzeugen eines dynamischen zweiten Ausgangssignals (28) basierend auf der dynamischen Unbestimmtheitsanalyse des ersten Ausgangssignals.

2. Der Sensor gemäß Anspruch 1, wobei der Meßumformer bzw. Transmitter (24) dann, wenn der Sensor (12) einem Fehler unterliegt, die ersten und zweiten Ausgangssignale (26,28) modifiziert, um einen Einfluß des Fehlers zu berücksichtigen.

3. Der Sensor gemäß Anspruch 1, wobei der Meßumformer bzw. Transmitter (24) ein drittes Ausgangssignal (30) erzeugt, welches einen Status der Zuverlässigkeit des ersten Ausgangssignals (26) angibt.

4. Der Sensor gemäß Anspruch 1, wobei der Sensor ferner eine Mehrzahl von Signalwandlern bzw. Transducern (22) aufweist, die eine Mehrzahl von auf den Wert einer oder mehreren Variablen bezogene Datensignale erzeugen, wobei der Meßumformer bzw. Transmitter das erste Ausgangssignal basierend auf einem oder mehreren der Datensignale erzeugt.

5. Der Sensor gemäß Anspruch 1 oder 4, bei dem der Signalwandler bzw. Transducer (22) oder die Mehrzahl von Signalwandlern bzw. Transducern ferner ein zweites, auf den Wert einer zweiten Variablen bezogenes Datensignal erzeugen und bei dem der Meßumformer bzw. Transmitter (24) ferner eine Einrichtung zum Erzeugen eines dritten Ausgangssignals, welches auf einen Meßwert der zweiten Variablen bezogen ist, sowie eines vierten Ausgangssignals basierend auf einer dynamischen Unbestimmtheitsanalyse des dritten Ausgangssignals umfaßt.

6. Der Sensor gemäß Anspruch 5, wobei der Meßumformer bzw. Transmitter (24) dann, wenn der Sensor (12) einem Fehler unterliegt, die ersten, zweiten, dritten und vierten Ausgangssignale modifiziert, um eine Auswirkung des Fehlers zu berücksichtigen.

7. Der Sensor gemäß Anspruch 5, wobei der Meßumformer bzw. Transmitter (24) ein fünftes Ausgangssignal (30) erzeugt, welches einen Status der Zuverlässigkeit des ersten Ausgangssignals angibt.

8. Der Sensor gemäß Anspruch 7, wobei der Meßumformer bzw. Transmitter (24) ein sechstes Ausgangssignal (30) erzeugt, welches einen Status der Zuverlässigkeit des dritten Ausgangssignals angibt.

9. Der Sensor gemäß Anspruch 8, wobei der Meßumformer bzw. Transmitter (24) ein siebtes Ausgangssignal (32) erzeugt, welches einen Betriebszustand des Sensors angibt.

10. Ein Verfahren zum Liefern einer Messung bzw. eines Meßwerts und von Information über die Gültigkeit der Messung bzw. des Meßwerts, mit den Schritten:

Empfangen eines auf den Wert einer Variablen bezogenen Datensignals (44),

Schätzen eines Meßwerts der Variablen basierend auf dem Datensignal,

Erzeugen eines ersten Ausgangssignals (26), das auf den geschätzten Meßwert der Variablen bezogen ist, wenn das Datensignal nicht fehlerbehaftet ist und das auf einer Kombination des geschätzten Meßwerts der Variablen mit einem ersten, früheren Leistungswert der Variablen basiert, wenn sich das Datensignal von einem Fehler erholt,

Durchführen einer dynamischen Unbestimmtheitsanalyse in Bezug auf das erste Ausgangssignal und

Erzeugen eines zweiten Ausgangssignals (28) basierend auf der dynamischen Unbestimmtheitsanalyse des ersten Ausgangssignals.

11. Das Verfahren gemäß Anspruch 10, wobei das erste Ausgangssignal basierend auf einem zweiten, früheren Leistungswert der Variablen erzeugt wird, wenn das Datensignal fehlerbehaftet ist.

12. Das Verfahren gemäß Anspruch 11, wobei der zweite, frühere Leistungswert einem Wert des ersten Ausgangssignals unmittelbar vor dem fehlerhaft werden des Datensignals entspricht.

13. Das Verfahren gemäß Anspruch 11, wobei der zweite, frühere Leistungswert einem Durchschnitt von Werten des

ersten Ausgangssignals entspricht.

14. Das Verfahren gemäß Anspruch 11, wobei der zweite, frühere Leistungswert einer Kombination eines Werts des ersten Ausgangssignals unmittelbar vor dem fehlerhaft werden des Datensignals mit einem Durchschnitt von Werten des ersten Ausgangssignals entspricht.
15. Das Verfahren gemäß Anspruch 10, wobei der erste, frühere Leistungswert einem Wert des ersten Ausgangssignals unmittelbar vor dem fehlerhaft werden des Datensignals entspricht.
16. Das Verfahren gemäß Anspruch 10, wobei der erste, frühere Leistungswert einem Durchschnitt von Werten des ersten Ausgangssignals entspricht.
17. Das Verfahren gemäß Anspruch 10, wobei der erste, frühere Leistungswert einer Kombination eines Werts des ersten Ausgangssignals unmittelbar vor dem fehlerhaft werden des Datensignals mit einem Durchschnitt von Werten des ersten Ausgangssignals entspricht.
18. Das Verfahren gemäß Anspruch 10, wobei dann, wenn das Datensignal fehlerbehaftet ist, der Schätzschritt den geschätzten Meßwert modifiziert, um eine Auswirkung des Fehlers zu berücksichtigen.
19. Das Verfahren gemäß Anspruch 10, wobei dann, wenn das Datensignal fehlerbehaftet ist, die Unbestimmtheitsanalyse eine Auswirkung des Fehlers berücksichtigt.
20. Das Verfahren gemäß Anspruch 10, ferner mit einem Schritt des Erzeugens eines dritten Ausgangssignals (30), welches einen Status der Zuverlässigkeit des ersten Ausgangssignals angibt.
21. Das Verfahren gemäß Anspruch 20, wobei das dritte Ausgangssignal (30) angibt, ob das Datensignal fehlerbehaftet oder nicht fehlerbehaftet ist oder sich von einem Fehler erholt.
22. Das Verfahren gemäß Anspruch 10, 18 oder 19, ferner mit den Schritten:
Empfangen eines auf den Wert einer zweiten Variablen bezogenen zweiten Datensignals,
Schätzen eines Meßwerts der zweiten Variablen basierend auf dem zweiten Datensignal,
Erzeugen eines dritten Ausgangssignals, das auf den geschätzten Meßwert der zweiten Variablen bezogen ist,
Durchführen einer Unbestimmtheitsanalyse in Bezug auf das dritte Ausgangssignal und
Erzeugen eines vierten Ausgangssignals basierend auf der Unbestimmtheitsanalyse des dritten Ausgangssignals.
23. Das Verfahren gemäß Anspruch 22, wobei das Verfahren ferner den Schritt des Bestimmens, ob das zweite Datensignal fehlerbehaftet ist, aufweist, wobei dann, wenn das zweite Datensignal fehlerbehaftet ist, der Schätzschritt den geschätzten Meßwert der zweiten Variablen modifiziert, um eine Auswirkung des Fehlers zu berücksichtigen.
24. Das Verfahren gemäß Anspruch 23, wobei dann, wenn das zweite Datensignal fehlerbehaftet ist, die Unbestimmtheitsanalyse des dritten Ausgangssignals eine Auswirkung des Fehlers berücksichtigt.
25. Das Verfahren gemäß Anspruch 22, wobei das Verfahren ferner den Schritt des Erzeugens eines fünften Ausgangssignals (30), welches einen Status der Zuverlässigkeit des ersten Ausgangssignals (26) angibt, umfaßt.
26. Das Verfahren gemäß Anspruch 25, wobei das Verfahren ferner den Schritt des Erzeugens eines sechsten Ausgangssignals (30), welches einen Status der Zuverlässigkeit des dritten Ausgangssignals angibt, umfaßt.
27. Ein Sensor gemäß Anspruch 1, bei dem die Variable eine Temperatur ist und der Signalwandler bzw. Transducer ein auf Temperatur bezogenes Datensignal erzeugt.
28. Ein Sensor gemäß Anspruch 1, betreibbar als eine Koriolis-Durchflußmeßeinrichtung zum Liefern von Messungen bzw. Meßwerten von Massenfluß, Dichte sowie Temperatur, mit:

dem Signalwandler bzw. Transducer oder der Mehrzahl von Signalwandlern bzw. Transducern zum Erzeugen eines ersten, auf Massenfluß bezogenen Datensignals, eines sich auf Dichte beziehenden zweiten Datensignals

gnals sowie eines auf Temperatur bezogenen dritten Datensignals, wobei der Meßumformer bzw. Transmitter ein Massenfluß-Meßsignal in Antwort auf die ersten, zweiten und dritten Datensignale, ein Massenfluß-Meßsignal sowie ein darauf basierendes erstes Unbestimmtheitssignal, ein Dichte-Meßsignal sowie ein darauf basierendes zweites Unbestimmtheitssignal und ein Temperatur-Meßsignal sowie ein darauf basierendes drittes Unbestimmtheitssignal erzeugt.

Revendications

1. Détecteur (12) destiné à délivrer une mesure et des informations concernant la validité de la mesure, ledit détecteur comportant :

un transducteur (22) destiné à générer un signal de données (44) lié à la valeur d'une variable, et un émetteur (24) comprenant :

des moyens pour recevoir ledit signal de données (44),

caractérisé en ce que ledit émetteur comprend en outre :

des moyens pour estimer une mesure de ladite variable sur la base dudit signal de données et générer un premier signal de sortie (26) qui est lié à la mesure estimée de ladite variable lorsque ledit signal de données n'est pas anormal et qui est basé sur une combinaison de ladite mesure estimée de ladite variable et d'une première valeur antérieure de ladite variable lorsque ledit signal de données résulte d'une anomalie, des moyens pour effectuer une analyse d'incertitude en relation avec le premier signal de sortie, et des moyens pour générer un deuxième signal de sortie dynamique (28) sur la base de ladite analyse d'incertitude dynamique effectuée en relation avec le premier signal de sortie.

2. Détecteur selon la revendication 1, dans lequel, lorsque ledit détecteur (12) présente une anomalie, ledit émetteur (24) modifie lesdits premier et deuxième signaux de sortie (26, 28) pour tenir compte de l'impact de ladite anomalie.

3. Détecteur selon la revendication 1, dans lequel ledit émetteur (24) génère un troisième signal de sortie (30) qui indique un état de fiabilité dudit premier signal de sortie (26).

4. Détecteur selon la revendication 1, ledit détecteur comportant en outre une pluralité de transducteurs (22) qui génèrent une pluralité de signaux de données liés à la valeur d'une ou plusieurs variables, ledit émetteur générant ledit premier signal de sortie sur la base d'un ou plusieurs desdits signaux de données.

5. Détecteur selon la revendication 1 ou 4, dans lequel ledit transducteur (223) ou ladite pluralité de transducteurs génèrent aussi un second signal de données lié à la valeur d'une seconde variable ; et dans lequel ledit émetteur (24) comprend aussi des moyens pour générer un troisième signal de sortie lié à une mesure de ladite seconde variable et un quatrième signal de sortie sur la base d'une analyse d'incertitude dynamique effectuée en relation avec le troisième signal de sortie.

6. Détecteur selon la revendication 5, dans lequel, lorsque le détecteur (12) présente une anomalie, ledit émetteur (24) modifie lesdits premier, deuxième, troisième et quatrième signaux de sortie afin de tenir compte de l'impact de ladite anomalie.

7. Détecteur selon la revendication 5, dans lequel ledit émetteur (24) génère un cinquième signal de sortie (30) qui indique un état de fiabilité dudit premier signal de sortie.

8. Détecteur selon la revendication 7, dans lequel ledit émetteur (24) génère un sixième signal de sortie (30) qui indique un état de fiabilité dudit troisième signal de sortie.

9. Détecteur selon la revendication 8, dans lequel ledit émetteur (24) génère un septième signal de sortie (32) qui indique un état opératoire dudit détecteur.

10. Procédé pour délivrer une mesure et des informations concernant la validité de la mesure, comportant les étapes consistant à :

recevoir un signal de données (44) lié à la valeur d'une variable ;
 estimer une mesure de ladite variable sur la base dudit signal de données ;
 générer un premier signal de sortie (26) qui est lié à la mesure estimée de ladite variable lorsque ledit signal
 de données n'est pas anormal et qui est basé sur une combinaison de ladite mesure estimée de ladite variable
 et d'une première valeur antérieure de ladite variable lorsque ledit signal de données résulte d'une anomalie ;
 effectuer une analyse d'incertitude dynamique en relation avec le premier signal de sortie, et
 générer un deuxième signal de sortie (28) sur la base de ladite analyse d'incertitude dynamique effectuée en
 relation avec le premier signal de sortie.

11. Procédé selon la revendication 10, dans lequel ledit premier signal de sortie est généré sur la base d'une seconde
 valeur antérieure de ladite variable lorsque ledit signal de données est anormal.

12. Procédé selon la revendication 11, dans lequel ladite seconde valeur antérieure est égale à une valeur dudit
 premier signal de sortie immédiatement avant que ledit signal de données ne devienne anormal.

13. Procédé selon la revendication 11, dans lequel ladite seconde valeur antérieure est égale à une moyenne de
 valeurs dudit premier signal de sortie.

14. Procédé selon la revendication 11, dans lequel ladite seconde valeur antérieure est égale à une combinaison d'une
 valeur dudit premier signal de sortie immédiatement avant que ledit signal de données ne devienne anormal et
 d'une moyenne de valeurs dudit premier signal de sortie.

15. Procédé selon la revendication 10, dans lequel ladite première valeur antérieure est égale à une valeur dudit
 premier signal de sortie immédiatement avant que ledit signal de données ne devienne anormal.

16. Procédé selon la revendication 10, dans lequel ladite première valeur antérieure est égale à une moyenne de
 valeurs dudit premier signal de sortie.

17. Procédé selon la revendication 10, dans lequel ladite première valeur antérieure est égale à une combinaison
 d'une valeur dudit premier signal de sortie immédiatement avant que ledit signal de données ne devienne anormal
 et d'une moyenne de valeurs dudit premier signal de sortie.

18. Procédé selon la revendication 10, dans lequel, lorsque ledit signal de données est anormal, ladite étape d'esti-
 mation modifie ladite mesure estimée pour tenir compte de l'impact de ladite anomalie.

19. Procédé selon la revendication 10, dans lequel, lorsque ledit signal de données est anormal, ladite analyse d'in-
 certitude tient compte de l'impact de ladite anomalie.

20. Procédé selon la revendication 10, consistant en outre à générer un troisième signal de sortie (30) qui indique un
 état de fiabilité dudit premier signal de sortie.

21. Procédé selon la revendication 20, dans lequel ledit troisième signal de sortie (30) indique si ledit signal de données
 est anormal, normal ou résulte d'une anomalie.

22. Procédé selon la revendication 10, 18 ou 19, comportant en outre les étapes consistant à :

recevoir un second signal de données lié à la valeur d'une seconde variable,
 estimer une mesure de ladite seconde variable sur la base dudit second signal de données,
 générer un troisième signal de sortie lié à la mesure estimée de ladite seconde variable,
 effectuer une analyse d'incertitude en relation avec le troisième signal de sortie, et
 générer un quatrième signal de sortie sur la base de ladite analyse d'incertitude effectuée en relation avec le
 troisième signal de sortie.

23. Procédé selon la revendication 22, ledit procédé comportant en outre l'étape consistant à déterminer si ledit second
 signal de données est anormal, dans lequel, lorsque ledit second signal de données est anormal, ladite étape
 d'estimation modifie ladite mesure estimée de ladite seconde variable pour tenir compte de l'impact de ladite
 anomalie.

24. Procédé selon la revendication 23, dans lequel, lorsque ledit second signal de données est anormal, ladite analyse d'incertitude effectuée en relation avec ledit troisième signal de sortie tient compte de l'impact de ladite anomalie.

25. Procédé selon la revendication 22, ledit procédé comportant en outre l'étape consistant à générer un cinquième signal de sortie (30) qui indique un état de fiabilité dudit premier signal de sortie (26).

26. Procédé selon la revendication 25, ledit procédé comportant en outre l'étape consistant à générer un sixième signal de sortie (30) qui indique un état de fiabilité dudit troisième signal de sortie.

27. Détecteur selon la revendication 1, dans lequel la variable est une température et le transducteur génère un signal de données lié à la température.

28. Détecteur selon la revendication 1, pouvant être utilisé comme un débitmètre du type Coriolis pour délivrer des mesures de débit, de densité et de température, comprenant :

ledit transducteur ou une pluralité de transducteurs pour générer un premier signal de données lié au débit, un deuxième signal de données lié à la densité et un troisième signal de données lié à la température, ledit émetteur générant un signal de mesure de débit massique en réponse auxdits premier, deuxième et troisième signaux de données, un signal de mesure de débit massique et un premier signal d'incertitude basé sur celui-ci, un signal de mesure de densité et un deuxième signal d'incertitude basé sur celui-ci, et un signal de mesure de température et un troisième signal d'incertitude basé sur celui-ci.

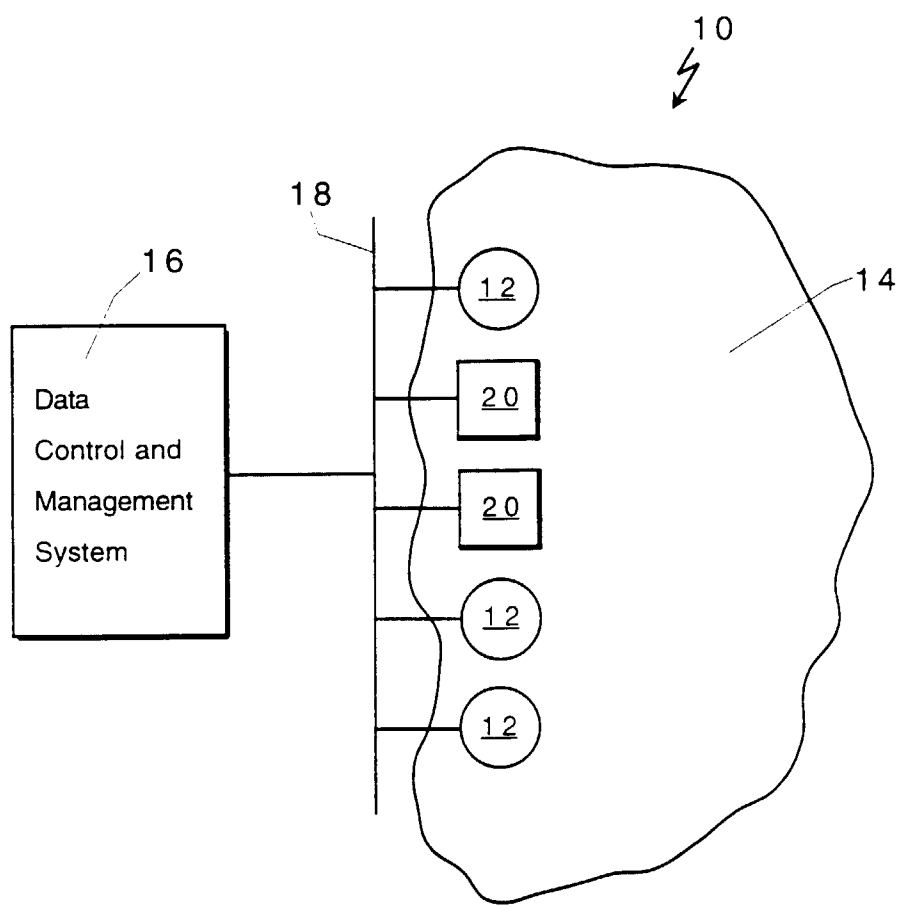


FIG. 1

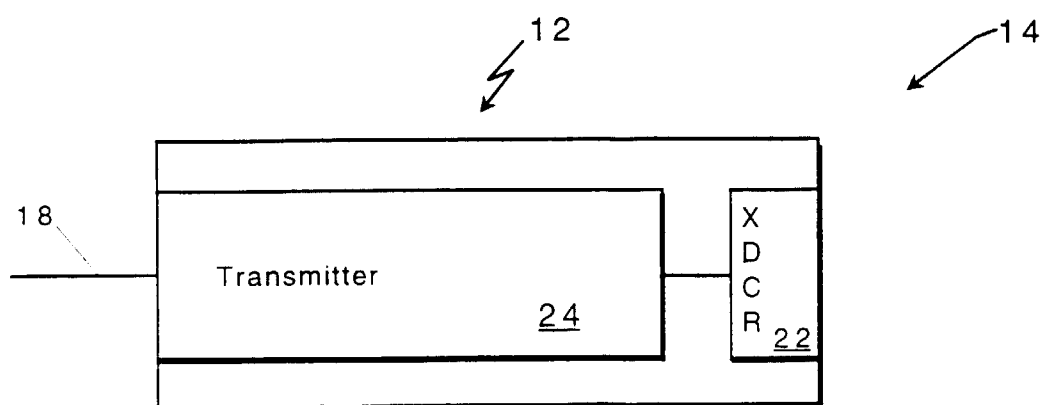


FIG. 2

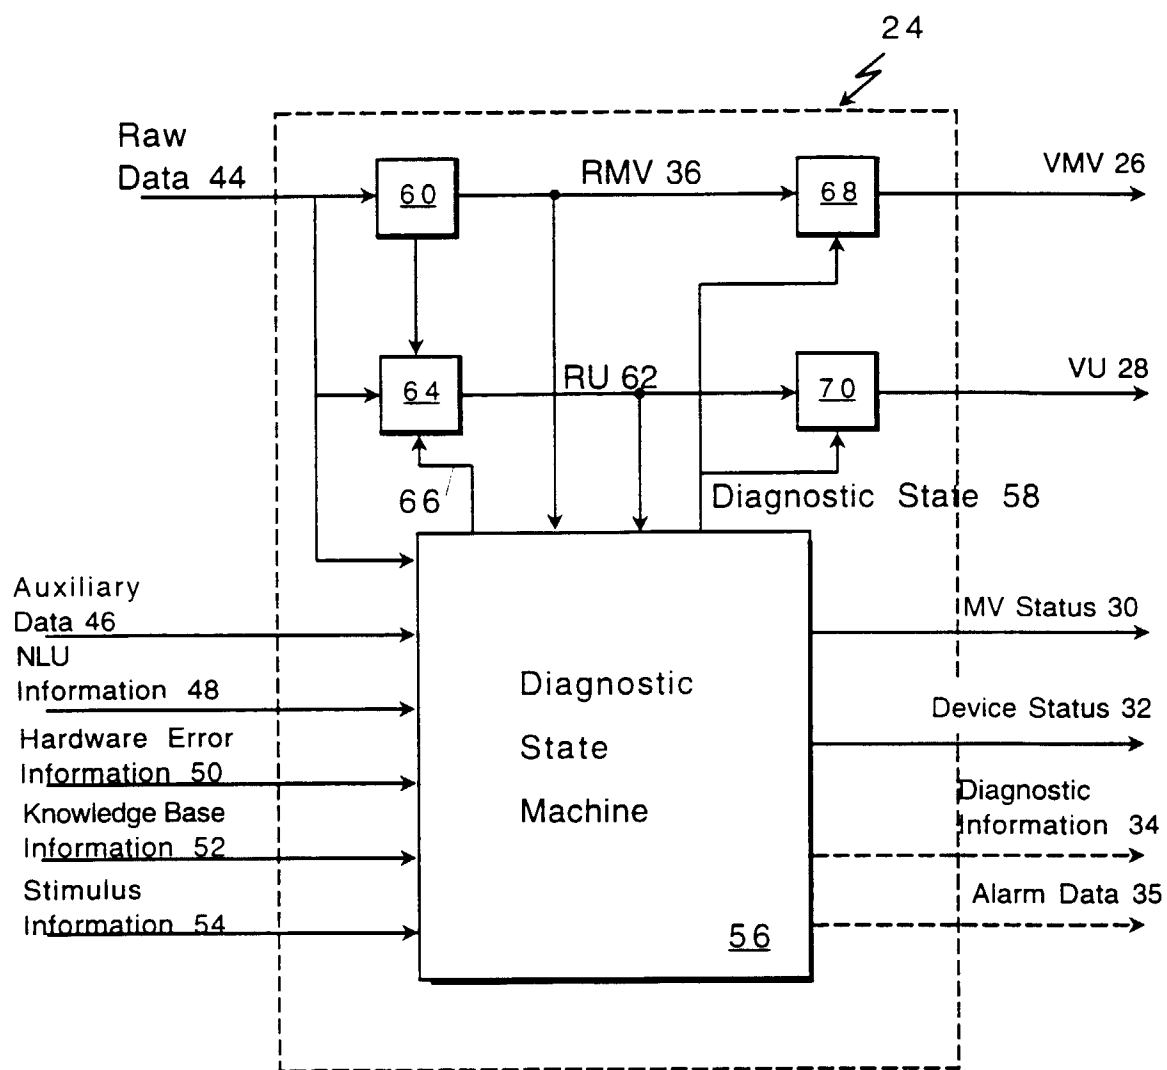


FIG. 3

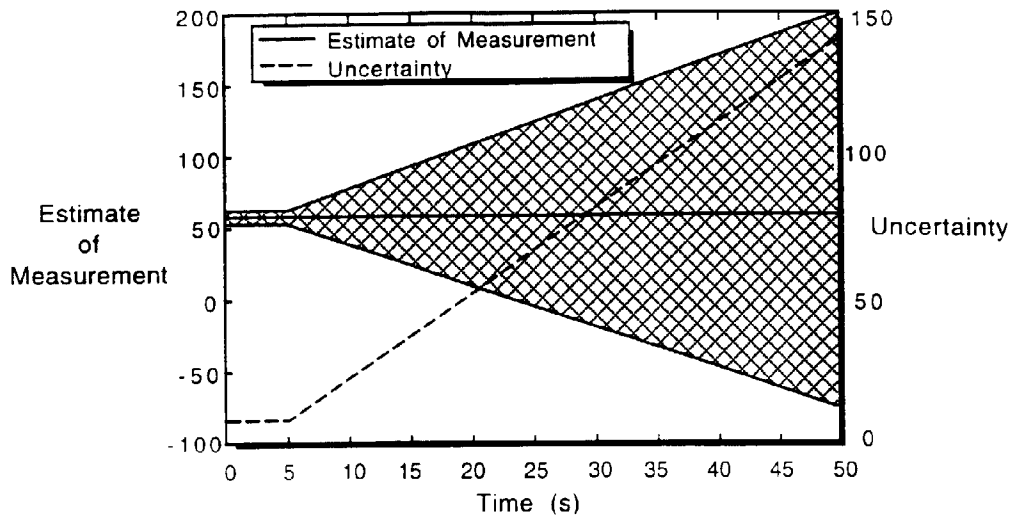


FIG. 4a

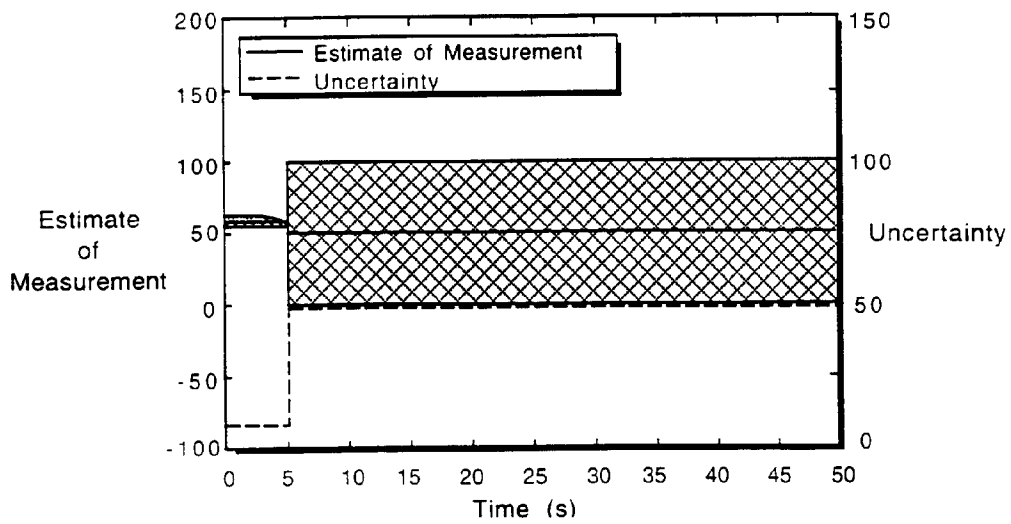


FIG. 4b

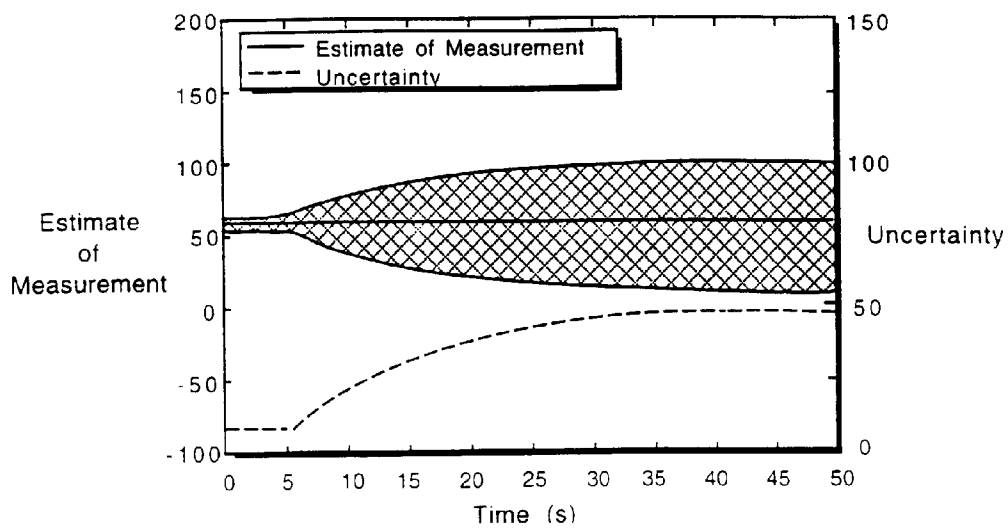


FIG. 4c

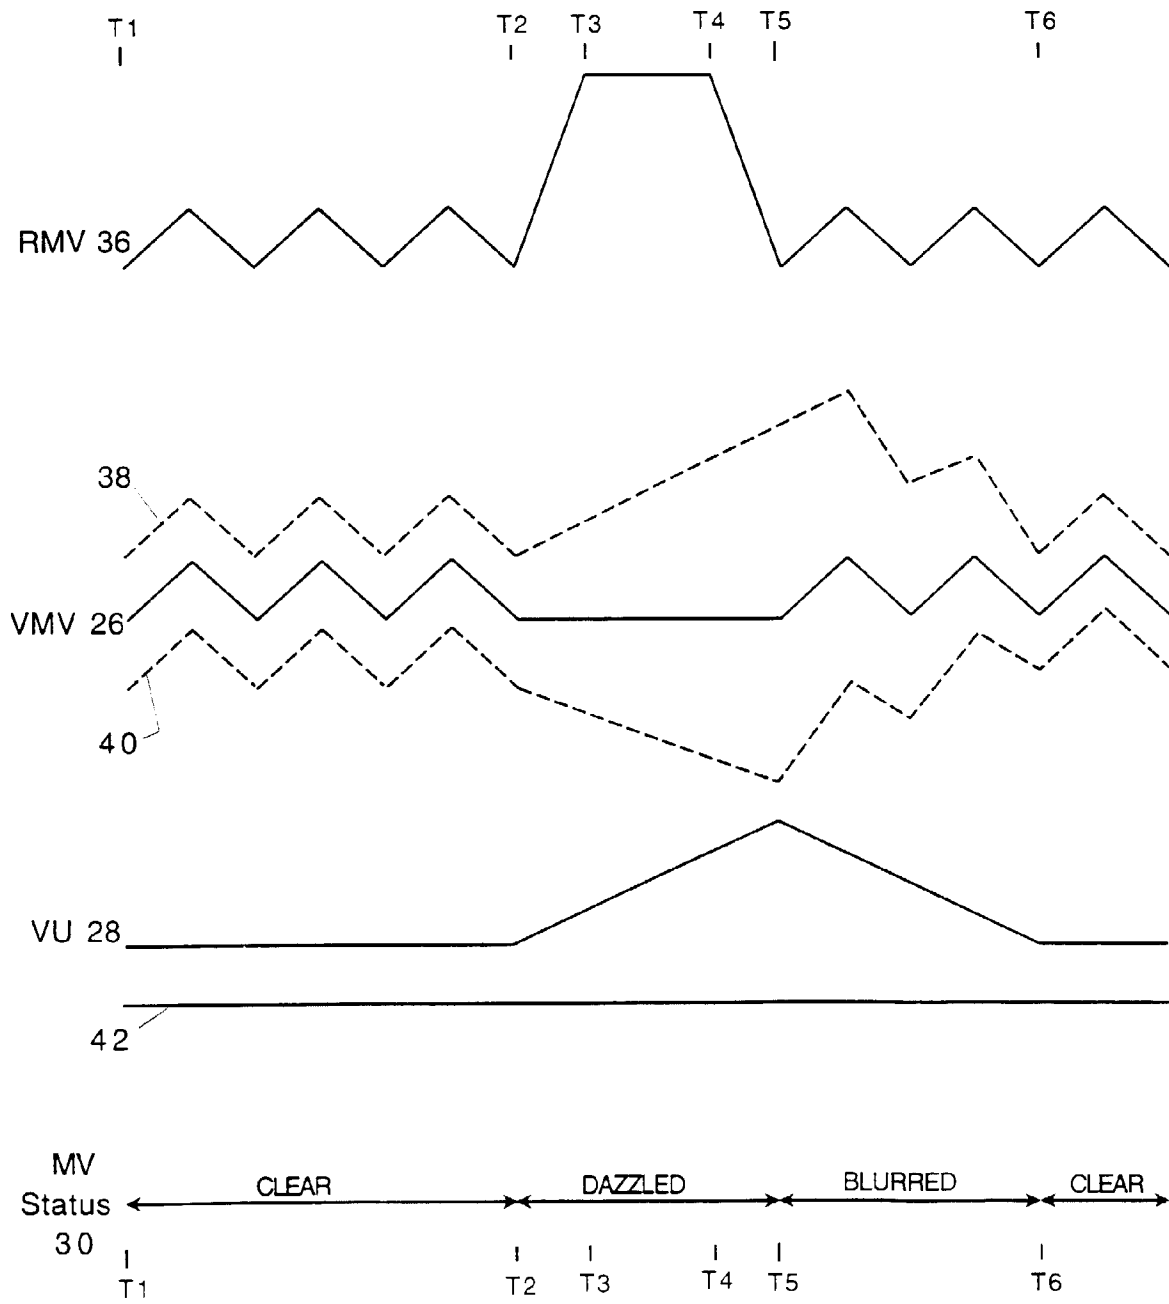


FIG. 5

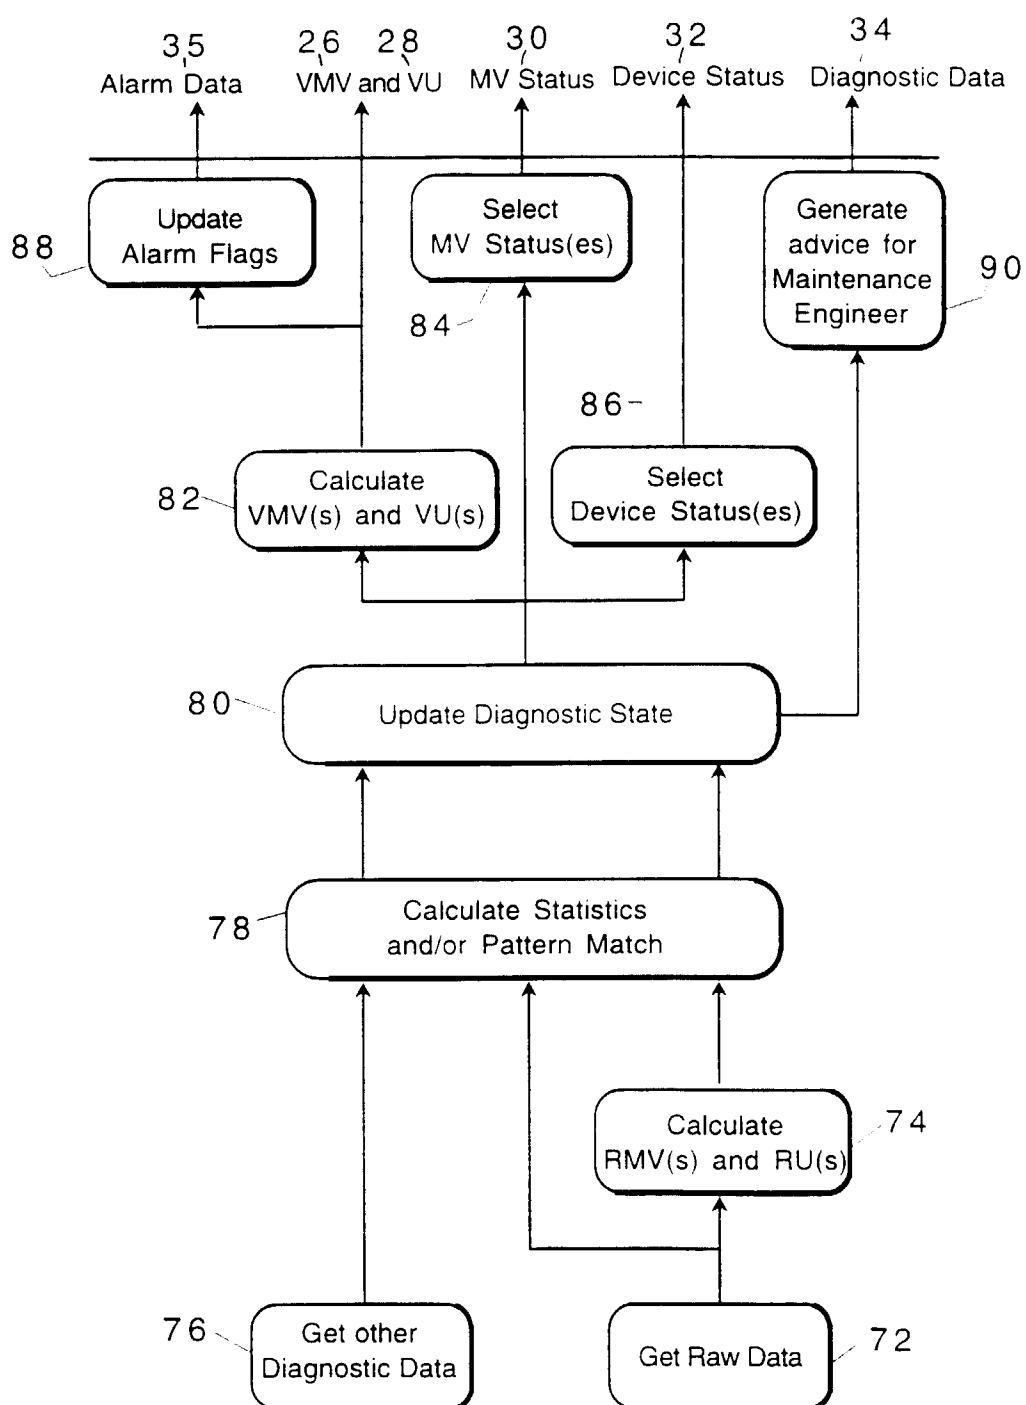


FIG. 6

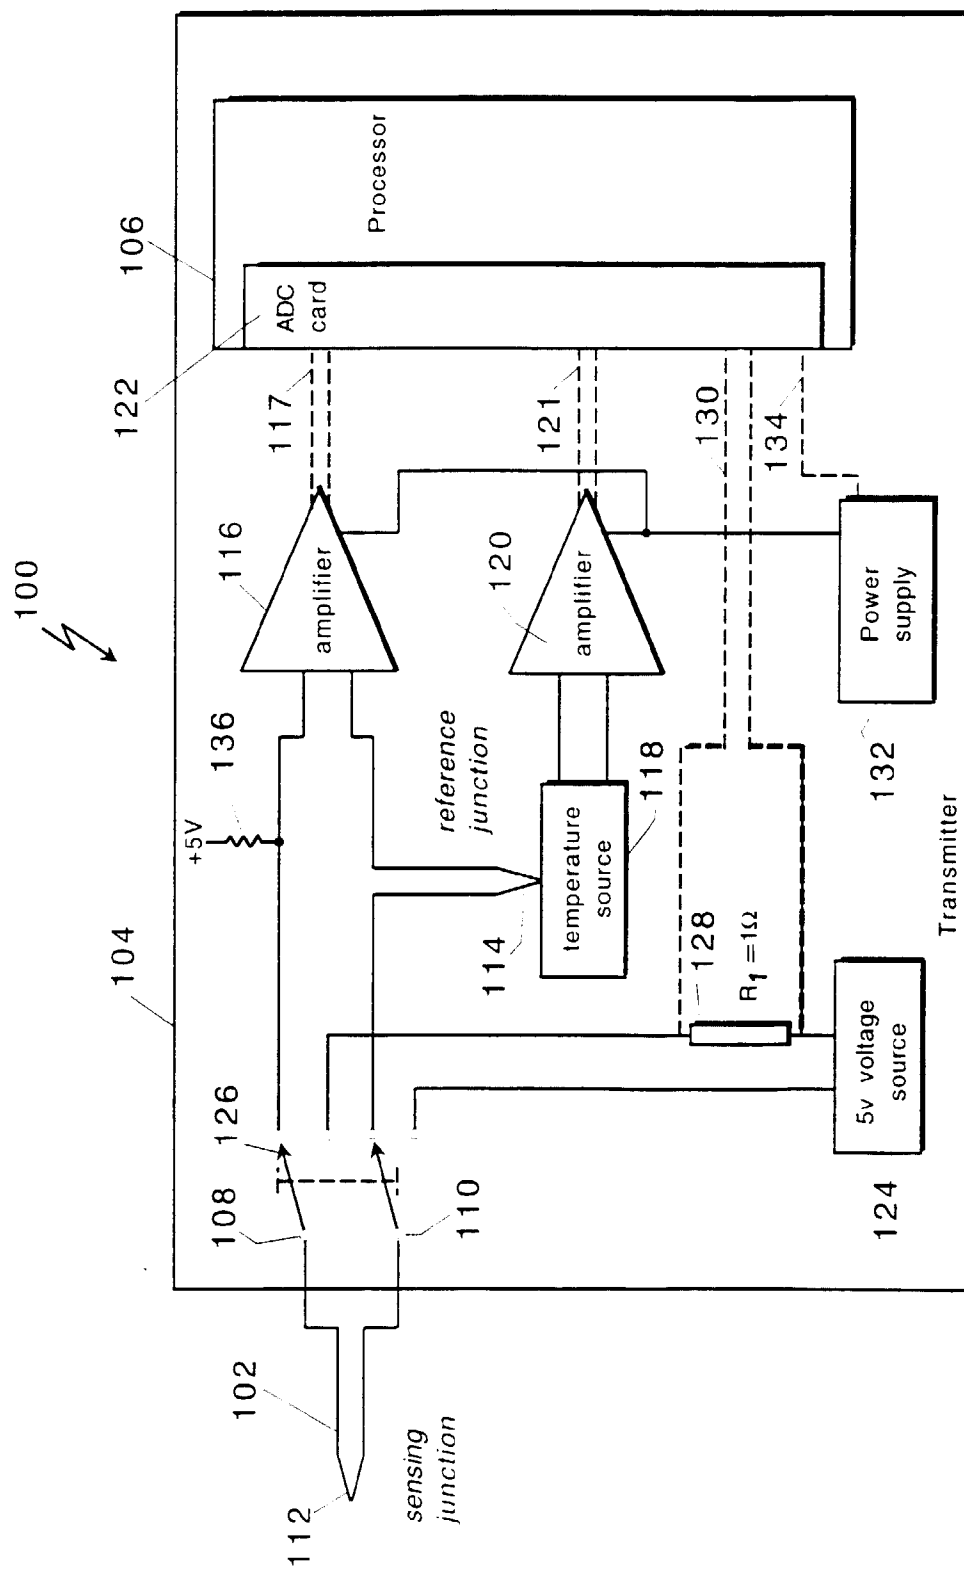


FIG. 7

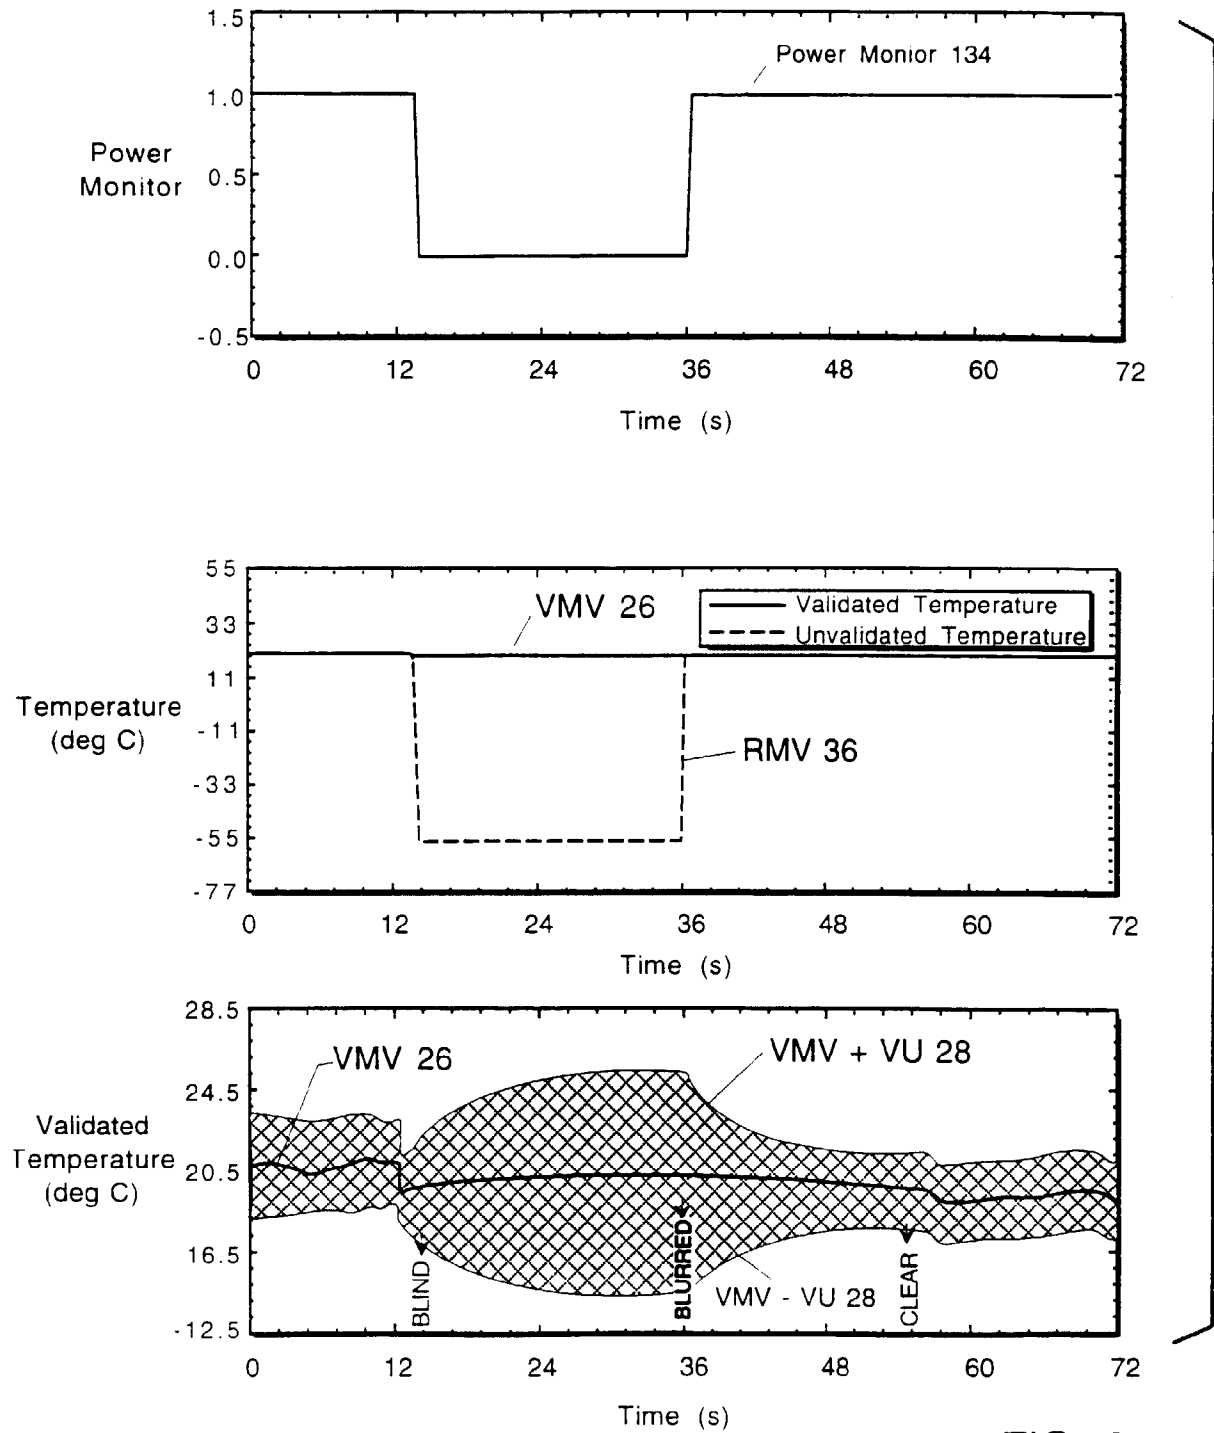


FIG. 8

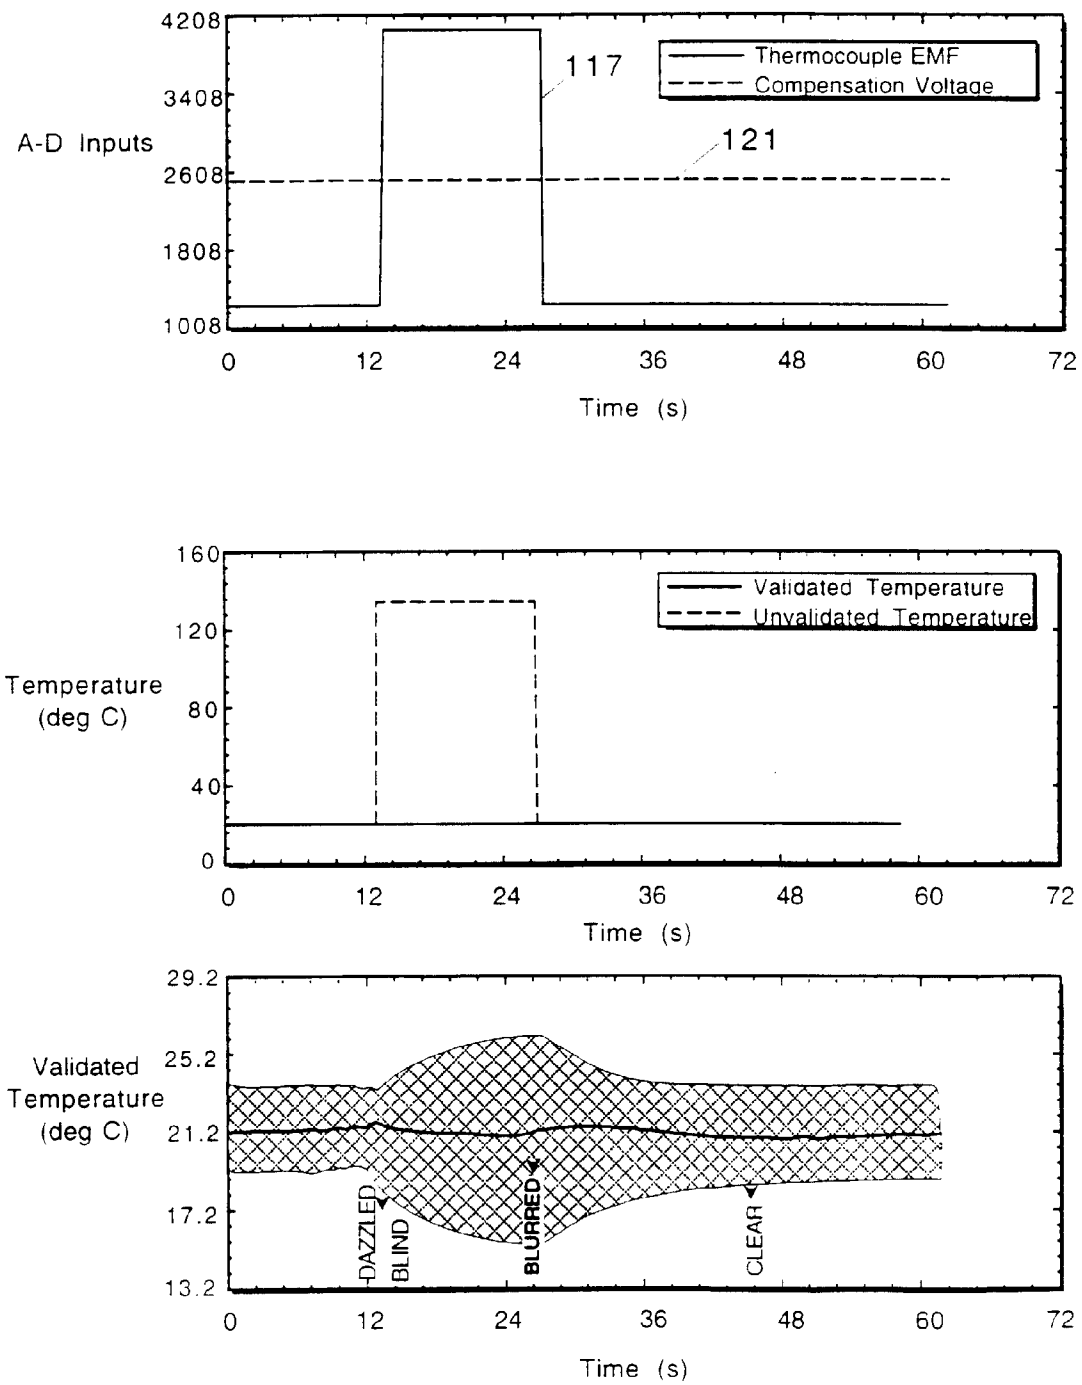


FIG. 9

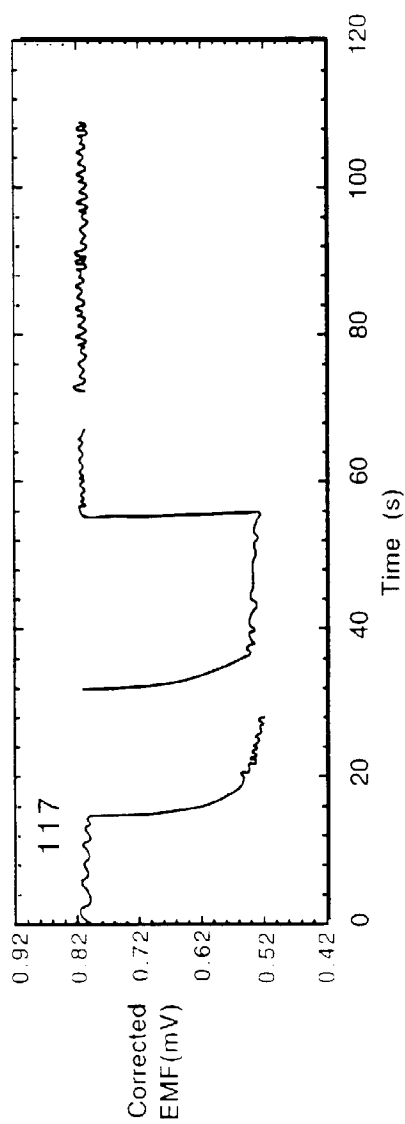


FIG. 10-1

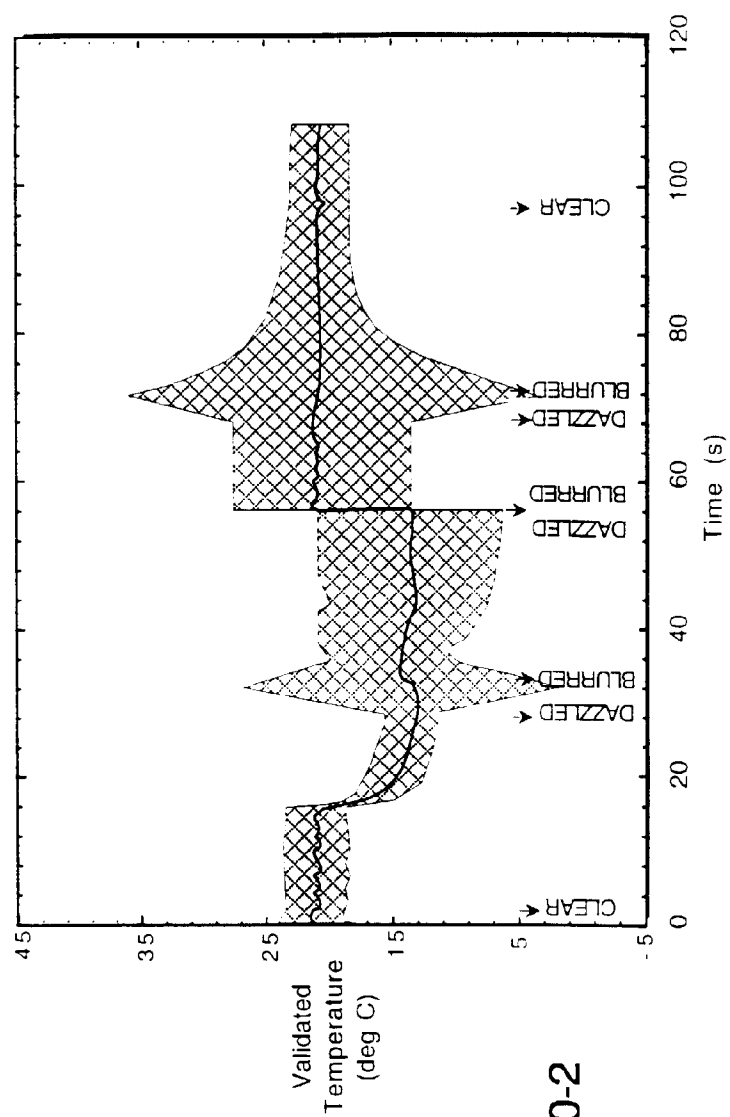


FIG. 10-2

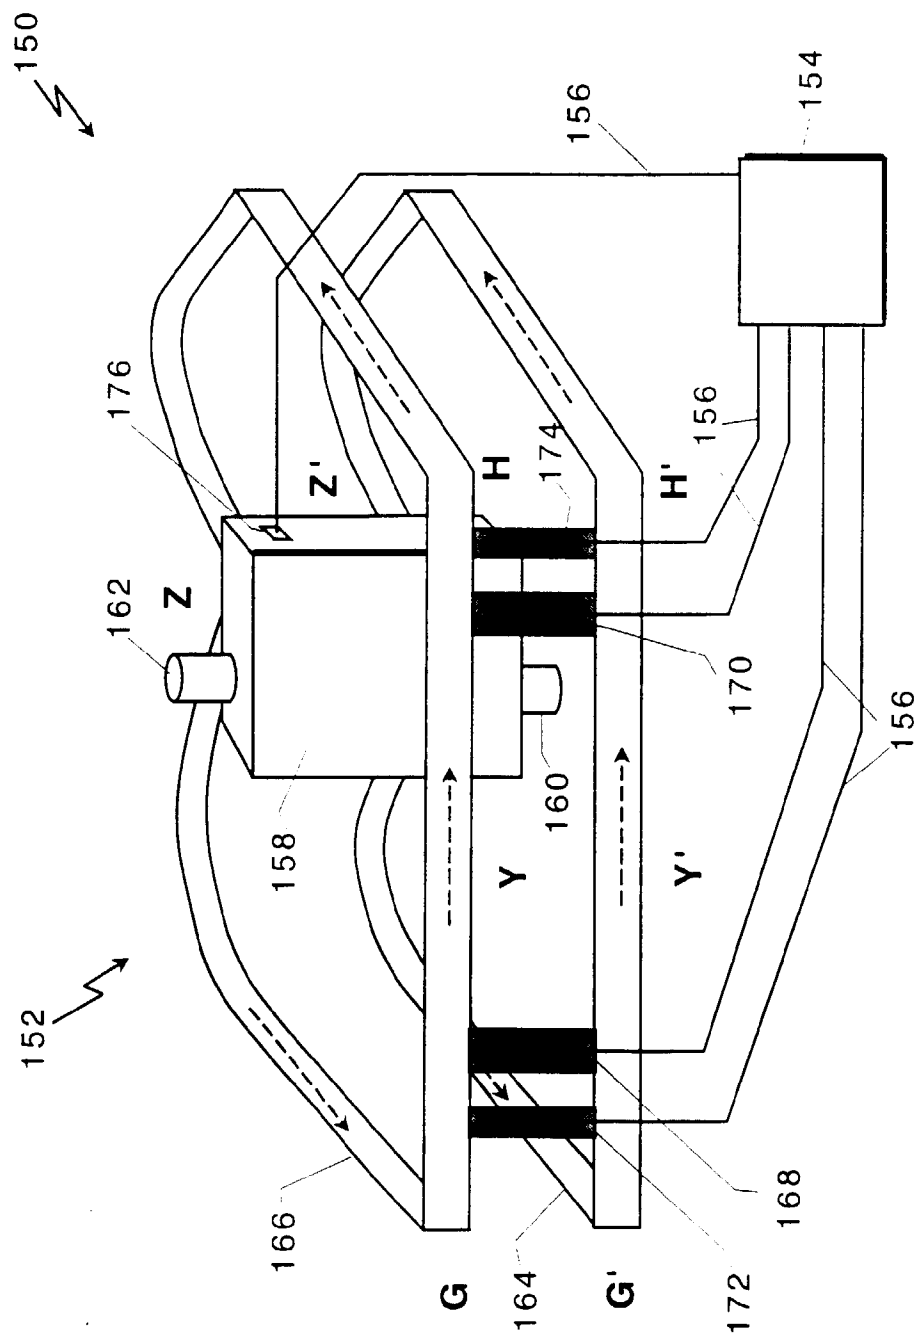


FIG. 11

<u>Step/ (Fig. 6 step)</u>	<u>Action</u>
200 (72)	Get raw data.
202 (74)	Calculate temperature RMV and RU.
204 (74)	Calculate density RMV and RU.
206 (74)	Calculate mass flow RMV and RU.
208 (74)	Consider all inputs.
210 (78, 80, 84, 86)	Make diagnosis.
212 (80)	Correct all inputs.
214 (82)	Calculate temperature VMV and VU.
216 (82)	Calculate density VMV and VU.
218 (82)	Calculate mass flow VMV and VU.

FIG. 12

<u>Step</u>	<u>Action</u>
250	$R = (RK1 * tran_temp + RK2) * f_RTD + RK3 * tran_temp + RK4$ [RK1-4 are calibration constants, tran_temp is the temperature of transmitter 154, and f_RTD is the frequency of the signal coming out of RTD temperature sensor 176.]
252	$d_R = \sqrt{ \begin{aligned} & \text{sqr} (tran_temp * f_RTD * d_RK1) + \\ & \text{sqr} (f_RTD * d_RK2) + \\ & \text{sqr} (tran_temp * d_RK3) + \\ & \text{sqr} (d_RK4) + \\ & \text{sqr} ((RK1 * f_RTD + RK3) * \\ & \quad d_tran_temp) + \\ & \text{sqr} ((RK1 * tran_temp + RK2) * \\ & \quad d_f_RTD) \end{aligned} }$ [d_x is the uncertainty of x.]
254	$\text{temperature} = RTD_A * R * R + RTD_B * R + RTD_C$
256	$d_temperature = (2.0 * RTD_A * R + RTD_B) * d_R$

FIG. 13

<u>Step</u>	<u>Action</u>
300	Check RTD_input_state
302	If RTD_INPUT_OK
304	If RTD_resistance < 80.0
306	RTD_input_state = RTD_INPUT_LOST
308	If RTD_spike_state <> RTD_SPIKE_OFF
310	RTD_spike_state = RTD_SPIKE_OFF
312	If RTD_INPUT_LOST
314	If RTD_resistance < 100.0
316	Temperature MV status = BLIND
318	Substitute historical temperature
320	Density MV status = BLURRED
322	Mass Flow MV status = BLURRED
324	Else
326	RTD_input_state = RTD_INPUT_RECOVER
328	RTD_input_count = 0
330	If RTD_INPUT_RECOVER
332	Merge past and present temperature
334	If RTD_input_count = 90
336	RTD_input_state = RTD_INPUT_OK
338	Else
340	Temperature MV status = BLURRED
342	Increment RTD_input_count

FIG. 14

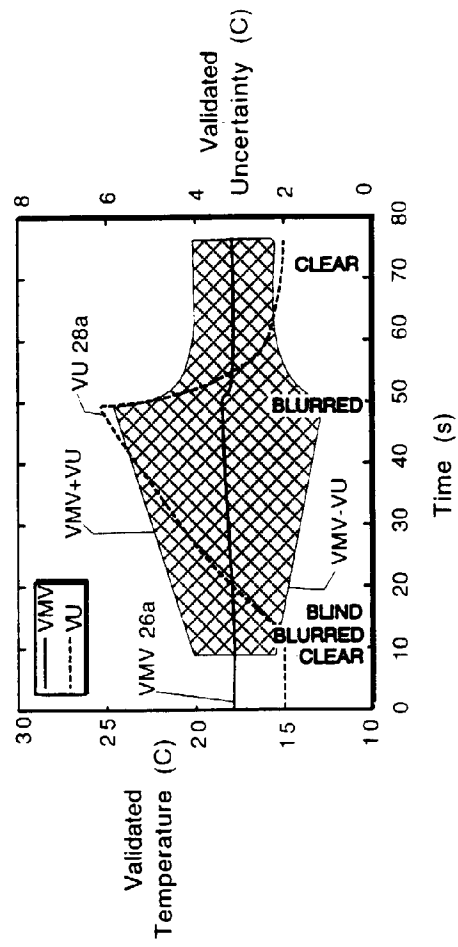


FIG. 15A-2

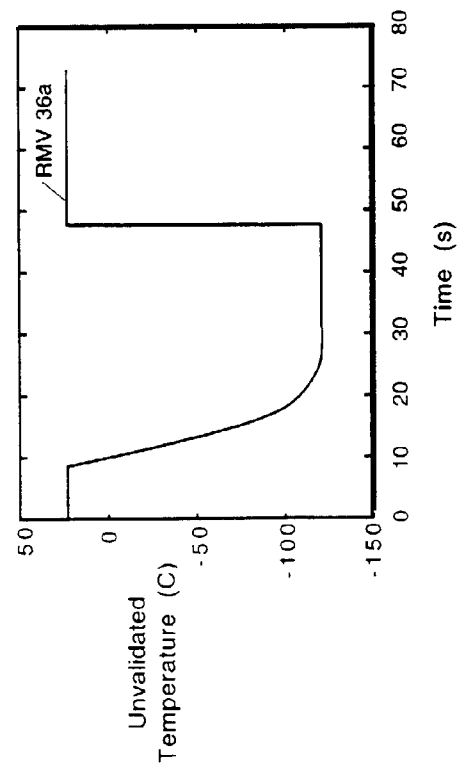


FIG. 15a-1

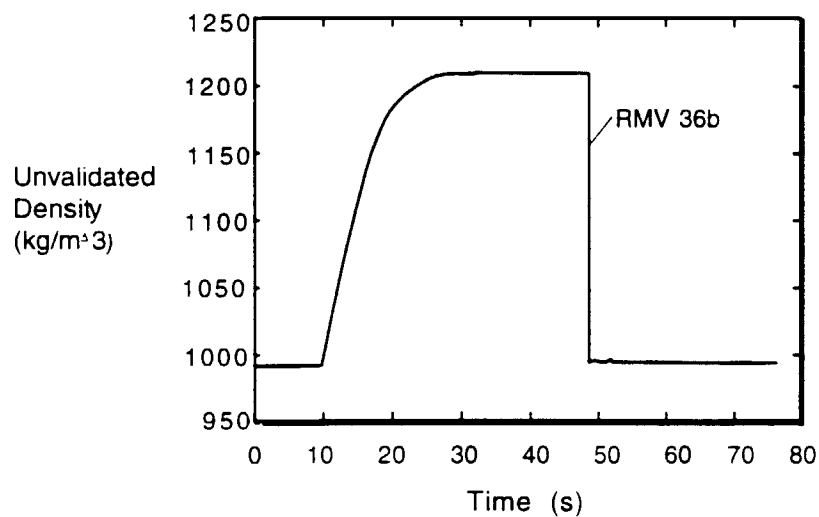


FIG. 15b-1

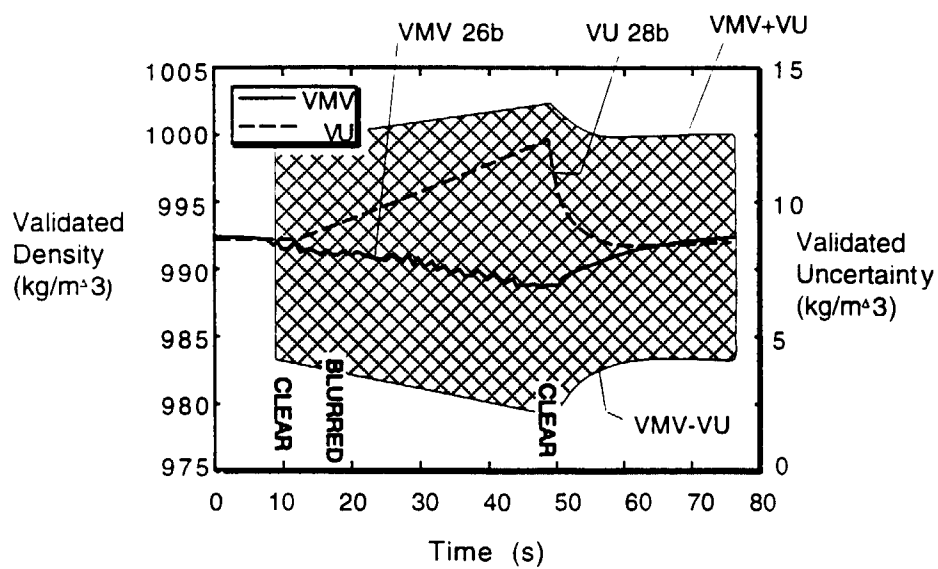


FIG. 15b-2

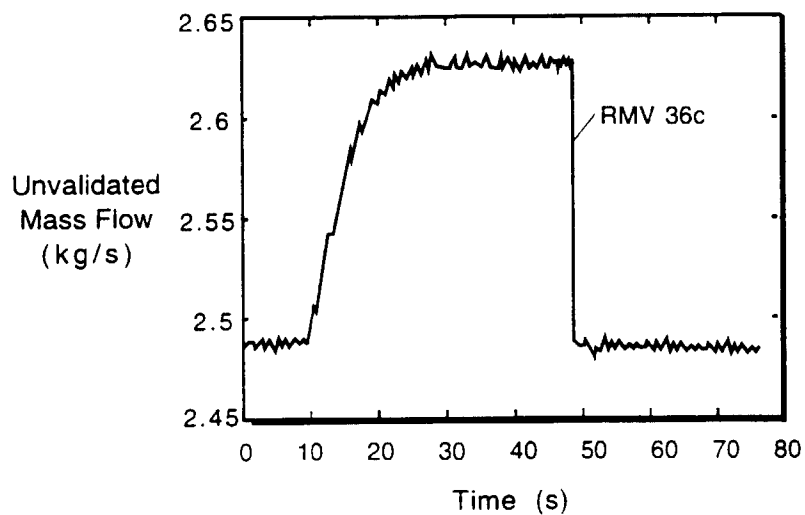


FIG. 15c-1

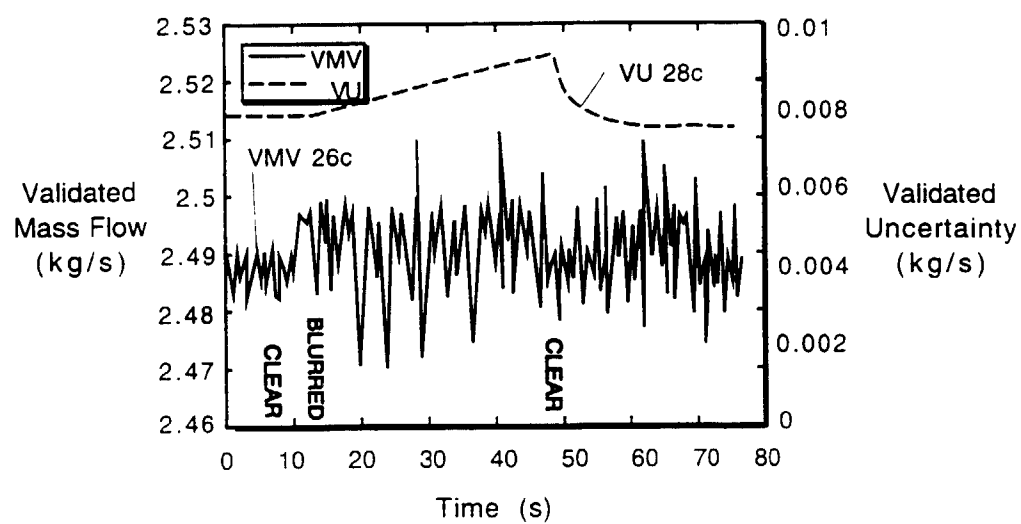


FIG. 15c-2