

Multiscale Design for System-Wide Peer-to-Peer Energy Trading

Thomas Morstyn^{1,*}, Iacopo Savelli² and Cameron Hepburn²

¹School of Engineering, University of Edinburgh, Edinburgh, EH9 3JL, UK

²Smith School of Enterprise and the Environment, University of Oxford, Oxford, OX1 3QY, UK

*Correspondence: thomas.morstyn@ed.ac.uk

SUMMARY

The integration of renewable generation and the electrification of heating and transportation are critical for the sustainable energy transition towards net-zero greenhouse gas emissions. These changes require the large-scale adoption of distributed energy resources (DERs). Peer-to-Peer (P2P) energy trading has gained attention as a new approach for incentivizing the uptake and coordination of DERs, with advantages for computational scalability, prosumer autonomy and market competitiveness. However, major unresolved challenges remain for scaling out P2P trading, including enforcing network constraints, managing uncertainty and mediating transmission/distribution conflicts. Here we propose a novel multiscale design framework for P2P trading, with inter-platform coordination mechanisms to align local transactions with system-level requirements, and analytic tools to enhance long-term planning and investment decisions by accounting for forecast real-time operation. By integrating P2P trading into planning and operation across spatial and temporal scales, the adoption of large-scale DERs is tenable and can create economic, environmental and social co-benefits.

Keywords: Distributed energy resource, flexibility, local energy market, market design, multi-agent control, multiscale design, network planning, peer-to-peer, platform, power system, spatial, temporal, timescale.

INTRODUCTION

Three major components of the sustainable energy transition towards net-zero greenhouse gas emissions are the integration of renewable generation, the electrification of transport, and the electrification of heating¹. As a result, a significant proportion of future generation and flexibility will be embedded within local distribution networks, in the form of millions of small- and medium-scale distributed energy resources (DERs), including solar and wind generation, home batteries, electric vehicles and heat pumps². For example, under the International Energy Agency's Sustainable Development Scenario, the share of electricity generation from solar and wind is 30% in 2030 (from 8% in 2019), electric vehicles account for 40% of passenger car sales in 2030 (from 2.5% in 2019) and heat pumps provide approximately 25% of the heating requirements for buildings built between 2019 and 2030³.

Given the rapid rate of DER integration necessary for the sustainable energy transition, there is an opportunity for significant additional value to be created by coordinating their planning and operation within distribution networks. Matching renewable generation with flexible demand on a localized basis reduces upstream power flows and losses, and can alleviate the need to curtail excess renewable generation due to distribution network constraints⁴. If DERs can be coordinated on a highly reliable basis, they could

also defer or avoid the need for distribution, transmission and generation infrastructure upgrades⁵. More advanced DER coordination could support additional value-streams, such as autonomous microgrid operation to maintain local security of supply during faults⁶, or the provision of flexibility services upstream to the transmission system as a virtual power plant (VPP)⁷.

Alongside the rise of DERs, smart meters have seen major rollouts, providing the infrastructure for secure consumer-level communications and monitoring, and energy management systems are now available that can automate the control of DERs based on owner preferences, resource characteristics and external price signals⁸. This creates the opportunity for DER owners to actively contribute generation and demand-flexibility to the power system. This is described as the consumer to prosumer transition (prosumer meaning either 'producer-consumer'⁹ or 'proactive-consumer'¹⁰). However, prosumers are too small to be directly integrated into existing wholesale electricity markets, which are designed to manage MW-scale resources directly connected to the transmission network. This has motivated the need for new local market mechanisms to incentivize coordination between prosumers and integrate their flexibility into the operation of the power system¹¹. Local energy market designs can be broadly divided into three categories: (i) unidirectional pricing, (ii) direct dispatch and (iii) peer-to-peer (P2P) energy trading.

The first category, unidirectional pricing, involves price signals being sent to prosumers using one-way communication, which prosumers then consider when scheduling their flexible energy resources. Time-of-use retail tariffs are a simple example¹², but more advanced platforms for aggregating demand-side flexibility can also operate on this principle¹³. Coordination can be improved by making prices more granular in terms of time and network location¹⁴. However, unidirectional pricing has two key limitations. First, good performance requires accurate forecasts and a detailed understanding of prosumer preferences and capabilities, since there is no negotiation process¹⁵. Second, DERs are coordinated as a group relative to the rest of the system, rather than relative to one another¹⁶. This is a problem for distribution networks with significant numbers of DERs, since desirable control actions for a particular DER will depend heavily on how other DER owners respond to the price signals they receive.

The second category is direct dispatch. We use this term to encompass strategies where prosumers submit bids or DER capability information to a central coordinator, which calculates DER schedules and payments for each prosumer, to provide high levels of controllability^{17,18}. Direct dispatch can be used by distribution system operators (DSOs) to create local market platforms for trading energy and flexibility¹⁹, or by VPP aggregators to manage fleets of DERs²⁰. Solving an optimal power flow problem incorporating DER characteristics and network constraints also provides locational prices which satisfy allocative efficiency, meaning that resources are allocated up to the point where the marginal benefit of consumption is equal to the marginal cost of generation and transmission²¹. Alternative pricing arrangements have also been proposed, for example based on fairness criteria²² or to prevent strategic bidding by prosumer coalitions²³.

Although direct dispatch has important theoretical advantages, there are a number of challenges for implementation, due to the reliance on a central coordinator. Prosumers need to trust that the central coordinator will operate fairly, despite limited transparency and competition. Computational scalability and privacy are also of concern²⁴. Distributed optimization strategies have been proposed to help address these issues²⁵, but they introduce significant communication overhead, and although these mechanisms resemble a competitive auction, convergence requires that prosumers act cooperatively, rather than purely pursuing their own individual objectives²⁶.

The third category is P2P energy trading, which has been gaining significant academic and industry interest as an alternative market design where prosumers negotiate directly with one another²⁷. Compared with more centralized approaches, P2P energy trading offers advantages for computational scalability since prosumers retain control over their DERs and negotiate based on individual decision-making²⁸. This reduces processing and communications infrastructure requirements and provides greater privacy. Prosumers also have autonomy and can fulfil personal

preferences and DER requirements which might otherwise be difficult to communicate to an intermediary²⁹. This is particularly relevant for prosumers with DERs that directly impact their daily lives and comfort, such as electric vehicles and smart heating. Moreover, by providing transparent negotiation protocols by which small- and medium-scale buyers and sellers can reach agreement on mutually acceptable transactions and prices, P2P energy trading can enable greater participation and engagement, thereby increasing market competitiveness³⁰.

There is unrealised potential for P2P energy trading to create economic, environmental and social value if integrated into power system planning and operation across spatial and temporal scales. Early research and trials have focused on P2P energy trading within local distribution networks, but it has been recognized that there are significant unresolved challenges for scaling out P2P energy trading across power systems. In particular, P2P energy trading relies on bilateral negotiation and prosumer-level decisions, making it challenging to (i) enforce network constraints that depend nonlinearly on the collective operation of distributed resources³¹, (ii) manage aggregated uncertainty without excessive conservatism³² and (iii) mediate conflicting requirements between the transmission and distribution levels of the power system³³. In addition, a major source of unrealized value is the opportunity for P2P energy trading platforms to reduce generation, transmission and distribution infrastructure requirements. Realizing the full value that P2P energy trading platforms can offer will require new scalable mechanisms for integrating them into how power systems are designed, how investment decisions are made, and how local flexibility is utilized during operation.

In this Perspective, we propose a novel multiscale design framework to integrate P2P energy trading as a fundamental component of how power systems are planned and operated. The proposed framework introduces new inter-platform coordination mechanisms to manage the interactions between P2P energy trading platforms and other markets where energy and flexibility are traded at different scales, as well as new analytic tools to improve the efficiency of long-term network planning and investment decisions by integrating the forecast operation of P2P energy trading platforms. This provides a new approach which addresses the unresolved challenges identified for the system-wide scale out of P2P energy trading. The proposed design framework offers new opportunities for value to be created across spatial scales (from local

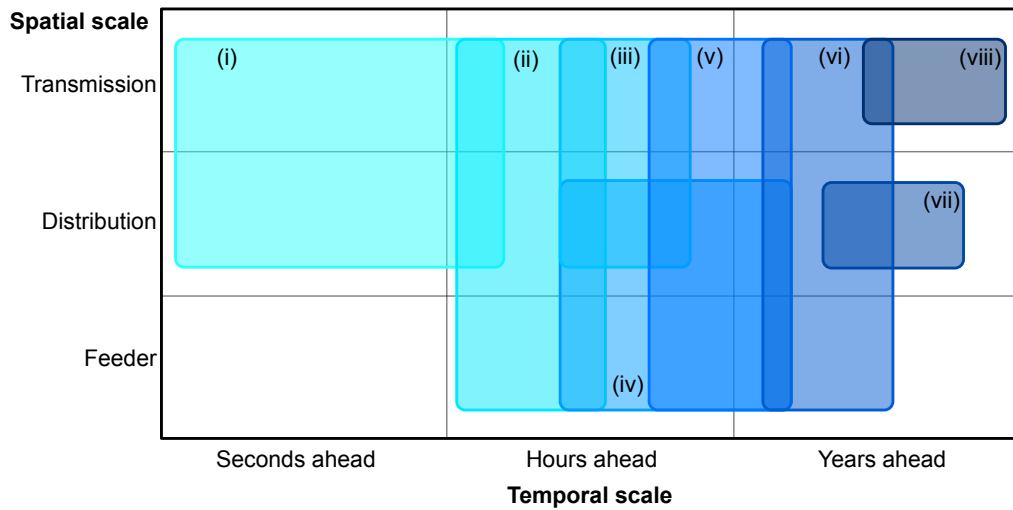


Figure 1. Overview of the potential categories of value that can be created by P2P energy trading, with an indicative mapping to the spatial and temporal scales of integration necessary for them to be realized.

(i) Increasing system reliability and preventing blackouts, (ii) reducing renewable curtailment, (iii) reducing losses, (iv) supporting local economies, (v) reducing energy poverty, (vi) incentivizing DER adoption, (vii) deferring distribution upgrades, and (viii) deferring generation and transmission upgrades.

distribution to national transmission) and temporal scales (from seconds-ahead flexibility to years-ahead network planning). The Perspective concludes with promising directions for future interdisciplinary research combining power systems engineering, economics, computer science and social science. We focus specifically on electrical power systems, but the proposed framework could also be relevant for other energy carriers and multi-carrier energy systems.

VALUE OF PEER-TO-PEER TRADING ACROSS SCALES

Many academic studies and industry demonstrations of P2P energy trading have focused on the value offered in terms of bill savings for prosumers when trading energy at retail metering timescales (e.g. half-hourly intervals) within a single low voltage distribution network³⁴. This is a reasonable first step for investigating P2P energy trading while it is restricted to small-scale trials. However, there are four main reasons why this narrow focus neglects important additional sources of potential value. Firstly, since P2P energy trading impacts how prosumers manage their flexible resources, it can create value (as well as costs) for other power system stakeholders, including system operators, generators, retail suppliers and non-participating consumers. Understanding the impact on other stakeholders is critical for business model development and regulatory reform³⁵. Secondly, depending on how P2P energy trading platforms are designed and used, they could create environmental and social value in addition to economic value²⁹. Thirdly, only considering trading within a single distribution network restricts consideration of how a large number of local P2P energy trading platforms could be coordinated to make substantial contributions to overall system operation³⁶. Finally, trading at retail metering

timescales excludes the value that P2P energy trading platforms could offer for coordinating faster timescale flexibility services, as well as the longer term value created by deferring or avoiding infrastructure upgrades³⁷.

Figure 1 presents an overview of different categories of value which could be created by P2P energy trading and an indicative mapping of these to the required scales of integration. These include:

Increasing system reliability and preventing blackouts: P2P energy trading platforms could be used to enable the bottom-up formation of federated arrangements between coalitions of prosumers to cooperatively provide local power balancing for microgrid formation, or upstream flexibility services³⁸. By enabling individual prosumer preferences and capabilities to be accounted for, this could provide a more flexible and technology neutral alternative to top-down arrangements from individual aggregators.

Reducing renewable curtailment: Matching flexible demand to local renewable generation can alleviate the need for DSO's to directly curtail renewable exports³².

Reducing losses: Matching generation and demand within local distribution networks can reduce upstream power flows and losses³⁹.

Supporting local economies: P2P energy trading can improve the business case for local clean energy projects, and thereby create jobs and lower energy costs within communities. In addition, prosumers can express personal preferences, such as prioritizing energy from local renewable sources or offering energy at reduced rates to organizations and businesses within their community⁴⁰.

Reducing energy poverty: P2P energy trading can help identify households that face energy poverty by increasing data visibility, and enable direct philanthropy by individuals, as well as assistance by government and community organizations²⁹. Longer term support arrangements may provide greater economic stability.

Incentivizing DER adoption: P2P energy trading can improve the utilization and business case for prosumer owned DERs, and satisfy individual preferences for autonomy and privacy⁴¹. In addition to power system decarbonization, DER adoption is critical for the decarbonization of transportation and heating⁴², and improving air quality in cities⁴³.

Deferring distribution upgrades: By enabling local energy matching, P2P energy trading can reduce upstream congestion, which can help defer distribution line and transformer upgrades. P2P energy trading can also enhance active measures used to manage distribution network constraints. For example, prosumers who sell flexibility services to their DSO could hedge their risk of non-delivery by buying energy flexibility contracts from peers⁴⁴. Alternatively, in networks where the DSO imposes capacity constraints on individual prosumers, they could trade unused capacity to constrained peers which would improve economic efficiency⁴⁵.

Deferring generation and transmission upgrades: Once a significant number of prosumers are operating within local P2P energy trading platforms, there is an opportunity to coordinate these platforms to defer the need for new generation plants and transmission lines⁴⁶. However, this requires mechanisms for integrating the operation of local P2P energy trading platforms into system-level markets for energy and flexibility, and requires transmission system operators (TSOs) to account for this when making long term investment decisions.

CHALLENGES FOR SCALING OUT PEER-TO-PEER TRADING

Despite significant industry interest and venture capital investment, P2P energy trading has been limited to small-scale trials, preventing much of the potential value from being realized⁴⁷. Three major unresolved challenges can be identified for integrating P2P energy trading platforms into power systems at scale.

First is the challenge of enforcing network constraints through bilateral negotiation. This is difficult without a central coordinator since power flows and voltages depend nonlinearly on the collective operation of prosumers. The large-scale adoption of DERs will make actively managing their impact on network constraints increasingly important^{48,49}. Compared with transmission networks, distribution networks are more complex, since they connect thousands of individual consumers, and have more nonlinear characteristics due to reactive power flows and unbalanced lines⁵⁰. One approach is for P2P energy trading platforms to ignore network constraints, but then for the

DSO to resolve constraint violations by actively procuring flexibility through a separate local flexibility market⁵¹. However, this is inefficient and could create opportunities for strategic gaming if prosumers can trade in both the P2P energy market and local flexibility market. Another approach is for the DSO to be introduced as a central authority to check the outcomes of P2P negotiation^{31,52}. If a constraint violation is identified, transactions leading to the violation would be blocked and the prosumers directed to renegotiate. However, this approach may require many iterations to converge, and counteracts the advantages of P2P energy trading in terms of scalability and market transparency.

The second challenge is the difficulty of managing uncertainty within P2P energy trading platforms. These can be separated into internal sources of uncertainty, which are associated with participants, and external sources, which concern the interface between the platform and the wider power system. Internal sources of uncertainty include the weather-dependence of renewable generation and the behavior-dependence of flexible loads. Since there is always a delay between the negotiation of transactions and real-time operation, the actual load and generation of prosumers will not perfectly match market outcomes. Forcing prosumers to individually hedge against uncertainty will lead to overly conservative operation, due to the limited accuracy of individual level forecasting⁵³ and the lack of aggregation with other uncorrelated sources of uncertainty⁵⁴. External sources of uncertainty include upstream energy prices and network congestion⁵⁵. These are introduced because of the decoupling between local P2P energy trading platforms and other coordination mechanisms, including system-level markets, as well as local platforms (e.g. VPP aggregation platforms, distribution flexibility markets).

Finally, the third challenge is mediating conflicts between the transmission and distribution levels of the power system. This also arises due to the decoupling between local P2P energy trading platforms and system-level markets. Directly coordinating prosumer-level transactions at the transmission scale would be computationally infeasible and would have limited value⁵⁶. However, the aggregate operation of P2P energy trading platforms needs to be integrated into system-level operation for effective coordination. Existing P2P energy trading platform designs often treat transmission-level power flows and wholesale market prices as exogenous and independent of local operation³⁴. However, this will become invalid as the number of prosumers within P2P energy trading platforms increases. At the same time, for P2P energy trading platforms to be effectively coordinated at the transmission system level, internal details, including local network constraints and prosumer autonomy, need to be accounted for. If TSOs and DSOs plan networks without accounting for

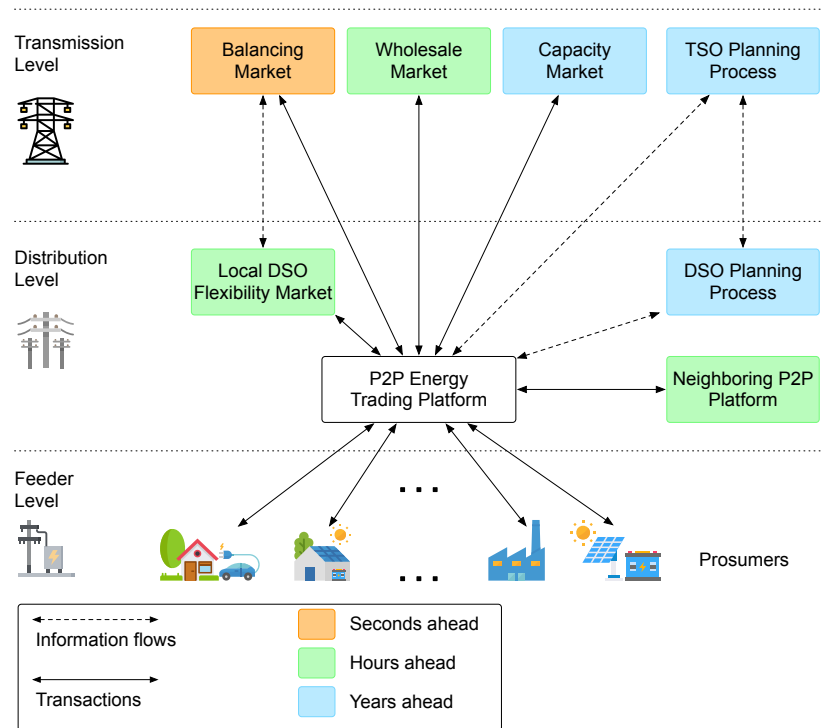


Figure 2. High-level block diagram of interactions between a P2P energy trading platform and other markets and platforms under the multiscale design framework.

Boxes identify different markets and platforms operating within the power system. Lines show the transactions (solid) and information flows (dashed) between them. Vertical position indicates the spatial scale at which the markets and platforms operate, and color indicates the main temporal scale at which they operate.

the potential for P2P energy trading platforms to unlock embedded flexibility, networks will be overbuilt⁵⁷. This will lead to higher network charges and will reduce the value of the flexibility which P2P energy trading platforms could offer, undermining otherwise valuable business models.

MULTISCALE DESIGN FOR PEER-TO-PEER TRADING

To address these challenges and successfully scale out P2P energy trading across power systems, we propose a novel framework for multiscale design. At the transmission system level, power systems are already managed using a multi-timescale approach, with separate markets for coordinating energy transactions and ancillary services at different temporal resolutions⁵⁸. In many countries with liberalized markets, regulators have also introduced new mechanisms for managing power system investment over longer timescales, including capacity markets and contracts for difference⁵⁹. The introduction of embedded DERs means that power system control now also operates over a vast range of spatial scales, from transmission level power plants to individual households within distribution feeders. Multiscale design builds upon previous work on multiscale modelling and simulation^{60,61} to consider not only how the interactions between different spatial and temporal scales can be understood, but also how new coordination mechanisms can be designed to actively manage them.

An important concept for coordinating multiscale systems is multiresolution nesting⁶². Under a multiresolution nested control architecture, computational complexity is managed by introducing a hierarchy of interconnected controllers which each have different ‘boundaries of attention’, meaning they only manage subsections of the full system, and different ‘resolutions’, meaning they understand the system at different levels of precision. Controllers at lower levels of the hierarchy operate at high resolution but with tight boundaries, whereas those at higher levels operate with broader boundaries, but lower resolution. A critical element is for the higher-level controllers to account for both the system under control, as well as the lower-level controllers which are pursuing local objectives within the system. The higher-level controllers should receive feedback from the lower-level controllers and have the ability to send back control signals to steer local control, since the higher-level controllers have greater awareness of overall system operation.

For power systems, the introduction of local P2P energy trading platforms for DER-level coordination within distribution networks can be seen as a step towards a multiresolution nested architecture. However, there is a need for new mechanisms which can integrate the operation of these local P2P energy trading platforms into the system-wide markets at the transmission level, as well

Table 1. Summary of challenges for scaling out P2P energy trading addressed by the multiscale design framework.

Challenges	How the Proposed Framework Addresses the Challenges	
	Operational Timescale	Planning Timescale
Enforcing network constraints without centralization	Scalable inter-platform negotiation mechanisms to integrate local P2P energy trading platforms with TSO and DSO flexibility markets.	Integrates operational forecasts of P2P energy trading platforms into network planning and investment decisions.
Managing uncertainty without excessive conservatism	Mechanisms allowing an agreed amount of uncertainty to propagate from lower-level platforms to higher-level ones where it can be handled by aggregation and additional sources of flexibility.	Utilization of granular data from smart meters and substation monitoring to improve forecasts for planning.
Mediating transmission and distribution conflicts	A multiresolution nested architecture for inter-platform negotiation across spatial and temporal scales, partially decoupled from intra-platform processing.	A multiresolution nested architecture for planning, accounting for interrelationships between investment and real-time operation.

as longer-term processes for network planning and investment decision making.

To address these gaps, we propose a novel multiscale design framework for P2P energy trading with two new components: (i) coordination mechanisms between markets and platforms where energy and flexibility are traded at different spatial and temporal scales; and (ii) tools for integrating the operation of P2P energy trading platforms into long-term network planning and investment decisions.

Figure 2 shows a high-level block diagram of the interactions between a P2P energy trading platform and other markets and platforms under the proposed framework, and Table 1 provides a summary of how the features of the proposed framework address the challenges for scaling out P2P energy trading. The subsequent sections discuss these new components in more detail, including trade-offs between different design options and analytic tools which could support their implementation.

Inter-Platform Coordination Mechanisms

The operation of a P2P energy trading platform will directly impact on upstream system-level markets for wholesale energy and ancillary services, as well as other local market platforms for flexibility procurement, VPP aggregation and P2P energy trading, which may operate within the same distribution network or interconnected networks. For inter-platform coordination mechanisms to be scalable, they must introduce at least some level of decoupling between the processing which occurs within separate platforms⁵⁶. We identify three broad potential architectures for new inter-platform coordination mechanisms: (A) bidirectional negotiation, (B) unidirectional pricing, and (C) communicationless predictive coordination. High-level block diagrams for these architectures are shown in Figure 3.

Bidirectional negotiation would involve introducing two-way communication and suitable protocols so that energy transactions between platforms can be agreed directly. Relevant mechanisms for bidirectional negotiation which have been proposed for use within P2P energy trading platforms include distributed optimization⁶³ and bilateral

contract networks²⁸. Under these approaches, individual market participants reach agreement on a set of mutually beneficial transactions through iterative local decision making and bidirectional communication. However, these mechanisms are not directly applicable, since in both cases negotiation is synchronous and occurs at a uniform spatial and temporal resolution. For scalability, platform-to-platform negotiation will need to operate asynchronously from intra-platform negotiation and will need to be capable of finding compatible transactions between platforms with different modelling resolutions. This will introduce additional uncertainty on the power flows between the platforms, which needs to be quantified and handled robustly. Negotiation should provide mechanisms which allow an agreed amount of uncertainty to propagate to higher level platforms with broader boundaries of attention, where it can be handled more easily due to there being a larger aggregation effect and additional sources of flexibility.

Under a unidirectional pricing approach, an upstream platform would set prices (e.g. for energy imports and exports), which would be sent to downstream platforms within its boundaries. This provides scalability, since it only requires unidirectional communication, and does not require iterative negotiation. However, the achievable economic efficiency is likely to be lower due to uncertainty associated with how downstream platforms will respond to prices. Upstream platforms which set prices need to ensure they can manage this uncertainty, so it makes sense for higher level platforms with larger boundaries to be upstream of lower-level platforms. An example of this approach is proposed in Morstyn et al.³², to manage the interactions between a DSO, which needs to set day-ahead locational import and export prices to manage network constraints, and local P2P energy trading platforms, which enable prosumers to improve the utilization of their DERs by

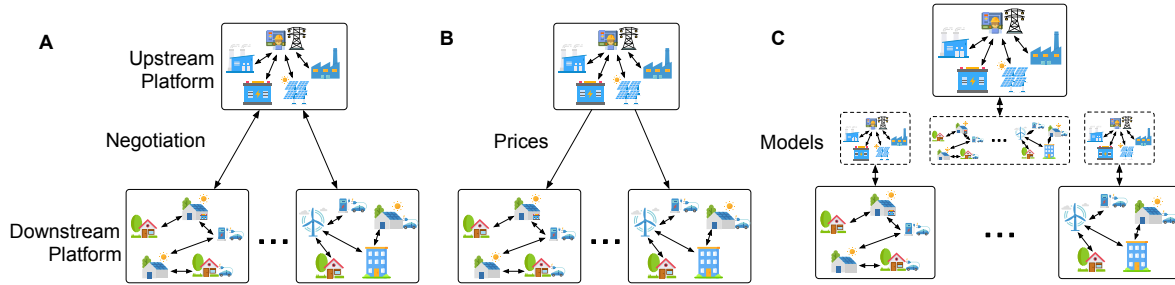


Figure 3. Architectures for negotiation mechanisms between platforms operating at different scales.

(A) Bidirectional negotiation, where there is direct negotiation of transactions between platforms operating at different scales; (B) unidirectional pricing, where upstream platforms set prices which influence the operation of downstream platforms; and (C) communicationless predictive coordination, where coordination relies on predictive modelling of neighboring/overlapping platforms.

negotiating intra-day transactions with peers. The DSO uses a day-ahead probabilistic dispatch problem to set suitable price gaps between imports and exports, as well as P2P transaction fees, to ensure that network constraints are not violated. This design provides scalability, since the DSO does not need to check and approve the transactions of local P2P energy trading platforms during operation.

The third option is coordination between platforms without communication using predictive modelling. In this case, platform operators would incorporate their predicted impact on neighboring and overlapping platforms into local market clearing. The incorporation of these impacts into clearing processes would be incentivized by a post-operation settlement process between the platforms, or if necessary, enforced by suitable regulatory rules. This approach is potentially the most scalable, since there is no real-time communication, but would require careful design due to the lack of explicit information exchange. Potential approaches for this include model predictive control (MPC)⁶⁴ and reinforcement learning⁶⁵. Under an MPC approach, the platform operator would use explicit models of the local platform's impact on neighboring/overlapping platforms for prediction and incorporate this into the market clearing process. The platform would be operated with a receding time horizon, with the predictive models updated based on local measurements. A reinforcement learning approach would operate similarly, but without explicit models of other platforms. Instead, the platform operator would rely on offline training (e.g. in a simulated environment) and learning during operation to understand how it can best manage the local platform, despite uncertainty about the wider system and operation of other platforms.

Finally, there is the potential for hybrid approaches which combine these different architectures. For example, predictive coordination could be used between asynchronous periods of bidirectional negotiation, or while waiting for unidirectional price signals to be updated.

Integration into Network Planning and Investment

The three mechanisms for inter-platform coordination presented above fit within the first component of the proposed multiscale design framework, which addresses

how P2P energy trading can be more effectively integrated into power system operation. However, the potential value of this will depend heavily on how the power system was designed. For example, in networks with excess generation and transmission capacity, there will be limited value in incentivizing the provision of generation and flexibility from embedded DERs. Conversely, a lack of distribution capacity will prevent local generation and flexibility from being exported upstream. Planning network investments to fully utilize the capabilities of local P2P energy trading platforms is challenging due to the long durations of network upgrade projects, which means that system planners and investors need to make decisions under significant uncertainty. As an example, for ISO New England it can take over five years for a 115 kV transmission line to go from planning approval to being in service⁶⁶.

This is the motivation for the second component of our proposed multiscale design framework, namely the need for new tools to integrate the operation of P2P energy trading platforms into long-term network planning and investment decisions. To address this, we propose the use of bilevel optimization, which provides a structured approach for integrating operational timescale forecasts into power network planning⁶⁷.

Figure 4 shows a high-level block diagram of a bilevel optimization model which could be applied to integrate the operation of a P2P energy trading platform into TSO or DSO decision-making. In the upper-level problem, the system operator decides on network upgrades which will maximize its return based on the regulated incentive regime it operates within. The system operator also sets network charges to recover its investment costs and can impose additional incentives or penalties on market participants to achieve policy targets. The decisions from the upper-level problem impact on the lower-level problem, which forecasts the DER adoption decisions of prosumers and the P2P transactions and power flows which would occur during operation. The interaction between the upper- and lower-level problems is two-way, and thus they need to be solved together by the system operator to properly account for P2P energy trading.

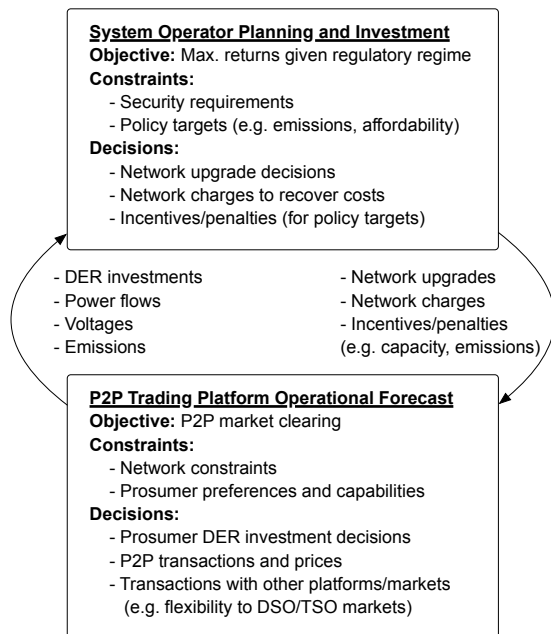


Figure 4. Bilevel optimization approach for integrating the operational forecast of a P2P energy trading platform into system operator planning and investment decisions.

The boxes show the objectives, constraints and decision variables associated with the upper-level investment problem and the resulting lower-level operational forecast of P2P trading. The information flows between the problems couple their solutions together.

Accurate forecasting is likely to be challenging given the rapid rate of change which DER technologies and P2P energy trading platforms are undergoing. However, the large number of international demonstration projects, along with the new availability of granular data from smart meters and substation monitoring, should make this increasingly feasible⁶⁸. An important challenge will be accurately modelling the flexibility which can be procured from prosumers within P2P energy trading platforms, and the uncertainty associated with its delivery, so that this can be incorporated into robust power system planning⁶⁹.

As DERs coordinated by P2P energy trading platforms provide a greater share of overall generation and flexibility, it will become increasingly important to jointly plan transmission and distribution networks⁷⁰. Although network investments are planned long ahead of operation, the combinatorial nature of the problem means that computational complexity remains an important consideration⁷¹. Introducing constraints to robustly handle uncertainty and to model the interrelationship between investment and real-time operation will exacerbate this further. Therefore, a multiresolution nested architecture, similar to the approach described for inter-platform negotiation, is also likely to be valuable for planning.

In addition to power system planning, there is also a need to incorporate P2P energy trading into the design of policy mechanisms which are used to guide power system investment⁷². Examples of these mechanisms include capacity markets, contracts for difference and renewable subsidies. These mechanisms have been introduced in different countries to help achieve specific energy policy objectives, such as decarbonization targets, security requirements and energy poverty reduction. Ideally, these mechanisms should be designed so that new technologies for DER coordination, including P2P energy trading platforms, can participate and compete with other low-carbon generation and flexibility technologies (e.g. interconnections, grid-scale storage, VPPs) on a level playing field.

CONCLUSIONS AND FUTURE RESEARCH DIRECTIONS

The proposed multiscale design framework provides a new approach by which P2P energy trading can be integrated as a core part of how power systems are designed and operated. The major opportunity is to make DERs more attractive to prosumers and more valuable for system operators, facilitating their successful system-wide scale out. By increasing the adoption rate of DERs and reducing their integration costs, the proposed framework can help accelerate the transition to a decarbonized power system that supplies increasingly electrified transportation and heating sectors. Multiscale design represents a significant shift away from traditional approaches, under which the design of different spatial levels and dynamic timescales relevant for power system coordination are no longer decoupled. Although bringing these different spatial and temporal scales together is challenging, it is also increasingly valuable due to the technological transition towards small- and medium-scale embedded DERs with infrastructure for near real-time sensing, communications and control. Implementing the proposed framework's integrative approach to network planning and DER coordination will require cooperation between energy market regulators, TSOs, DSOs and developers of P2P energy trading platforms.

Fully developing and implementing the proposed framework will also require interdisciplinary research bringing together power systems engineering with economics, computer science and social science, including *system operator incentives and regulatory change* in economics; *integrating model- and machine learning-based approaches for coordination* and *information and communications infrastructure* in computer sciences; and *prosumer modelling technology adoption and training*, and *energy justice and consumer protection* in social sciences.

System operator incentives: The proposed framework describes how system operators can integrate P2P energy trading into investment and operational decisions to create value across different policy dimensions. However, in liberalized markets where system operators are structured as regulated monopolies, the market regulator needs to

design a suitable incentive regime to ensure this is in the interest of the system operators. Overall cost savings provided by operational expenditures (e.g. DER coordination) and capital expenditures (e.g. network upgrades) should be equally rewarded and performance targets should encourage innovation⁷³. However, setting ambitious but achievable performance targets is difficult because of the rapid rate of technological development, and if set too tightly may increase the cost of financing.

Regulatory change: Multiscale design provides a new approach for regulators considering the definition of roles and responsibilities associated with P2P energy trading. The details of regulatory reforms will be country specific, but in general, clear rules which retain scope for experimentation and technological change are important enablers of innovation and investment⁷⁴. In addition to system operator incentives, updated regulations are also needed to address how balancing responsibilities are assigned and how network charges are allocated.

Integrating model- and machine learning-based approaches for coordination: There has been significant interest from the power system control community in the potential for machine learning-based approaches to offer lower computational burden and the ability to learn within complex stochastic environments⁷⁵. However, key challenges include the potential for overfitting, which can limit generalizability beyond training scenarios, and difficulty establishing guarantees on performance⁷⁶. A promising direction for developing robust and scalable inter-platform coordination mechanisms could be the combination of machine learning with more established model-based approaches to capture their respective advantages⁷⁷.

Information and communications infrastructure: The selection of sensing, communications and processing infrastructure used to implement inter-platform coordination will offer a number of important trade-offs. A top-down approach (e.g. with dedicated infrastructure managed by the TSO or strict standards imposed by the regulator) may help with verifying reliability and cybersecurity, but could impose greater costs on participants, entrench incumbents and limit innovation⁷⁸. Alternatively, coordination mechanisms could be left for platform operators to develop bilaterally, with standards developing based on experimentation. In this case, blockchain smart contracts could provide transparent and trustless transaction protocols⁷⁹. Cost is also an important consideration, with a blockchain-based architecture likely having substantially higher communications, processing and energy requirements than a cloud computing-based architecture⁸⁰.

Prosumer modelling: Accurately modelling prosumer behavior within P2P energy trading platforms is critical for successful integration into overall system operation⁸¹. Critical questions include 'How much flexibility can be reliably obtained from prosumers?'; 'What is the impact of different incentive/penalty mechanisms on the reliable delivery of flexibility'; and 'At what level of aggregation can prosumer behavior be accurately forecast?' For system planning and network investment decisions, the adoption

rate of DERs under different market conditions will also be important. Being able to more accurately model and forecast the behaviors of smaller groups of prosumers will enable P2P energy trading platforms to offer more reliable and localized coordination, opening up new value-streams.

Technology adoption and training: An important area for further research is how P2P energy trading platforms can be designed to make them broadly appealing and easy to use. Preliminary research has indicated there is substantial interest, but that it is concentrated amongst consumers who are younger, early adopters of technology and more concerned about climate change⁸². While the details of P2P energy trading platforms developed under the proposed multiscale design framework should be largely invisible to end-users, training and organizational change will be necessary for system operators and platform developers, which will each need personnel with skills spanning market design, power engineering, data science and software development.

Energy justice and consumer protection: Access to affordable and reliable energy is widely held to be a public policy priority, due to its integral role in health and wellbeing⁸³. As P2P energy trading is integrated further into power system operation, the interests of prosumers operating within these platforms, as well as consumers operating outside of them, need to be accounted for. Energy justice provides a social science research framework for investigating where injustices may occur and how these can be avoided or remedied⁸⁴. Energy justice can be divided into distributional justice, which concerns how benefits and costs are allocated throughout society; recognition justice, which addresses how different groups and perspectives are represented and considered; and procedural justice, which focuses on the access of different stakeholders to decision-making and governance processes⁸⁵. Each of these areas is relevant for how P2P energy trading platforms are designed, and where systemic injustices are identified there may be a role for consumer protection regulations.

ACKNOWLEDGMENTS

This work was supported by UK Research and Innovation and the Engineering and Physical Sciences Research Council (award references EP/S000887/1, EP/S031901/1, and EP/T028564/1). Figures 2 and 3 include icons made by Freepik, Umeicon, surang, monkik and Good Ware from flaticon⁸⁶.

AUTHOR CONTRIBUTIONS

Conceptualization, T.M.; Investigation, T.M. and I.S.; Writing – Original Draft, T.M.; Writing – Review & Editing, I.S. and C.H.; Funding Acquisition, T.M. and C.H.

DECLARATION OF INTERESTS

The authors declare no competing interests.

REFERENCES

1. Baruah, P., Eyre, N., Qadrdan, M., Chaudry, M.,

- Blainey, S., Hall, J.W., Jenkins, N., and Tran, M. (2014). Energy system impacts from heat and transport electrification. *Proc. ICE - Energy* 167, 139–151.
2. Schoolman, A., Raturi, A., Nussey, B., Shirley, R., Knuckles, J.A., de Graaf, F., Magali, P.R., Lu, Z., Breyer, C., and Markides, C.N. (2019). Decentralizing Energy for a High-Demand, Low-Carbon World. *One Earth* 1, 388–391.
3. Cozzi, L., Gould, T., Bouckart, S., Crow, D., Kim, T.-Y., McGlade, C., Olejarnik, P., Wanner, B., and Wetzel, D. (2020). *World Energy Outlook 2020* (OECD).
4. Pudjianto, D., Chin Kim Gan, Stanojevic, V., Aunedi, M., Djapic, P., and Strbac, G. (2010). Value of Integrating Distributed Energy Resources in the UK electricity system. In *IEEE PES General Meeting* (IEEE), pp. 1–6.
5. Carvallo, J.-P., Taneja, J., Callaway, D., and Kammen, D.M. (2019). Distributed Resources Shift Paradigms on Power System Design, Planning, and Operation: An Application of the GAP Model. *Proc. IEEE* 107, 1906–1922.
6. Lasseter, R.H. (2002). MicroGrids. In 2002 IEEE Power Engineering Society Winter Meeting. Conference Proceedings (Cat. No.02CH37309) (IEEE), pp. 305–308.
7. Pudjianto, D., Ramsay, C., and Strbac, G. (2007). Virtual Power Plant and System Integration of Distributed Energy Resources. *Renew. Power Gener. IET* 1, 10–16.
8. Pereira, G.I., Specht, J.M., Silva, P.P., and Madlener, R. (2018). Technology, business model, and market design adaptation toward smart electricity distribution: Insights for policy making. *Energy Policy* 121, 426–440.
9. Schleicher-Tappeser, R. (2012). How renewables will change electricity markets in the next five years. *Energy Policy* 48, 64–75.
10. Dimeas, A., Drenkard, S., Hatziaargyriou, N., Karnouskos, S., Kok, K., Ringelstein, J., and Weidlich, A. (2014). Smart Houses in the Smart Grid: Developing an interactive network. *IEEE Electr. Mag.* 2, 81–93.
11. Parag, Y., and Sovacool, B.K. (2016). Electricity market design for the prosumer era. *Nat. Energy* 1, 16032.
12. Grünwald, P., McKenna, E., and Thomson, M. (2015). Keep it simple: time-of-use tariffs in high-wind scenarios. *IET Renew. Power Gener.* 9, 176–183.
13. Bai, L., Wang, J., Wang, C., Chen, C., and Li, F. (2018). Distribution Locational Marginal Pricing (DLMP) for Congestion Management and Voltage Support. *IEEE Trans. Power Syst.* 33, 4061–4073.
14. Edmunds, C., Bukhsh, W.A., and Galloway, S. (2018). The Impact of Distribution Locational Marginal Prices on Distributed Energy Resources: An Aggregated Approach. In 2018 15th International Conference on the European Energy Market (EEM) (IEEE), pp. 1–5.
15. Toubeau, J.-F., Morstyn, T., Bottieau, J., Zheng, K., Apostolopoulou, D., De Greve, Z., Wang, Y., and Vallee, F. (2020). Capturing Spatio-Temporal Dependencies in the Probabilistic Forecasting of Distribution Locational Marginal Prices. *IEEE Trans. Smart Grid*, 1–1.
16. Li, R., Wu, Q., and Oren, S.S. (2014). Closure to Discussion on “Distribution Locational Marginal Pricing for Optimal Electric Vehicle Charging Management.” *IEEE Trans. Power Syst.* 29, 1867–1867.
17. Cornélusse, B., Savelli, I., Paoletti, S., Giannitrapani, A., and Vicino, A. (2019). A community microgrid architecture with an internal local market. *Appl. Energy*, 547–560.
18. Mathieu, J.L., Kamgarpour, M., Lygeros, J., Andersson, G., and Callaway, D.S. (2015). Arbitraging intraday wholesale energy market prices with aggregations of thermostatic loads. *IEEE Trans. Power Syst.* 30, 763–772.
19. Nguyen, D.T., Negnevitsky, M., and de Groot, M. (2011). Pool-Based Demand Response Exchange—Concept and Modeling. *IEEE Trans. Power Syst.* 26, 1677–1685.
20. Nikonowicz, Ł.B., and Milewski, J. (2012). Virtual Power Plants - general review: structure, application and optimization. *J. Power Technol.* 92, 135–149.
21. Bose, S., and Low, S.H. (2019). Some Emerging Challenges in Electricity Markets. In *Smart Grid Control: Overview and Research Opportunities*, pp. 29–45.
22. Zarabie, A.K., Das, S., and Nazif Faqiry, M. (2019). Fairness-Regularized DLMP-Based Bilevel Transactive Energy Mechanism in Distribution Systems. *IEEE Trans. Smart Grid* 10, 6029–6040.
23. Han, L., Morstyn, T., and McCulloch, M. (2019). Incentivizing Prosumer Coalitions With Energy Management Using Cooperative Game Theory. *IEEE Trans. Power Syst.* 34, 303–313.
24. Good, N., Ellis, K.A., and Mancarella, P. (2017). Review and classification of barriers and enablers of demand response in the smart grid. *Renew. Sustain. Energy Rev.* 72, 57–72.
25. Kraning, M., Chu, E., Lavaei, J., and Boyd, S. (2014). Dynamic Network Energy Management via Proximal Message Passing. *Found. Trends Optim.* 1, 70–122.
26. Boyd, S., Parikh, N., Chu, E., Peleato, B., and Eckstein, J. (2011). Distributed Optimization and Statistical Learning via the Alternating Direction Method of Multipliers. *Found. Trends Mach. Learn.* 3, 1–122.
27. Sousa, T., Soares, T., Pinson, P., Moret, F., Baroche, T., and Sorin, E. (2019). Peer-to-peer and community-based markets: A comprehensive review. *Renew. Sustain. Energy Rev.* 104, 367–378.
28. Morstyn, T., Teytelboym, A., and McCulloch, M.D. (2019). Bilateral Contract Networks for Peer-to-Peer Energy Trading. *IEEE Trans. Smart Grid* 10, 2026–2035.
29. Morstyn, T., and McCulloch, M.D. (2019). Multiclass Energy Management for Peer-to-Peer Energy Trading Driven by Prosumer Preferences. *IEEE Trans. Power Syst.* 34.
30. Morstyn, T., and McCulloch, M.D. (2020). Peer-to-Peer Energy Trading. In *Analytics for the Sharing Economy: Mathematics, Engineering and Business Perspectives* (Springer International Publishing), pp. 279–300.
31. Kim, J., and Dvorkin, Y. (2020). A P2P-Dominant Distribution System Architecture. *IEEE Trans. Power Syst.* 35, 2716–2725.
32. Morstyn, T., Teytelboym, A., Hepburn, C., and McCulloch, M.D. (2020). Integrating P2P Energy

- Trading With Probabilistic Distribution Locational Marginal Pricing. *IEEE Trans. Smart Grid* 11, 3095–3106.
33. Hadush, S.Y., and Meeus, L. (2018). DSO-TSO cooperation issues and solutions for distribution grid congestion management. *Energy Policy* 120, 610–621.
34. Tushar, W., Yuen, C., Saha, T.K., Morstyn, T., Chapman, A.C., Alam, M.J.E., Hanif, S., and Poor, H.V. (2021). Peer-to-peer energy systems for connected communities: A review of recent advances and emerging challenges. *Appl. Energy* 282, 116131.
35. Brown, D., Hall, S., and Davis, M.E. (2019). Prosumers in the post subsidy era: an exploration of new prosumer business models in the UK. *Energy Policy* 135, 110984.
36. Guerrero, J., Gebbran, D., Mhanna, S., Chapman, A.C., and Verbič, G. (2020). Towards a transactive energy system for integration of distributed energy resources: Home energy management, distributed optimal power flow, and peer-to-peer energy trading. *Renew. Sustain. Energy Rev.* 132, 110000.
37. Ochoa, L.N., Pilo, F., Keane, A., Cuffe, P., and Pisano, G. (2016). Embracing an Adaptable, Flexible Posture: Ensuring That Future European Distribution Networks Are Ready for More Active Roles. *IEEE Power Energy Mag.* 14, 16–28.
38. Morstyn, T., Farrell, N., Darby, S.J., and McCulloch, M.D. (2018). Using peer-to-peer energy-trading platforms to incentivize prosumers to form federated power plants. *Nat. Energy* 3, 94–101.
39. Baroche, T., Pinson, P., Latimier, R.L.G., and Ahmed, H. Ben (2018). Exogenous Approach to Grid Cost Allocation in Peer-to-Peer Electricity Markets. *IEEE Trans. Power Syst.* 34, 2553–2564.
40. Goett, A., Hudson, K., and Train, K. (2000). Customers' Choice Among Retail Energy Suppliers: The Willingness-to-Pay for Service Attributes. *Energy* J., 1–28.
41. Neves, D., Scott, I., and Silva, C.A. (2020). Peer-to-peer energy trading potential: An assessment for the residential sector under different technology and tariff availabilities. *Energy* 205, 118023.
42. Morvaj, B., Evins, R., and Carmeliet, J. (2017). Decarbonizing the electricity grid: The impact on urban energy systems, distribution grids and district heating potential. *Appl. Energy* 191, 125–140.
43. Tessum, C.W., Hill, J.D., and Marshall, J.D. (2014). Life cycle air quality impacts of conventional and alternative light-duty transportation in the United States. *Proc. Natl. Acad. Sci.* 111, 18490–18495.
44. Zhang, Z., Li, R., and Li, F. (2020). A Novel Peer-to-Peer Local Electricity Market for Joint Trading of Energy and Uncertainty. *IEEE Trans. Smart Grid* 11, 1205–1215.
45. Tushar, W., Saha, T.K., Yuen, C., Smith, D., Ashworth, P., Poor, H.V., and Basnet, S. (2020). Challenges and prospects for negawatt trading in light of recent technological developments. *Nat. Energy* 5, 834–841.
46. Tushar, W., Saha, T.K., Yuen, C., Morstyn, T., Nahid-Al-Masood, Poor, H.V., and Bean, R. (2019). Grid Influenced Peer-to-Peer Energy Trading. *IEEE Trans. Smart Grid*.
47. Jason Deign (2019). Peer-to-Peer Energy Trading Still Looks Like a Distant Prospect. *Greentech Media*.
48. Schermeyer, H., Vergara, C., and Fichtner, W. (2018). Renewable energy curtailment: A case study on today's and tomorrow's congestion management. *Energy Policy* 112, 427–436.
49. Crozier, C., Morstyn, T., and McCulloch, M. (2020). The opportunity for smart charging to mitigate the impact of electric vehicles on transmission and distribution systems. *Appl. Energy* 268, 114973.
50. Bazrafshan, M., and Gatsis, N. (2018). Comprehensive Modeling of Three-Phase Distribution Systems via the Bus Admittance Matrix. *IEEE Trans. Power Syst.* 33, 2015–2029.
51. Morstyn, T., Teytelboym, A., and McCulloch, M.D. (2019). Designing Decentralized Markets for Distribution System Flexibility. *IEEE Trans. Power Syst.* 34, 2128–2139.
52. Guerrero, J., Chapman, A.C., and Verbic, G. (2018). Decentralized P2P Energy Trading under Network Constraints in a Low-Voltage Network. *IEEE Trans. Smart Grid*, 1–10.
53. Sevlian, R.A., and Rajagopal, R. (2014). A model for the effect of aggregation on short term load forecasting. In 2014 IEEE PES General Meeting I Conference & Exposition (IEEE), pp. 1–5.
54. Elombo, A.I., Morstyn, T., Apostolopoulou, D., and McCulloch, M.D. (2017). Residential load variability and diversity at different sampling time and aggregation scales. 2017 IEEE AFRICON Sci. Technol. Innov. Africa, AFRICON 2017, 1331–1336.
55. Ji, Y., Thomas, R.J., and Tong, L. (2017). Probabilistic Forecasting of Real-Time LMP and Network Congestion. *IEEE Trans. Power Syst.* 32, 831–841.
56. Moret, F., Baroche, T., Sorin, E., and Pinson, P. (2018). Negotiation Algorithms for Peer-to-Peer Electricity Markets: Computational Properties. In Power Systems Computation Conference (PSCC) (IEEE), pp. 1–7.
57. Klyapovskiy, S., You, S., Michiorri, A., Kariniotakis, G., and Bindner, H.W. (2019). Incorporating flexibility options into distribution grid reinforcement planning: A techno-economic framework approach. *Appl. Energy* 254.
58. Dowling, A.W., Kumar, R., and Zavala, V.M. (2017). A multi-scale optimization framework for electricity market participation. *Appl. Energy* 190, 147–164.
59. Bielen, D., Burtraw, D., Palmer, K., and Steinberg, D. (2003). The Future of Power Markets in a Low Marginal Cost World.
60. Karabasov, S., Nerukh, D., Hoekstra, A., Chopard, B., and Coveney, P. V. (2014). Multiscale modelling: Approaches and challenges. *Philos. Trans. R. Soc. A Math. Phys. Eng. Sci.* 372, 2–4.
61. Crespo del Granado, P., van Nieuwkoop, R.H., Kardakos, E.G., and Schaffner, C. (2018). Modelling the energy transition: A nexus of energy system and economic models. *Energy Strateg. Rev.* 20, 229–235.
62. Meystel, A. (1994). Multiscale models and controllers. *Proc. IEEE/IFAC Jt. Symp. Comput.*, 13–26.
63. Sorin, E., Bobo, L., and Pinson, P. (2019). Consensus-Based Approach to Peer-to-Peer Electricity Markets With Product Differentiation. *IEEE Trans. Power Syst.* 34, 994–1004.
64. Rawlings, J.B., and Mayne, D.Q. (2009). Model Predictive Control: Theory and Design.
65. Powell, W.B. (2020). Reinforcement Learning and Stochastic Optimization: A unified framework for

- sequential decisions.
66. ISO New England (2020). Final Project List - October 2020.
67. Savelli, I., and Morstyn, T. (2021). Electricity prices and tariffs to keep everyone happy: A framework for fixed and nodal prices coexistence in distribution grids with optimal tariffs for investment cost recovery. *Omega*, 102450.
68. McKenna, E., Richardson, I., and Thomson, M. (2012). Smart meter data: Balancing consumer privacy concerns with legitimate applications. *Energy Policy* 41, 807–814.
69. Moret, S., Babonneau, F., Bierlaire, M., and Maréchal, F. (2020). Decision support for strategic energy planning: A robust optimization framework. *Eur. J. Oper. Res.* 280, 539–554.
70. Castanheira, L., Ault, G., Cardoso, M., McDonald, J., Gouveia, J.B., and Vale, Z. (2005). Coordination of transmission and distribution planning and operations to maximise efficiency in future power systems. In *International Conference on Future Power Systems (IEEE)*, pp. 1–5.
71. Oliveira, G.C., Costa, A.P.C., and Binato, S. (1995). Large scale transmission network planning using optimization and heuristic techniques. *IEEE Trans. Power Syst.* 10, 1828–1834.
72. Peñasco, C., Anadón, L.D., and Verdolini, E. (2021). Systematic review of the outcomes and trade-offs of ten types of decarbonization policy instruments. *Nat. Clim. Chang.* 11, 257–265.
73. Jenkins, J.D., and Pérez-Arriaga, I.J. (2017). Improved regulatory approaches for the remuneration of electricity distribution utilities with high penetrations of distributed energy resources. *Energy J.* 38, 63–91.
74. van Soest, H. (2019). Peer-to-peer electricity trading: A review of the legal context. *Compet. Regul. Netw. Ind.* 19, 180–199.
75. Chen, T., and Su, W. (2018). Local energy trading behavior modeling with deep reinforcement learning. *IEEE Access* 6, 62806–62814.
76. Chen, Y., Tan, Y., and Deka, D. (2018). Is Machine Learning in Power Systems Vulnerable? 2018 IEEE Int. Conf. Commun. Control. Comput. Technol. Smart Grids, SmartGridComm 2018.
77. Khargonekar, P.P., and Dahleh, M.A. (2018). Advancing systems and control research in the era of ML and AI. *Annu. Rev. Control* 45, 1–4.
78. Overman, T.M., Sackman, R.W., Davis, T.L., and Cohen, B.S. (2011). High-assurance smart grid: A three-part model for smart grid control systems. *Proc. IEEE* 99, 1046–1062.
79. De Villiers, A., and Cuffe, P. (2020). A Three-Tier Framework for Understanding Disruption Trajectories for Blockchain in the Electricity Industry. *IEEE Access* 8, 65670–65682.
80. Rimba, P., Tran, A.B., Weber, I., Staples, M., Ponomarev, A., and Xu, X. (2020). Quantifying the Cost of Distrust: Comparing Blockchain and Cloud Services for Business Process Execution. *Inf. Syst. Front.* 22, 489–507.
81. Lampropoulos, I., Vanalme, G.M.A., and Kling, W.L. (2010). A methodology for modeling the behavior of electricity prosumers within the smart grid. In *2010 IEEE PES Innovative Smart Grid Technologies Conference Europe (ISGT Europe) (IEEE)*, pp. 1–8.
82. Fell, M.J., Schneiders, A., and Shipworth, D. (2019). Consumer demand for blockchain-enabled peer-to-peer electricity trading in the United Kingdom: An online survey experiment. *Energies* 12.
83. Orton, F., Nelson, T., Pierce, M., and Chappel, T. (2017). Access Rights and Consumer Protections in a Distributed Energy System. *Innov. Disrupt. Grid's Edge How Distrib. Energy Resour. are Disrupting Util. Bus. Model*, 261–285.
84. Sovacool, B.K., and Dworkin, M.H. (2015). Energy justice: Conceptual insights and practical applications. *Appl. Energy* 142, 435–444.
85. Jenkins, K., McCauley, D., Heffron, R., Stephan, H., and Rehner, R. (2016). Energy justice: A conceptual review. *Energy Res. Soc. Sci.* 11, 174–182.
86. flaticon (2021). www.flaticon.com.