



**Transforming climate model output to forecasts of wind power production: how much resolution is enough?**

Journal:	<i>Meteorological Applications</i>
Manuscript ID	MET-16-0106.R1
Wiley - Manuscript type:	Research Article
Date Submitted by the Author:	08-Dec-2016
Complete List of Authors:	MacLeod, Dave; University of Oxford, Physics Torralba, Veronica; Barcelona Supercomputing Center-Centro Nacional de Supercomputación (BSC-CNS), Barcelona, Earth Sciences Davis, Melanie; Institut Català de Ciències del Clima, CFU Doblas-Reyes, Francisco; Barcelona Supercomputing Center-Centro Nacional de Supercomputación (BSC-CNS), Earth Sciences; ICREA, Pg. Lluís Companys 23, 08010, ICREA Research Professor
Keywords:	Forecasting, Ensemble Forecasts < Forecasting, Forecasting Systems < Forecasting, Long-range < Forecasting, Medium Range < Forecasting
Manuscript keywords:	Wind energy, Seasonal forecasting, Wind power, Load factor, Reanalysis, Downscaling

SCHOLARONE™  
Manuscripts

# Transforming climate model output to forecasts of wind power production: how much resolution is enough?

Dave MacLeod<sup>a\*</sup>, Veronica Torralba<sup>b</sup>, Melanie Davis<sup>c</sup>, Francisco Doblas-Reyes<sup>b,c,d</sup>

<sup>a</sup> Atmospheric, Oceanic and Planetary Physics, Department of Physics, University of Oxford, Oxford, UK

<sup>b</sup> Barcelona Supercomputing Center-Centro Nacional de Supercomputación (BSC-CNS), Barcelona, Spain

<sup>c</sup> Institut Català de Ciències del Clima, Barcelona, Spain

<sup>d</sup> ICREA, Pg. Lluís Companys 23, 08010 Barcelona, Spain

Correspondence: D. MacLeod, Atmospheric, Oceanic and Planetary Physics, Department of Physics, University of Oxford, Oxford, UK. E-mail: [macleod@atm.ox.ac.uk](mailto:macleod@atm.ox.ac.uk)

Key words: Wind energy, seasonal forecasting, wind power, load factor, reanalysis, downscaling

**ABSTRACT** Wind power forecasts are useful tools for power load balancing, energy trading and wind farm operations. Long-range monthly-to-seasonal forecasting allows prediction of departures from average weather conditions beyond traditional weather forecast timescales, months in advance. However it has not yet been demonstrated how these forecasts can be optimally transformed to wind power. The predictable part of a seasonal forecast is for longer monthly averages, not daily averages, but to use monthly averages misses information on variability. To investigate, here we build a model relating average weather conditions to average wind power output, based on the relationship between instantaneous wind speed and power production and incorporating fluctuations in air density due to temperature and wind speed variability. Observed monthly average power output from UK stations is used to validate the model and to investigate the optimal temporal resolution for the data used to drive the model. Multiple simulations of wind power are performed based on reanalysis data, making separate simulations based on monthly, daily and sub-daily averages, using a distribution defined by the mean across the period to incorporate information on variability. Basing the simulation on monthly averages alone is sub-optimal: using daily average winds gives the highest correlation against observations. No improvement over this is gained by using sub-daily averages or including temperature variability. This signifies that to transform seasonal forecasts to wind power a compromise must be made between using the daily averages with debatable skill and the more predictable monthly averages, losing information on day-to-day variability.

**KEY WORDS** Wind energy, seasonal forecasting, load factor, United Kingdom, reanalysis, downscaling

## 1. Introduction

Electricity generation from renewable sources is growing and the total installed capacity of renewable energy globally will reach 3,200GW in 2025 (Frost and Sullivan, 2014). In the UK wind power is the largest contributor to the renewable energy mix and this share is growing, with a total installed capacity of over 8GW onshore and 4GW offshore (RenewableUK, 2014). Records are continuously being broken: in January 2015 wind power supplied 14% of the UK's energy demand (RenewableUK, 2015). However despite increases in total stored capacity and headline-grabbing records, intermittency is a problem that will always remain (Albadi and El-Saadany, 2010). On windless days no energy is produced, regardless of total installed capacity. Conversely periods of high wind bring a glut of energy, to be balanced with other sources.

Wind power forecasts can help address this challenge and increase the efficiency of the grid

(Pinson, 2013). It is already routine practice to use short-term weather forecasts for wind power management (Barthelmie et al., 2008; Foley et al., 2012), however the development of weather and climate prediction science has enabled the production of skilful forecasts on longer monthly and seasonal timescales. Where these forecasts have skill they may prove useful in decision-making processes in the wider energy sector; this is an active area of research (e.g. De Felice et al., 2015; García-Morales and Dubus, 2007; Troccoli, 2010; Lynch et al., 2014). Though forecasts are currently under-utilised by the wind energy industry, recent advances in seasonal forecast skill for wind speed over Europe may provide an impetus for change (Scaife et al., 2014).

Transmission service operators matching supply to demand may be able to make use of wind power forecasts at longer timescales for load balancing, particularly when alternative sources (e.g. coal and nuclear power plants) power up and down on timescales longer than traditional weather forecasts. Scheduling of wind farm maintenance may also be improved by the use of monthly and seasonal forecasts, particularly in the case of offshore turbines where maintenance vessels must be scheduled in advance of work. Wind farm operators can also make use of forecast information through short term financial forecasting, whilst owners, banks and insurance companies can use predictions of generated power to manage risk, increasing the resilience of the industry to shocks.

Compared to traditional weather forecasts which focus on weather conditions for the upcoming few days, monthly and seasonal forecasts generally have the most skill for averages over periods of weeks, months and longer (Troccoli, 2010). Beyond a week, predictions for individual daily averages are perceived to be uninformative due to the fact that predictability on larger timescales arises from low-frequency oscillations in the climate system (Troccoli, 2010). Given that long-range forecasts are most informative for average periods longer than a week (e.g. monthly averages), the question arises: is it possible to forecast the average wind power across a month by using the monthly average alone? Or must one base a long-range power forecast on a higher temporal resolution base (e.g. daily or sub-daily averages) in order to make an optimal transformation, even though the predictability of daily variations in long-range forecasts is lower. Studies have suggested that assuming a linear relationship between monthly wind speed and power is reasonable (García-Bustamante, 2009); however using monthly average wind loses information about fundamental high-frequency variability in weather conditions. Hence, a methodology to transform the skilful time-averaged climate forecast data into useful long-range wind-power estimates is needed.

The typical spatial resolution of models used for monthly and seasonal weather forecasts is also coarse compared to both that used for shorter range forecasts and to the local conditions around most wind turbines. This means that the local conditions (e.g. variability in topography) are often not well represented. Does then the application of complex spatial downscaling lead to improvements in wind power simulation? This is a very relevant question because post-processing methods like downscaling often reduce the skill of forecasts (Frías et al., 2010), suggesting that their use should be kept to a minimum.

Furthermore air temperature impacts wind power generation: colder air is denser and has more kinetic energy than warmer air at the same speed. Does then the inclusion of variability in temperature improve the simulation of wind power?

A methodology is then necessary that takes all these issues into account, striking a compromise between the provision of high-frequency, local wind-power estimates with debatable skill and value, and the provision of averaged, coarse wind-power estimates with skilful information that might add value to the decision process. Here a model that transforms average 10m wind speed and air temperature to average load factor is created to explore these issues (where load factor is a measure of power independent of turbine model, defined as the power generated by a wind turbine as a percentage of its maximum power). This model is applied to reanalysis data, using monthly, daily

and sub-daily (e.g. 6-hourly) averages as a basis in separate simulations. In each case two simulations are made, with and without the inclusion of temperature variability. Two reanalysis datasets are used: ERA-Interim reanalysis (Dee, 2011) and the SeaWind II dataset (hereafter SW2), a spatially downscaled version of ERA-Interim using the WRF-ARW model (Menendez, 2014). Finally simulated load factor is compared with reported monthly load factor for sites in the UK across the period 2002-2012.

Whilst reanalysis data is not as accurate as wind speed observations from existing wind farm sites, it is used here as a proxy for long range forecast output, as it is generated from the same atmosphere-ocean models. It also has the advantage over station data of having global coverage. This allows estimation of the wind energy and power potential in regions where there are not yet wind farms or wind speed measurements.

Note that the current work does not address the question of actual skill of load factor forecasts from monthly and seasonal climate models; research considering power forecast skill on seasonal timescales is in progress. Instead we focus on the description and validation of the methodology to estimate the load factor from average meteorological data and an exploration of the compromise in both temporal and spatial resolution of the data needed for optimal use of the forecasts. It should be noted that a model such as this, essential for transforming seasonal forecasts to load factor predictions, does not currently exist.

The validation of an impact model driven by a seasonal climate forecast can be carried out on three levels (where an impact might be load factor potential, malaria incidence or something else). This follows the definition of a three-tier hierarchical validation approach of end-to-end seasonal climate forecast systems (Morse et al 2005). The first, tier-1, is the validation of the driving seasonal climate forecast against meteorological observations or reanalysis. Tier-2 evaluates the impact model as a multivariate nonlinear transfer function, by comparing the output of the model driven by meteorological observations or reanalysis to the observations of the impact. The final stage, tier-3, measures the skill of the impact model driven by seasonal climate forecasts against observations of the impact. In this case tier-1 and tier-3 validation are being considered in on-going work; in the current manuscript tier-2 validation only is the focus.

The following section describes the observations of load factor, the model relating average wind and temperature to load factor and the reanalysis data and methods. Following this, results are presented in section 3 and a discussion is contained in section 4.

## 2. Methodology

### 2.1 Load factor observations

Load factor is defined as the relationship between the actual and potential power generated by a wind turbine. For instance, a turbine with a maximum power rating of 2MW operating with an average load factor of 40% across a month will generate power at an average rate of 0.8MW. Using load factor rather than explicit power is useful as it is independent of the maximum power of a turbine; load factor arising from particular environmental conditions is easily converted to power output of a wind farm by multiplying with turbine rated power for each installed turbine.

Reported monthly load factor for the UK over 2002-2012 is used here as a reference to validate the load factor model described below. This data is reported from wind farms enrolled in the UK Government's incentive scheme and was originally published by the Renewable Energy Foundation (Renewable Energy Foundation, 2012). An updated version of this dataset is used here; the reader is referred to the appropriate references for a detailed analysis of this useful dataset (Staffell and

Green, 2014). Stations with at least three months of reporting data are shown in figure 1; each station covers a subset of the total 11-year period.

## 2.2 Modelling load factor as a function of average environmental conditions

Here the model used to transform average wind and temperature to average load factor is described. Several factors are taken into account to form the structure of the model:

- The relationship between instantaneous wind speed and power generated by a wind turbine (known as a power curve)
- Temporal variability in wind speed
- The increase of wind speed from surface to turbine height
- Power losses due to transmission and distribution of electricity

The ways in which these factors have been incorporated are described in detail in the following sections.

### 2.2.1 Defining a power curve

The relationship between instantaneous wind speed and generated power by a turbine is non-linear and described by a power curve (Lydia et al. 2014), the general shape of which is shown by the black curve in figure 2. At low and high wind speeds no power is generated: below a low wind speed threshold (known as ‘cut-in’ speed, around 4m/s) the wind is not strong enough for a turbine's blades to spin and above a high speed threshold (known as ‘cut-out’, around 25m/s) the blades are prevented from spinning for safety. Above the rated speed (generally 12.5m/s), turbine braking occurs, which caps the power generation at the rated power. The rated power is the maximum power of a wind turbine, meaning that between the rated speed and the cut out speed the turbine operates at its maximum capacity and the load factor is by definition 100%.

The majority of wind turbines have the same power curve shape, described in manufacturers’ product specification documents. Power curves are idealized: in practice the instantaneous power will not necessarily follow this relationship as the curves are averages of empirical data, and meso- and micro-scale interference can influence turbine operation (Rosen and Sheinman, 1994). The load factor model described here does not account for such departures from ideal power curve behaviour.

Between cut in and rated speed, the power generated by a turbine is a function of cubed wind speed and temperature. This arises from a consideration of the kinetic energy generated by a turbine and the mass of air passing through the swept area of the blades. The derivation can be found elsewhere (e.g. Burton et al., 2011), giving the power density  $P$  as

$$P = pAv^3 / 2RT, \quad (1)$$

where  $p$  is air pressure (assumed here to be constant at 1000mb),  $v$  is wind speed,  $A$  is the surface area of the turbine blades,  $R$  is the ideal gas constant ( $287\text{Jkg}^{-1}\text{K}^{-1}$ ) and  $T$  is the air temperature in Kelvin. This equation gives the rate of kinetic energy passing through a turbine, however this is not all extractable, due to theoretical and practical limitations. Betz law (Betz, 2013) limits the amount of extraction to around 60%, whilst design inefficiencies and practical material limitations reduce this further. The model does not explicitly represent these processes, but accounts for them with a scaling factor  $c$ ,

$$P = cpAv^3 / 2RT, \quad (2)$$

set empirically to produce a power curve matching real turbine specifications. Power generated



between cut in and the rated speed in the model is then given by equation 2. Above the rated speed, power equals the rated power (i.e. load factor is 100%). This gives the curve of figure 2 (produced with a scaling factor of  $c=0.19$ ).

The curve is tuned using the centre of the typical turbine operating temperature range of  $-20^{\circ}\text{C}$  to  $40^{\circ}\text{C}$ , i.e. the load factor equals 100% at the rated wind speed for temperatures of  $10^{\circ}\text{C}$ . Different average temperatures then give different power curves, examples of which are shown as the coloured curves in figure 2.

### 2.2.2 Incorporating a wind speed distribution into the model

Wind speed is not constant and basing a power calculation purely on the average wind speed over a period can lead to errors (Rosen and Sheinman, 1994). To incorporate this variability, the Rayleigh distribution is used (Carta et al., 2009). The Rayleigh distribution naturally arises when the overall magnitude of a vector is related to directional components. It assumes that the magnitudes of zonal and meridional wind speed are uncorrelated, normally distributed, have equal variance and zero mean. Note that this is not necessarily the case for the components of wind speed at all times, however the Rayleigh distribution has been found in general to be suitable for modelling wind speeds (Pishgar-Komleh et al., 2015). The distribution is given by:

$$F(x; \sigma) = \frac{x}{\sigma} e^{\frac{-x^2}{2\sigma^2}} \quad (3)$$

where  $\sigma$  is the scale parameter of the distribution of  $x$ , and the mean  $\mu$  of the distribution is given by

$$\mu = \sigma \sqrt{\pi / 2} \quad (4)$$

To use this distribution to map average wind speed to average power, the average wind speed is first used to calculate a value of  $\sigma$  from equation 4. This value of  $\sigma$  corresponds to a specific Rayleigh distribution, which is then multiplied with a power curve (corresponding to a specific average temperature) to produce a load factor distribution function. This function represents the distribution of load factor across a period with a specific average speed and temperature, with wind speed variability described by a Rayleigh distribution. The average of this distribution corresponds to the average load factor expected from a period with specified conditions. By repeating this process across a range of wind speeds, a distribution can be generated which relates any average wind speed to an average load factor, giving the curves described in figure 2. Note that if a constant wind speed is assumed, the load factor simply follows the general turbine power curve. Using this distribution means that although the underlying data may be averaged across a period, the model incorporates information on the underlying variability across that period.

Other distributions are available; some work has suggested that a Weibull distribution may be preferable for modelling wind speeds in certain situations (Carta et al. 2009). However the Weibull distribution cannot be applied generally as it trades accuracy for generality and depends on the estimation of an extra parameter. Further development of the model may consider alternative distributions fitted to the specific wind regime under study (e.g. lognormal, inverse Gaussian; a full catalogue is given in Carta et al. 2009). However it may prove difficult to estimate an extra parameter in a seasonal climate forecasting context due to the relatively small sample size of hindcast verification years. For a baseline validation of the model here the Rayleigh distribution is preferred.

### 2.2.3 Consideration of height and losses

Generally the wind speed from a weather or climate model is available at a constant level of 10m above the surface, or at the height corresponding to fixed pressure levels. It is difficult to interpolate pressure levels directly to hub height, as the physical height of the levels changes over time. Though others have followed more complex methods involving model output on several levels (Staffell and Green 2014), the required levels are often not available from climate forecast systems. Therefore a simpler relationship between 10m wind and wind at hub height is used here; using the wind profile power law (Burton et al. 2011) wind at 10m is transformed to 60m (the average UK hub height, Staffell and Green 2014). This is described by:

$$\frac{u}{u_r} = \left( \frac{z}{z_r} \right)^\alpha \quad (5)$$

where  $u$  and  $z$  are speed and height (the subscript  $r$  indicates values at a reference level) and  $\alpha$  is an empirically derived coefficient related to atmospheric stability, which varies depending on weather conditions. Here it is set to 0.143, corresponding to neutral stability over land (Burton et al. 2011). Previous work has shown that the choice of  $\alpha$  has an impact on hourly power simulation, though an average value of  $\alpha$  can accurately represent long term generation (Kubik et al. 2013). Using a value of  $\alpha=0.143$  and mapping between 10m and 60m gives the relationship:

$$u_{60m} = 1.29u_{10m} \quad (6)$$

This transformation of wind speed to account for height differences is made before calculating the distributions for wind speed and load factor described in section 2.2.2. The difference between curves calculated using 10m and 60m winds are shown by the coloured and grey curves in figure 2. Note that any variation of temperature with height is ignored: a dry adiabatic lapse rate of 9.8°C/km suggests a negligible temperature change of <1°C between ground and hub height, the difference in temperature with height for saturated air would be lower still.

One final factor included in the model is the power losses arising from the transmission and distribution of electricity. Following previous work (Staffell and Green, 2014), a performance ratio of 0.725 is used to scale the load factor and account for these losses.

### 2.3 Simulating monthly load factor using reanalysis

By using the model described in section 2.2, average 10m wind and air temperature can be transformed to average load factor. This is carried out for reanalysis data at different temporal and spatial scales in the simulations described in table 1. In each case data at a different temporal resolution is first transformed to load factor at that same temporal resolution and then averaged across each month for each station. This is then compared with the load factor observations described in section 2.1.

The reanalysis dataset used is ERA-Interim (Dee, 2011) a global atmospheric reanalysis produced at the European Centre for Medium-Range Weather Forecasts (ECMWF). This product uses a large and diverse set of observations combined with the ECMWF atmospheric model to produce a gridded spatially and temporally complete dataset. The load factor simulations here based on ERA-Interim use monthly, daily and 6-hourly 10m wind. In each case the load factor model is used to calculate the average load factor for each base period and from these monthly load factor is calculated. For each of the daily and 6-hourly simulations two simulations are made, one in which the corresponding variations in 2m temperature are taken into account, and one in which a constant temperature of 10°C is assumed. Creating simulations with and without the inclusion of temperature

variability enables an assessment of the added value of information on temperature variability.

The spatial resolution of ERA-Interim is roughly 80km in the horizontal (indicated in figure 1). For each station the simulated value of load factor in the nearest grid box is taken to represent the load factor for that station. More sophisticated statistical methods are possible to move from coarse model resolution to station values (e.g. weighted interpolation between grid points or methods based on neural networks informed by the underlying observed data). However these methods rely on station data records, which for many locations are not available. We then do not attempt to optimise load factor simulation using the station data available in this instance, in order to understand the optimal method of transforming grid point data to wind power forecasts in situations where station data is not available.

To investigate the impact of increased spatial resolution of underlying wind and temperature data, the SW2 dataset is used. This dataset is produced by using ERA-Interim boundary conditions to drive a high-resolution weather model (WRF-ARW, Menendez et al., 2014). The spatial resolution of SW2 is approximately 15km, and allows better representation of smaller scale topographic features and atmospheric processes, potentially giving more realistic values for the wind than the lower-resolution driving dataset at each station. However though it is an improvement over 80km, not all topographic features and processes are represented at 15km. The SW2 grid is shown in figure 1 by small crosses and as with the ERA-Interim data, load factor for each station is taken as the nearest gridpoint. SW2 is available at hourly resolution, which is used in the sub-daily simulation instead of the 6-hourly averages used for ERA-Interim; a Rayleigh distribution is assumed over each hour. Note also that whilst ERA-Interim overlaps the entire load factor observation period 2002-2012, SW2 is limited to 2002-2010.

*2.4 Comparing simulated and observed load factor*

Simulated monthly load factor is compared to observations by calculating the bias and the Pearson's correlation across all months in the time series. Bias is calculated by subtracting average load factor from simulated load factor (to avoid confusion: the units of the bias are % as it is a difference between two percentages, rather than a ratio relative to one of them). For the correlation, the 12-month seasonal cycle of both the observation and simulation data is calculated for each dataset separately and subtracted, in order to calculate the skill of predicting load factor variations around this relatively well-defined cycle. Significance values for correlations at the 95% level are based on the number of months of observations for each station and are calculated using a t-test (Wilks 2011).

A baseline simulation is used as a benchmark for assessment of the added value of the load factor model. The baseline is calculated by using untransformed monthly 10m ERA-Interim winds as a predictor of load factor, calculating the correlation of the wind directly with load factor observations. This can be interpreted as the least sophisticated method of estimating monthly load factor, using wind information only at the lowest temporal resolution and making no transformation. The significance of correlation differences against the baseline simulation is calculated by using the Fisher r-to-z transformation (Wilks 2011).

**3. Results**

Results for ERA-Interim are shown in figure 3 for simulations based on monthly mean wind and daily wind (it should be reemphasised here that though the underlying data comprises averages across the respective period, variability is included through the use of a Rayleigh distribution, described in section 2.3). Average observed and simulated load factor are shown in the first column, with biases in the second. The general spatial pattern of simulated load factor is consistent



with observations, with the largest simulated and observed values near the coast in northern Scotland, Wales and Cornwall. However overall the simulations underestimate the load factor. The highest discrepancy is for Northern Ireland and Wales, where simulated load factor is too low by 10-15%. Areas in the South East have the lowest bias, with simulations only around 5% lower than the observations.

Where monthly wind speed is transformed directly to monthly load factor a large bias is present: this method produces values of load factor lower than 10% on average. This is below the observed values of around 15% - 35%, resulting in a negative load factor bias of up 30%. By using daily and sub-daily data this bias is greatly reduced, bringing simulated load factor to around 15%-20% on average. There is no difference in the bias when 6-hourly averages are used, nor is there any improvement when temperature variations are incorporated into the calculation (not shown).

Correlations with observations (with seasonal cycle removed from simulations and observations) are shown in the third column of figure 3, along with a baseline correlation where monthly 10m ERA-Interim winds are correlated against load factor observations (without being transformed to load factor themselves). Differences from this baseline are shown in the fourth column of the figure. Baseline correlations are significant at the 95% level and range between 0.4-0.7, with the highest correlations seen inland and the lowest in coastal areas, particularly in Northern Scotland, the east coast of England and in the South West.

Using monthly mean wind transformed to load factor does not improve from the baseline, and in many cases reduces the correlation (though generally the difference is not significant at the 95% level). The simulation based on daily mean winds does however give significant improvement to the baseline correlation: most correlations are 0.1-0.2 higher than the baseline, ranging mostly between 0.6-0.9. This indicates that the cumulative power generated across a month is dependent on the day-to-day variability in wind speed and fluctuations do not average out over time due to the nonlinear power curve. For a small number of inland stations using daily data improves correlations significantly from the baseline, these stations are mostly inland where correlations are already high. The largest changes arise in coastal areas, where correlations are improved by around 0.3-0.4. The station with the largest overall improvement is in the Shetland Islands, where the correlation coefficient improves from around 0.3 using the baseline method to 0.7. Results for 6-hourly wind are no different to those for daily wind, and incorporating temperature into the calculation does not impact results (not shown).

Figure 4 shows results when the SW2 dataset is used. Broadly the same conclusions can be drawn about these simulations as those based on ERA-Interim: poor performance when load factor is based on monthly wind and an improvement in correlation from the baseline when daily mean winds are used, which is not bettered by using sub-daily (in this case, hourly) reanalysis or by incorporating temperature fluctuations. Note that in figure 4 the same baseline is used as in figure 3, i.e. the correlation between monthly ERA-Interim winds and load factor observations.

There are three main differences between the two figures. Firstly, the mean biases are very slightly reduced for SW2 and the hourly data reduces this further (though this is a small change). Secondly, simulated load factor based on SW2 monthly means reduces the correlation from the baseline by a more significant amount than load factor based on monthly ERA-Interim winds. Finally, the SW2 daily wind correlations have more spatial variability than those of ERA-Interim. In some regions there is more improvement over the baseline, which is the case near the coast, particularly in Cornwall, Wales and North Scotland. However there are also reductions from the baseline correlation; some stations show a higher correlation of observed load factor against monthly ERA-Interim wind than they do against simulated load factor transformed from downscaled daily winds (though generally these correlation differences are not significant).

Results for all experiments are summarized as a distribution across all stations in figures 5 and 6. These show that how both the bias and correlation of load factor are improved using daily wind data instead of monthly average data alone, indicating that for reasonable estimates of load factor higher temporal resolution than monthly averages wind speed is necessary. At the same time, all methods result in an average bias, indicating that some bias correction in an operational forecast setting is necessary. Although the median of the bias for the sub-daily averages is slightly higher than daily averages for ERA-Interim in general the distribution is unchanged and there is no improvement in the correlations when using sub daily data. It is also clear that the impact of incorporating temperature variations is very small. Differences between ERA-Interim and SW2 results are small in terms of bias though figure 6 reveals that the SW2-based load factor correlations are slightly shifted toward more positive values compared to ERA-Interim, for load factor simulation based on daily wind some stations show negative correlation for ERA-Interim whilst all correlations for SW2 are positive.

#### 4. Discussion and conclusions

Results show the optimal simulation of load factor is gained by using the model to transform daily wind speed to load factor. This gives a significant improvement over the baseline of using monthly wind as a proxy for load factor (the median correlation across stations is 0.77 when using daily data compared to the median of the baseline of 0.60). There is clearly significant day-to-day variability in wind speed, and this result demonstrates that these fluctuations do not average out in the long term: it is not the case that a month of low wind speed variability will output the same power than a month of high variability when it is transformed by the nonlinear power curve, even if the monthly average speed is identical.

Using the methodology described in this paper to transform mean monthly wind to load factor does not improve over simply using the mean monthly wind as a predictor of load factor. Therefore in a situation where only monthly climate model output is available (or the forecast sub-monthly variability has no skill), the optimal forecast would be a simple transformation of monthly average 10m winds into load factor.

There is no significant improvement in correlations observed by basing the simulation on sub-daily averages, nor is there any improvement by incorporating temperature-based air density variations into the simulation. The fact that sub-daily averages do not give improved predictions does not mean that using actual observed minute-to-minute variations would not lead to a better simulation of load factor. However monthly and seasonal forecasts models generally provide six-hourly values at best and it is unlikely that these would be more skilful than a monthly mean estimate.

Dynamically downscaling data to higher spatial resolution can add value to driving reanalysis data by more clearly representing complex variations in topography and processes (e.g. Gula and Peltier, 2012). Improvements are seen here for simulated load factor based on the downscaled SW2 data, particularly for stations near the coast, suggesting that the winds taken from this dataset are more accurate than from the lower-resolution ERA-Interim. However the downscaled data does not give a uniform improvement; for some stations the correlations with observations are lower for the downscaled data. There are also known biases in the driving reanalysis winds: in general these are too low, at least for the SW2 data (Menendez et al. 2014). It is likely that using too-weak winds from the reanalysis are a primary reason for the negative load factor bias. Several simple bias corrections were attempted before calculating load factor, but these did not improve results.

The method of interpolation of gridded data to individual stations used here is relatively crude: the nearest grid point to each station is taken. More sophisticated methods of interpolation are possible.

In an operational context the ideal situation would be to use observed daily wind time series from a station to statistically downscale large-scale data to individual stations. Since there is high spatial variability in wind speeds, this is likely to give optimal wind and load factor simulation. Relatively large biases in load factor are seen in the current study; inclusion of local effects and model tuning may reduce these. However results indicate that in a forecasting setting some bias correction post-processing may be necessary to calibrate forecast output. Statistical downscaling was not attempted in the current study due to the absence of individual daily station data. Besides, as mentioned in section 1, downscaling, as most post-processing methods, introduces the risk of reducing the already low skill of climate forecasts.

The model described here is a starting point, development may proceed in several directions: improving the hub height transformation with a more complex atmospheric stability-based relationship, incorporating stochastic departures from the power curve from turbulent effects, shown to be important for power production (Hedevang, 2014). Alternative distributions may be explored; the Rayleigh distribution was chosen for its suitability and the need for only one parameter. It may be found that other distributions are more suitable for specific regions and wind regimes, though this requires work to estimate the optimal parameters, which may take a different value for different locations even within the UK, let alone for other regions of the world. Tuning to perform well for the UK has not been attempted and would be desirable in an operational forecasting sense. However the model without tuning is a baseline against which improvements or alternatives might be measured.

It has been shown that daily data is as good a base for simulating monthly averages as sub-daily average data is. However the question of the lowest temporal resolution necessary to give significant improvement over a basic transform of monthly average wind speed is open. To pose the question another way: is the correlation improvement over the baseline seen here for calculations based on daily average data maintained when the calculation is based upon 2-day average winds, 5-day averages, or 10-day averages? At what temporal resolution does the correlation approach the baseline?

This is an important idea to understand if monthly-to-seasonal forecasts are to be used to make load factor predictions. Because of the nature of seasonal forecasts, with predictability coming from low-frequency variations in climatic processes, it is the case that monthly (and possibly weekly) means have more skill than daily averages. If it turns out to be the case that simulated monthly load factor is just as good when based on weekly as it is when based on daily data, it may be optimal to transform monthly-to-seasonal forecasts to a load factor forecast based on the more skilful weekly means rather than daily averages. Alternatively if no forecast skill is found for weekly or daily variability then it may be more sensible to base a forecast on monthly winds alone, despite the fact that using monthly averages loses information about daily variability: the improvement shown here from using model output of daily average data instead of monthly averages will only translate to a forecasting scenario if there is some predictable information in the daily variability. Considerations such as these may have the side effect of helping to reduce data traffic and storage, a major issue with the new high-resolution seasonal forecast systems that are being developed.

The interaction of monthly-to-seasonal forecasting research with the wind energy industry is an emerging research area. It is not clear yet to what extent these long-range forecasts will ultimately find use in this field, however they have already proved useful in other industries. A key development in the future is to use seasonal hindcast data to examine long-term forecast accuracy of seasonal wind power forecasts and work is currently underway to examine this as part of the SPECS and EUPORIAS projects. As the forecasts themselves continue to improve, this research, dialogue and collaboration will aid users hoping to exploit these products for the benefit of the industry and society.

## Acknowledgements

The authors would like to acknowledge funding from EU-FP7 projects SPECS (grant agreement 308378) and EUPORIAS (grant agreement 308291). For use of and access to the SeaWind data DM would like to thank Jose Manuel Gutiérrez and the Santander Meteorology Group at the University of Cantabria.

## References

- Albadi MH., El-Saadany EF. 2010. Overview of wind power intermittency impacts on power systems. *Electr. Power Syst. Res.* **80**:627–632.
- Audi R. (ed.) 1999. *The Cambridge Dictionary of Philosophy*. Cambridge University Press.
- Barthelmie RJ., Murray F., Pryor SC. 2008. The economic benefit of short-term forecasting for wind energy in the UK electricity market. *Energy Policy* **36**:1687–1696.
- Betz A. 2013. The Maximum of the Theoretically Possible Exploitation of Wind by Means of a Wind Motor. *Wind Eng.* **37**:441–446.
- Burton T., Jenkins N., Sharpe D., Bossanyi D. 2011. *Wind Energy Handbook*. Wiley.
- Carta JA., Ramírez P., Velázquez S. 2009. A review of wind speed probability distributions used in wind energy analysis. *Renew. Sustain. Energy Rev.* **13**:933–955.
- Counihan J. 1975. Adiabatic atmospheric boundary layers: A review and analysis of data from the period 1880–1972. *Atmos. Environ.* **9**:871–905.
- Dee DP., Uppala SM., Simmons a. J., Berrisford P., Poli P., Kobayashi S., Andrae U., Balmaseda M a., Balsamo G., Bauer P., Bechtold P., Beljaars a. CM., van de Berg L., Bidlot J., Bormann N., Delsol C., Dragani R., Fuentes M., Geer a. J., Haimberger L., Healy SB., Hersbach H., Hólm E V., Isaksen L., Kållberg P., Köhler M., Matricardi M., McNally a. P., Monge-Sanz BM., Morcrette J-J., Park B-K., Peubey C., de Rosnay P., Tavolato C., Thépaut J-N., Vitart F. 2011. The ERA-Interim reanalysis: configuration and performance of the data assimilation system. *Q. J. R. Meteorol. Soc.* **137**:553–597.
- Earl N., Dorling S., Hewston R., von Glasow R. 2013. 1980–2010 Variability in U.K. Surface Wind Climate. *J. Clim.* **26**:1172–1191.
- De Felice M., Alessandri A., Catalano F. 2015. Seasonal climate forecasts for medium-term electricity demand forecasting. *Appl. Energy* **137**:435–444.
- Foley AM., Leahy PG., Marvuglia A., McKeogh EJ. 2012. Current methods and advances in forecasting of wind power generation. *Renew. Energy* **37**:1–8.
- Frías MD., Herrera S., Cofiño AS., Gutiérrez JM. 2010. Assessing the Skill of Precipitation and Temperature Seasonal Forecasts in Spain: Windows of Opportunity Related to ENSO Events. *J. Clim.* **23**:209–220.
- Frost & Sullivan. 2014. *Annual Renewable Energy Outlook 2014*.

- 567 García-Bustamante E., González-Rouco JF., Jiménez PA., Navarro J., Montávez JP. 2009. A  
568 comparison of methodologies for monthly wind energy estimation. *Wind Energy* **12**:640–659.  
569
- 570 García-Morales MB., Dubus L. 2007. Forecasting precipitation for hydroelectric power  
571 management: How to exploit GCM's seasonal ensemble forecasts. *Int. J. Climatol.* **27**:1691–1705.  
572
- 573 Gula J., Peltier WR. 2012. Dynamical Downscaling over the Great Lakes Basin of North America  
574 Using the WRF Regional Climate Model: The Impact of the Great Lakes System on Regional  
575 Greenhouse Warming. *J. Clim.* **25**:7723–7742.  
576
- 577 Hedevar E. 2014. Wind turbine power curves incorporating turbulence intensity. *Wind Energy*  
578 **17**:173–195.  
579
- 580 Kubik ML., Coker PJ., Barlow JF., Hunt C. 2013. A study into the accuracy of using meteorological  
581 wind data to estimate turbine generation output. *Renew. Energy* **51**:153–158.  
582
- 583 Lydia M., Kumar SS., Selvakumar AI., Prem Kumar GE. 2014. A comprehensive review on wind  
584 turbine power curve modeling techniques. *Renew. Sustain. Energy Rev.* **30**:452–460.  
585
- 586 Lynch KJ., Brayshaw DJ., Charlton-Perez A. 2014. Verification of European Subseasonal Wind  
587 Speed Forecasts. *Mon. Weather Rev.*:140428135208008.  
588
- 589 Menendez M., García-Díez M., Fita L., Fernández J., Méndez FJ., Gutiérrez JM. 2014. High-  
590 resolution sea wind hindcasts over the Mediterranean area. *Clim. Dyn.* **42**:1857–1872.  
591
- 592 Pinson P. 2013. Wind Energy: Forecasting Challenges for Its Operational Management. *Stat. Sci.*  
593 **28**:564–585.  
594
- 595 Pishgar-Komleh SH., Keyhani A., Sefeedpari P. 2015. Wind speed and power density analysis based  
596 on Weibull and Rayleigh distributions (a case study: Firouzkooch county of Iran). *Renew. Sustain.*  
597 *Energy Rev.* **42**:313–322.  
598
- 599 Renewable Energy Foundation. 2012. Analysis of wind farm performance in UK and Denmark.  
600 Tech. rep., Renewable Energy Foundation. URL <http://tinyurl.com/azu3m97>.  
601
- 602 RenewableUK. 2014. UK Wind Energy Database (UKWED). Available at  
603 <http://www.renewableuk.com/en/renewable-energy/wind-energy/uk-wind-energy-database/>.  
604
- 605 RenewableUK. 2015. Record-breaking January for wind energy (press release 2/2/15). Available at  
606 <http://www.renewableuk.com/en/news/press-releases.cfm>  
607
- 608 Rosen A., Sheinman Y. 1994. The average output power of a wind turbine in a turbulent wind. *J.*  
609 *Wind Eng. Ind. Aerodyn.* **51**:287–302.  
610
- 611 Scaife AA., Arribas A., Blockley E., Brookshaw A., Clark RT., Dunstone N., Eade R., Fereday D.,  
612 Folland CK., Gordon M., Hermanson L., Knight JR., Lea DJ., MacLachlan C., Maidens A., Martin  
613 M., Peterson AK., Smith D., Vellinga M., Wallace E., Waters J., Williams A. 2014. Skillful long-  
614 range prediction of European and North American winters. *Geophys. Res. Lett.* **41**:2514–2519.  
615
- 616 Staffell I., Green R. 2014. How does wind farm performance decline with age? *Renew. Energy*  
617 **66**:775–786.  
618



Troccoli A. 2010. Seasonal climate forecasting. *Meteorol. Appl.* **17**:251-268

Wilks DS. 2011. Statistical Methods in the Atmospheric Sciences. Academic Press.

Tables & Figures

80km ERA-Interim	15km SW2
Monthly 10m wind	Monthly 10m wind
Daily 10m wind	Daily 10m wind
Daily 10m wind and 2m air temperature	Daily 10m wind and 2m temperature
6-hourly 10m wind	Hourly 10m wind
6-hourly 10m wind and 2m air temperature	Hourly 10m wind air temperature

**Table 1** List of simulations carried out. In each case, the listed variable(s) are transformed to monthly load factor for each station using figure 2 and taking the nearest reanalysis grid point to each station.

**Figure 1** Location of stations with monthly load factor observations as dots. The ERA-Interim grid is overlaid, with the downscaled SW2 grid-points indicated by small black crosses.


**Figure 2** Simulated average load factor as a function of average wind speed, shown for different average temperatures by the dashed curves. The grey curve indicates simulated load factor if no consideration of hub height is made, and the black curve indicates the load factor corresponding to zero variability in wind (i.e. identical to the theoretical power curve).

**Figure 3** Results for ERA-Interim across all months with observations in the period 2002-2012. The top row shows the mean load factor (load factor) for each station from observations and the baseline correlation (monthly 10m ERA-Interim wind vs load factor observations). The rows of four plots show the four diagnostics (mean load factor, bias in load factor, correlation, and difference of correlation from baseline) for the monthly 10m wind and daily 10m wind simulations (all other simulations show little difference from the daily wind simulations and so are omitted for clarity). The number of observations for each station is indicated by the size of the circles, and in correlation plots the points below 95% significance are shown as crosses.

**Figure 4** As figure 3, for the downscaled SW2 reanalysis.


**Figure 5** Distribution of the average bias for all stations, for each method of load factor described in table 1. Sub-daily refers to 6-hourly data for ERA-I, and hourly data from SW2. The extent of the whiskers indicates the range of the bias across all stations, whilst the box indicates the interquartile range (25th-75th percentile) and the central horizontal line indicates the median bias of all stations.

**Figure 6** As figure 5, for correlation against the observational data. Also shown is the distribution of baseline correlations for all stations, which for each station is the correlation of monthly ERA-Interim 10m wind at the nearest gridpoint against the observed load factor for that station.

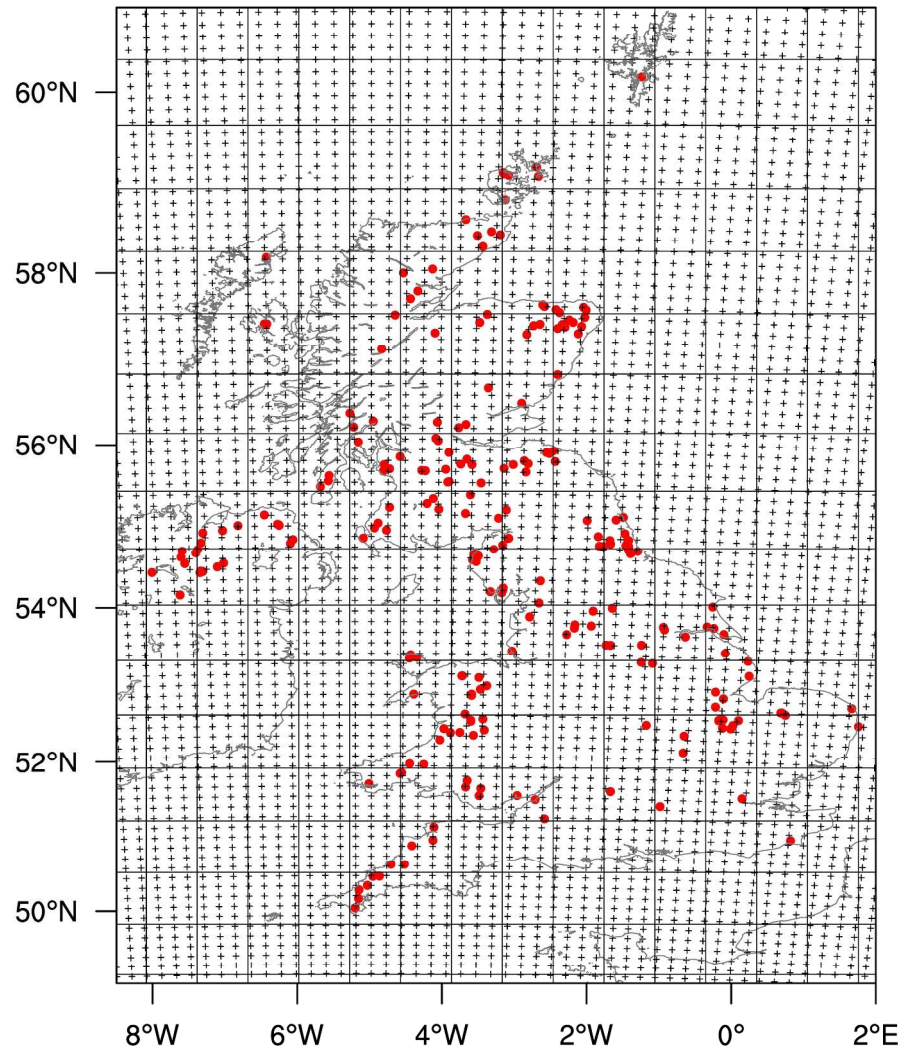


Location of stations with monthly load factor observations as dots. The ERA-Interim grid is overlaid, with the downscaled SW2 grid-points indicated by small black crosses.

245x278mm (300 x 300 DPI)

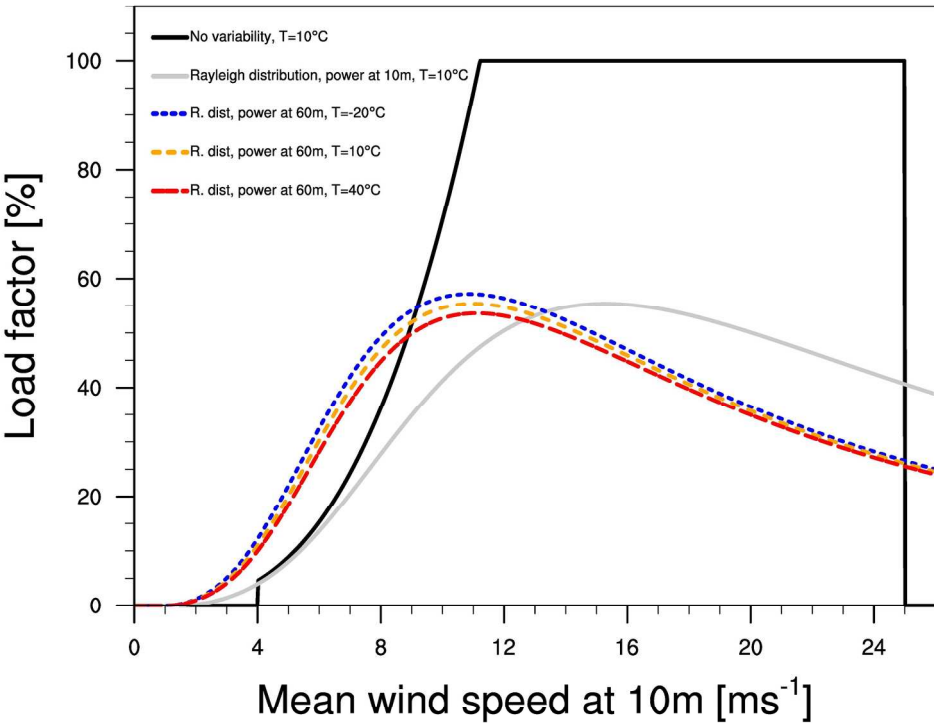


Simulated average load factor as a function of average wind speed, shown for different average temperatures by the dashed curves. The grey curve indicates simulated load factor if no consideration of hub height is made, and the black curve indicates the load factor corresponding to zero variability in wind (i.e. identical to the theoretical power curve).

190x190mm (300 x 300 DPI)

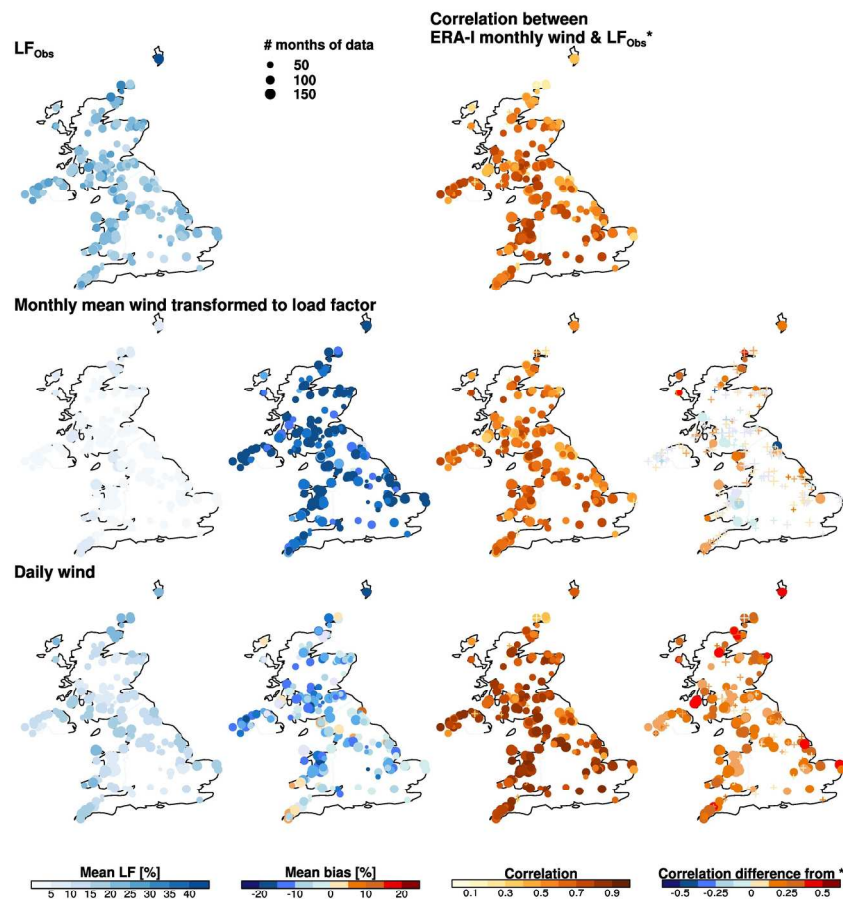


Results for ERA-Interim across all months with observations in the period 2002-2012. The top row shows the mean load factor (load factor) for each station from observations and the baseline correlation (monthly 10m ERA-Interim wind vs load factor observations). The rows of four plots show the four diagnostics (mean load factor, bias in load factor, correlation, and difference of correlation from baseline) for the monthly 10m wind and daily 10m wind simulations (all other simulations show little difference from the daily wind simulations and so are omitted for clarity). The number of observations for each station is indicated by the size of the circles, and in correlation plots the points below 95% significance are shown as crosses.

Figure 3  
190x190mm (300 x 300 DPI)

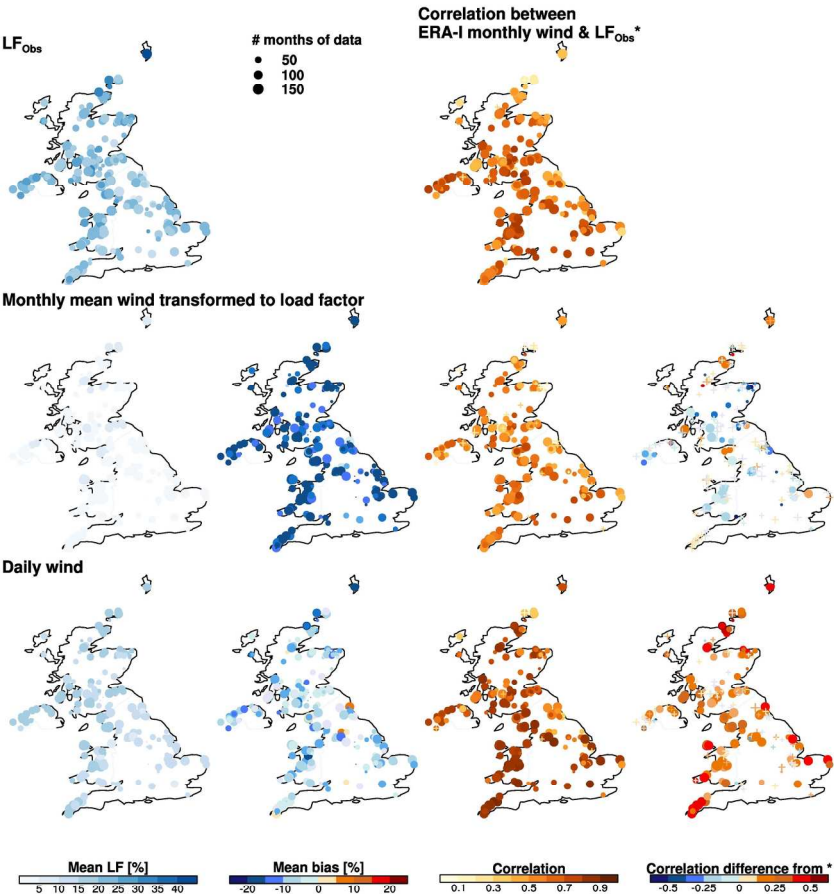


As figure 3, for the downscaled SW2 reanalysis.  
Figure 4  
190x190mm (300 x 300 DPI)



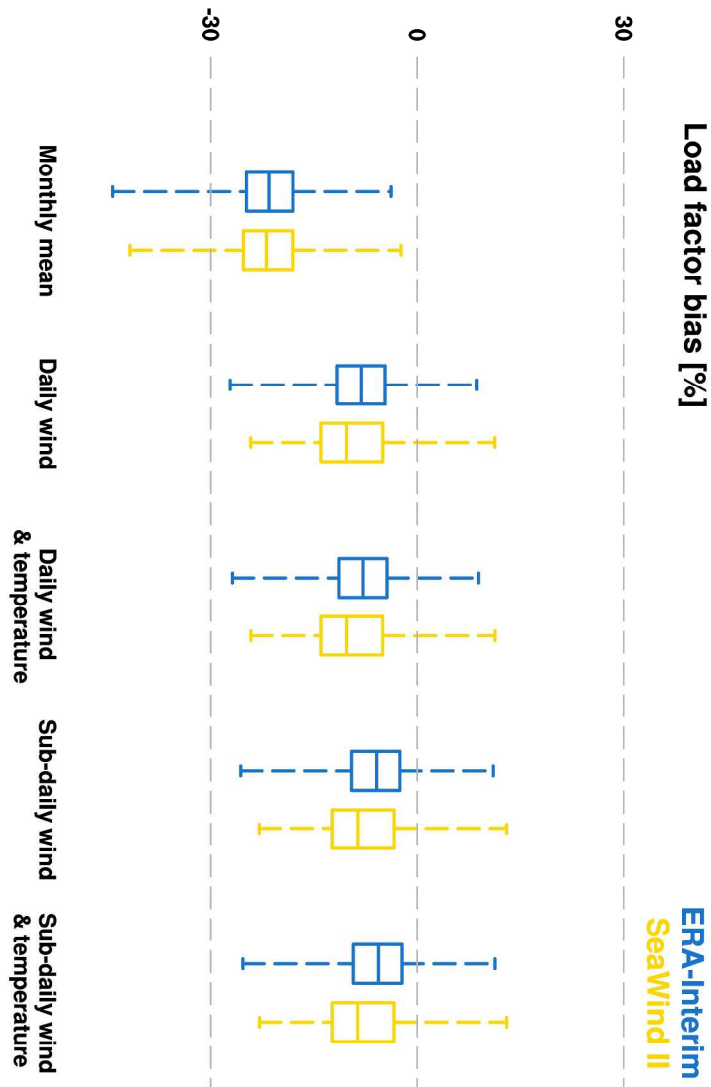

Distribution of the average bias for all stations, for each method of load factor described in table 1. Sub-daily refers to 6-hourly data for ERA-I, and hourly data from SW2. The extent of the whiskers indicates the range of the bias across all stations, whilst the box indicates the interquartile range (25th-75th percentile) and the central horizontal line indicates the median bias of all stations.

Figure 5  
279x361mm (300 x 300 DPI)

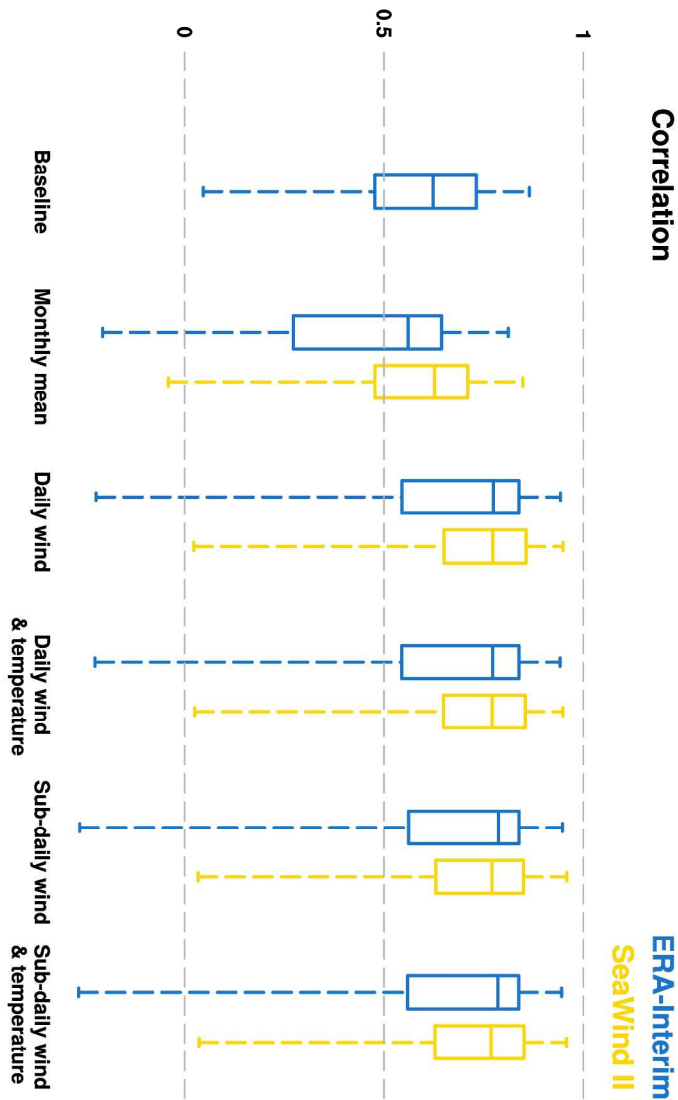

As figure 5, for correlation against the observational data. Also shown is the distribution of baseline correlations for all stations, which for each station is the correlation of monthly ERA-Interim 10m wind at the nearest gridpoint against the observed load factor for that station.

279x361mm (300 x 300 DPI)