

A Minimal Information Set to Enable Verifiable Theoretical Battery Research

Batteries are an enabling technology for addressing sustainability through the electrification of various forms of transportation¹ and grid storage.² Batteries are truly multi-scale multi-physics devices, and accordingly various theoretical descriptions exist to understand their behavior^{3–5} ranging from atomistic details to techno-economic trends. As we explore advanced battery chemistries^{6,7} or previously inaccessible aspects of existing ones,^{8–10} new theories are required to drive decisions.^{11–13} The decisions are influenced by the limitations of the underlying theory. Advanced theories used to understand battery phenomena are complicated and require substantial effort to reproduce. However, such constraints should not limit the insights from these theories. We can strive to make the theoretical research *verifiable* such that any battery stakeholder can assess the veracity of new theories, sophisticated simulations or elaborate analyses. We distinguish *verifiability*, which amounts to ‘can I trust the results, conclusions and insights and identify the context where they are relevant?’ from *reproducibility*, which ensures ‘would I get the same results if I followed the same steps?’. With this motivation, we propose a checklist to guide future reports of theoretical battery research in Table 1. We hereafter discuss our thoughts leading to this and how it helps to consistently document necessary details while allowing complete freedom for creativity of individual researchers. Given the differences between experimental and theoretical studies, the proposed checklist differs from its experimental counterparts.^{14,15} This checklist covers all flavors of theoretical battery research, ranging from atomic/molecular calculations^{16–19} to mesoscale^{20,21} and continuum-scale interactions,^{9,22} and techno-economic analysis.^{23,24} Also,

as more and more experimental studies analyze raw data,²⁵ we feel this checklist would be broadly relevant.

Table 1: A checklist to report theoretical battery studies.

Manuscript Title:

Submitting Author*:

#	Question	Y/N/NA [†]
1	Have you provided all assumptions, theory, governing equations, initial and boundary conditions, material properties, e.g., open circuit potential (with appropriate precision and literature sources), constant states, e.g., temperature, etc.?	
	Remarks:	
2	If the calculations have a probabilistic component (e.g. Monte Carlo, initial configuration in Molecular Dynamics, etc.), did you provide statistics (mean, standard deviation, confidence interval, etc.) from multiple (≥ 3) runs of a representative case?	
	Remarks:	
3	If data-driven calculations are performed (e.g. Machine Learning), did you specify dataset origin, the rationale behind choosing it, what all information does it contain and the specific portion of it being utilized? Have you described the thought process for choosing a specific modeling paradigm?	
	Remarks:	
4	Have you discussed all sources of potential uncertainty, variability, and errors in the modeling results and their impact on quantitative results and qualitative trends? Have you discussed the sensitivity of modeling (and numerical) inputs such as material properties, time step, domain size, neural network architecture, etc. where they are variable or uncertain?	
	Remarks:	
5	Have you sufficiently discussed new or not widely familiar terminology and descriptors for clarity? Did you use these terms in their appropriate context to avoid misinterpretation? Enumerate these terms in the ‘Remarks’.	
	Remarks:	

* I verify that this form is completed accurately in agreement with all co-authors, to the best of my knowledge.

[†] Y $\equiv$ the question is answered completely. Discuss any N or NA response in ‘Remarks’.

Fundamentally, any theory makes predictions based on assumptions about the system

and appropriate inputs constraining its response. *Theory* is used here as a catch-all term to include theories, analyses, models and simulations — be it physics-based or data-driven or a combination of the two. Of all possible theories, a useful theory tells us something that we do not already know from the raw data (experimental or otherwise). As shown in Figure 1, any theory can be expressed as a function with specific physicochemical context as inputs and corresponding predictions as an output. Most advanced theories do not afford analytical solutions and we invariably resort to numerical computations (which introduces additional information that has to be parsed appropriately). Every reliably computed behavior exhibits negligible dependence on numerical parameters. This is ensured via independence tests in solutions of differential equations, *e.g.*, mesh independence in finite element calculations,²⁶ or suitably correcting for numerical parameters, *e.g.*, finite domain size corrections in molecular dynamics,^{27,28} or other method-specific practices such as bias-variance trade-off in (statistical) machine learning models.^{5,29} These aspects of computer simulation are equivalent to instrument calibration in experiments. They have to be performed to trust the results but are not necessarily reported explicitly. *What are the necessary computational details to ensure verifiability* is the aspect we debated the most as we formulated this checklist. While domain-specific theoreticians are used to assessing the ‘reliability’ in terms of aforementioned independence tests and the numerical solution steps, these tests and algorithms do not succinctly convey the information to the rest of the battery stakeholders. For instance, a continuum-scale modeler solving for the porous electrode theory does not typically understand the ion diffusivity predictions using molecular dynamics but does care if those predictions provide the continuum-scale diffusivities that can be used in the porous electrode theory. Essentially, the requisite information is the error introduced in the predictions related to the numerical parameters, and is included via Q4 in Table 1. In addition to being helpful to a broader battery community, such information is also straightforward to provide irrespective of using *in-house* or *open-source* codes or software packages for computations.

Open-source codes do play an important role in accelerating progress and re-usability

of simulations.²⁰ However, we are mindful of various constraints related to funding, trade, intellectual property, logistics, *etc.*, that oftentimes require researchers to choose closed-source software. Open-source codes are, by themselves, neither necessary nor sufficient to ensure verifiable predictions. In order to accommodate a wider range of theoretical battery research, open-source codes are not required as a part of the checklist (Table 1).

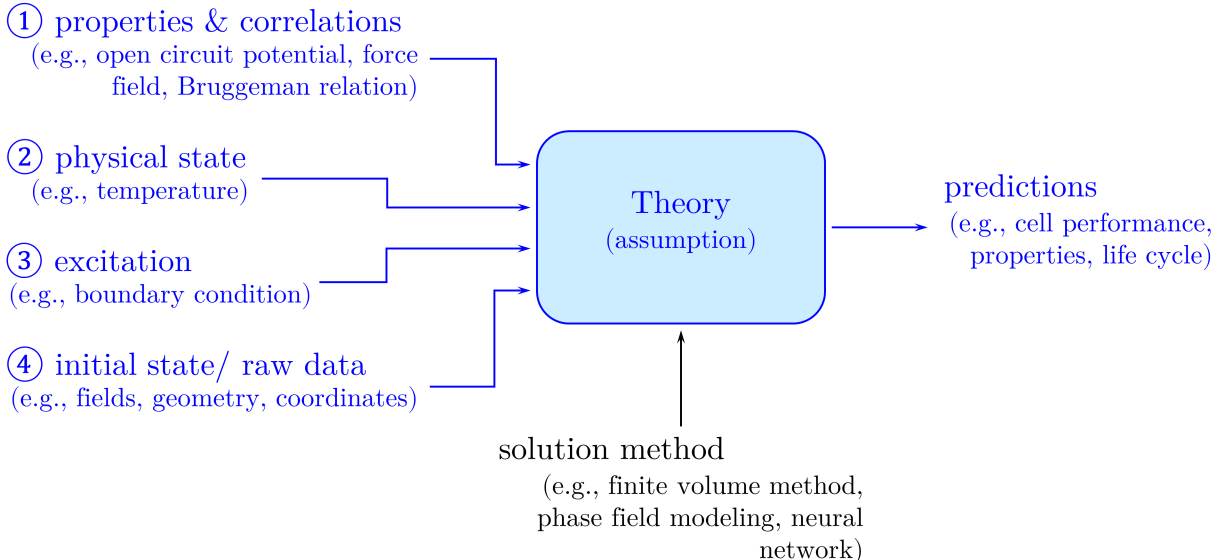


Figure 1: Any theoretical analysis can be expressed as a function that offers predictions specific to the physicochemical context, *i.e.*, ① - ④. Any reliable prediction is independent of the numerical details of the solution method.

The overarching goal of this checklist is to *maximize the utility of theoretical studies by clearly articulating the results as well as their scope of application*. A theory can be useful to:

- a stakeholder using the generated insights to make decisions, *e.g.*, an experimentalist choosing a material to synthesize, a program manager identifying a new research direction, a venture capitalist making investment decisions, *etc.*;
- a theoretician using the published theory, in part or in whole.

Except for a theoretician wholly using a published theory, its utility can be guaranteed by ensuring verifiability. As this is the most common use of any published theory, we focus

on a *minimal information set* highlighting the critical details that strongly influences the theoretical predictions. For example, in a porous intercalation electrode study, if the ion diffusivity in the electrolyte is assumed to be smaller than the ion diffusivity in the active particles, the predicted electrode behavior would be very different compared to when the ion diffusivity in the active particles were more sluggish (as is usually the case). Accordingly, all material properties that appear in the theory (① in Figure 1) should be reported. Equivalent analogies can be drawn to discuss calculations at other scales. One should particularly justify unconventional inputs and assumptions in the manuscript rather than in the supporting text. Other relevant information is about the system’s physical state ②, *e.g.*, constant pressure *versus* constant temperature ensembles in molecular dynamics. Additionally, the initial configuration ④ and the specific type of excitation ③ are equally important to interpret the results, *e.g.*, AC or DC resistance of an operating or non-operating battery examines very different aspects of the intricate battery response. These details also act to circumvent misinterpretation of the reported results. Depending on the theoretical context, not all the details on Table 1 or Figure 1 are necessarily relevant. For example, to interpret the data-driven models, it is the most important to report the details of the raw data that is used to build these models and well as model selection steps.⁵ If the raw data attributes and assumptions of the analysis are sufficiently explained, it is straightforward for others to interpret the predictions, and specifically to answer *what can this model predict?* Equivalently, if the theory contains probabilistic components, it is necessary to understand the statistical attributes of the predictions to identify pertinent insights. The checklist (Table 1) is merely a textual version of Figure 1. We acknowledge that researchers sometimes report just enough to build confidence in their results, and maintain competitive advantage in terms of proprietary models. We believe the proposed checklist accounts for this scenario and gives out enough details to be helpful without sacrificing proprietary interests.

An enticing thought is to require comparison with suitable experiments to bolster the relevance of theoretical predictions. We do agree that often the advances in modeling are mo-

tivated by a discrepancy between experimental observation and existing theory. Researchers should make efforts to compare their predictions with relevant experimental data, particularly when the two disagree. However, this is not always straightforward and often not at the same length and time-scale. Experimental measurements can vary widely even when characterizing identical materials, for example, cation transference number in PEO electrolyte.³⁰ Alternatively, for detailed models, often not all fields are accessible experimentally. For instance, a porous electrode theory predicts concentrations, potentials and current density distributions within the cells; while typically only the cell voltage is measured.⁸ We also run into the risk of overfitting models just to show good comparison with experiments. Thus, *comparison with experiments* is useful in identifying the missing understanding, but is not necessary to report *verifiable* models.

Essentially, all theoretical models have their own limitations. Every model offers prediction given the assumptions and uncertainty in inputs. Our checklist is designed to clearly articulate this context to improve transparency and discourage misinterpretation. Also, we should be mindful of model utility beyond experimental comparison. In many cases, the theories are meant to offer insights and guidelines. The desired accuracy of these guidelines also differs widely and in turn, we have multiple models, for example, reduced-order models are more relevant for battery state estimation and controls, while porous electrode theory is meant to design porous electrodes. Thus, the verifiable model reporting is concerned with contextualizing model predictions.

How to populate the checklist: We envision authors of every new manuscript with theoretical elements to fill out this checklist (Table 1). This will also help the authors to report all relevant details in the manuscript. Additionally, the editors and reviewers can assess the completeness of the work using the corresponding checklist. It is worth noting that answering ‘N’ to any of the questions can be justified through an explanation in the ‘Remarks’. Once published, we suggest that the filled-out checklist be a part of

the ‘Supporting Information’ and provide the necessary background to the readers. To give examples of filled-out checklists for different theoretical studies, each author populated checklists for at least one of their published articles.^{8,21,25,31–61} We aimed to cover many different types of battery modeling paradigms⁴ in the author-populated checklists. It also serves as a good starting reference for battery modeling best-practices and shortcomings. These are documented in the Supporting Information of this manuscript and should be helpful to future authors filling out new checklists. The readers are especially encouraged to read the *Remarks* on these examples.

Thus, instead of an exhaustive, *nice-to-have*, reporting, for our checklist we choose the most influential, *need-to-have*, information concerning theoretical predictions. We believe this *minimal information set* will enable the broader battery community to verify theoretical results and make informed decisions. As an added benefit, forgetful battery researchers (present company included) no longer have to worry if we missed conveying something important as we pursue advanced theories and build more complex models.

Aashutosh Mistry *Chemical Sciences and Engineering Division, Argonne National Laboratory, Lemont, Illinois 60439, United States*

Ankit Verma *Energy Conversion and Storage Systems Center, National Renewable Energy Laboratory, Golden, Colorado 80401, United States*

Shashank Sripad *Department of Mechanical Engineering, Carnegie Mellon University, Pittsburgh, Pennsylvania 15213, United States*

Rebecca Ciez *School of Mechanical Engineering, Division of Environmental & Ecological Engineering, Purdue University, West Lafayette, Indiana 47907, United States*

Valentin Sulzer *Department of Mechanical Engineering, Carnegie Mellon University, Pittsburgh, Pennsylvania 15213, United States*

Ferran Brosa Planella *University of Warwick, Coventry CV4 7AL, United Kingdom*

Robert Timms *Mathematical Institute, University of Oxford, Oxford OX2 6GG United Kingdom*

Yumin Zhang *Department of Materials Science and Engineering, Carnegie Mellon University, Pittsburgh, Pennsylvania 15213, United States*

Rachel Kurchin *Department of Mechanical Engineering, Carnegie Mellon University, Pittsburgh, Pennsylvania 15213, United States*

Philipp Dechent *Institute for Power Electronics and Electrical Drives (ISEA), RWTH Aachen University, Jaegerstrasse 17-19, 52066, Aachen, Germany*

Weihan Li *Institute for Power Electronics and Electrical Drives (ISEA), RWTH Aachen University, Jaegerstrasse 17-19, 52066, Aachen, Germany*

Samuel Greenbank *Battery Intelligence Lab, Department of Engineering Sciences, University of Oxford, Oxford, OX1 3PJ, United Kingdom*

Zeeshan Ahmad *Pritzker School of Molecular Engineering, University of Chicago, Chicago, Illinois 60637, United States*

Dilip Krishnamurthy *Department of Mechanical Engineering, Carnegie Mellon University, Pittsburgh, Pennsylvania 15213, United States*

Alexis M. Fenton Jr. *Department of Chemical Engineering, Massachusetts Institute of Technology, Cambridge, Massachusetts 02139, United States*

Kevin Tenny *Department of Chemical Engineering, Massachusetts Institute of Technology, Cambridge, Massachusetts 02139, United States*

Prehit Patel *University of Alabama in Huntsville, Department of Mechanical and Aerospace Engineering, Huntsville, Alabama 35899, United States*

Daniel Juarez Robles *Electrochemical Safety Research Institute, Underwriters Laboratories Inc., Northbrook, Illinois 60062, United States*

Paul Gasper *Energy Conversion and Storage Systems Center, National Renewable Energy Laboratory, Golden, Colorado 80401, United States*

Andrew Colclasure *Energy Conversion and Storage Systems Center, National Renewable Energy Laboratory, Golden, Colorado 80401, United States*

Artem Baskin *NASA Ames Research Center, Moffett Field, California 94035, United States*

Corinne D. Scown *Energy Analysis and Environmental Impacts Division, Lawrence Berkeley National Laboratory, Berkeley, California 94720, United States*

Venkat R. Subramanian *Walker Department of Mechanical Engineering & Material Science Engineering, The University of Texas at Austin, Austin, Texas 78712, United States*

Edwin Khoo *Institute for Infocomm Research, Agency for Science, Technology, and Research (A*STAR), 1 Fusionopolis Way, Connexis, Singapore 138632, Singapore*

Srikanth Allu *Computational Sciences & Engineering Division, Oak Ridge National Laboratory, Oak Ridge, Tennessee 37831, United States*

David Howey *Battery Intelligence Lab, Department of Engineering Sciences, University of Oxford, Oxford, OX1 3PJ, United Kingdom*

Steven DeCaluwe *Department of Mechanical Engineering, Colorado School of Mines, Golden, Colorado 80401, United States*

Scott A. Roberts *Engineering Sciences Center, Sandia National Laboratories, Albuquerque,*

New Mexico 87185, United States

Venkatasubramanian Viswanathan *Department of Mechanical Engineering, Carnegie Mellon University, Pittsburgh, Pennsylvania 15213, United States*

Corresponding Author

*E-mail: venkvis@cmu.edu

Supporting Information: includes filled-out example checklists covering different modeling types across scales (Fig. 1 in Howey *et al.*⁴) and a summary table.

Acknowledgement: Authors thank the Battery Modeling Webinar Series (BMWS) Slack⁶² community which provided immense feedback and a way to solicit inputs from a large and diverse portion of the modeling community. Authors acknowledge inputs from *Alexandra K. Stephan* on the checklist.

A.M. gratefully acknowledges support from Argonne National Laboratory. Argonne National Laboratory is operated for the U.S. Department of Energy Office of Science by UChicago Argonne, LLC, under contract number DE-AC02-06CH11357.

A.V., P.G. and A.C. are supported by National Renewable Energy Laboratory which is operated by Alliance for Sustainable Energy, LLC, for the U.S. Department of Energy under Contract No. DE-AC36-08GO28308

A.B. acknowledges funding from the NASA Aeronautics Mission Research Directorate's (ARMD) Transformational Tools and Technologies (TTT) Project.

C.D.S. is supported by the U.S. Department of Energy, Office of Science through contract DE-AC02-05CH11231 between Lawrence Berkeley National Laboratory and the U. S. Department of Energy.

E.K. acknowledges funding by Agency for Science, Technology and Research (A*STAR) under the Career Development Fund (C210112037).

S.A. is supported by Oak Ridge National Laboratory, managed by UT-Battelle, LLC for the U.S. Department of Energy under contract DE-AC05-00OR22725.

S.A.R. is supported by the Laboratory Directed Research and Development program at Sandia National Laboratories, a multi-mission laboratory managed and operated by National Technology and Engineering Solutions of Sandia, LLC., a wholly owned subsidiary of Honeywell International, Inc., for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-NA0003525.

This paper describes objective technical results and analysis. Any subjective views or opinions that might be expressed in the paper do not necessarily represent the views of the U.S. Department of Energy or the United States Government.

Author Contributions: A.V. initiated the idea for the checklist. V.V. provided an initial framework and issued an open solicitation for feedback.⁶³ A.M., A.V., S.S., V.V. developed the first version of the checklist. S.A.R., D.H., V.S., F.B.P., S.A., R.C., E.K., S.D., V.R.S. provided detailed critique and S.A.R. proposed a new formatting for the checklist. All of the contributors listed above collectively reached a consensus on the checklist. R.T., R.K., Y.Z., P.D., W.L., S.G., Z.A., D.K., A.M.F., K.T., P.P., D.J.R., P.G., A.C., A.B., C.D.S. filled out a checklist for their paper. All authors recognize the outsized role played by A.M. in coordinating the many challenging discussions to arrive at the final checklist.

Notes: Views expressed in this Energy Focus are those of the authors and not necessarily the views of the ACS. The authors declare no competing financial interest.

References

- (1) Bills, A.; Sripad, S.; Fredericks, W. L.; Singh, M.; Viswanathan, V. Performance Metrics Required of Next-Generation Batteries to Electrify Commercial Aircraft. *ACS Energy Lett.* **2020**, *5*, 663–668.
- (2) Albertus, P.; Manser, J. S.; Litzelman, S. Long-Duration Electricity Storage Applications, Economics, and Technologies. *Joule* **2020**, *4*, 21–32.
- (3) Newman, J.; Thomas-Alyea, K. E. *Electrochemical Systems*; John Wiley I&’ Sons, 2012.
- (4) Howey, D. A.; Roberts, S. A.; Viswanathan, V.; Mistry, A.; Beuse, M.; Khoo, E.;

- DeCaluwe, S. C. Free Radicals: Making a Case for Battery Modeling. *Electrochem. Soc. Inter.* **2020**, *29*, 30–34.
- (5) Mistry, A.; Franco, A. A.; Cooper, S. J.; Roberts, S. A.; Viswanathan, V. How Machine Learning Will Revolutionize Electrochemical Sciences. *ACS Energy Lett.* **2021**, *6*, 1422–1431.
- (6) Burke, C. M.; Pande, V.; Khetan, A.; Viswanathan, V.; McCloskey, B. D. Enhancing electrochemical intermediate solvation through electrolyte anion selection to increase nonaqueous Li–O₂ battery capacity. *Proc. Natl Acad. Sci. U. S. A.* **2015**, *112*, 9293–9298.
- (7) Barai, P.; Ngo, A. T.; Narayanan, B.; Higa, K.; Curtiss, L. A.; Srinivasan, V. The Role of Local Inhomogeneities on Dendrite Growth in LLZO-Based Solid Electrolytes. *J. Electrochem. Soc.* **2020**, *167*, 100537.
- (8) Mistry, A.; Trask, S.; Dunlop, A.; Jeka, G.; Polzin, B.; Mukherjee, P. P.; Srinivasan, V. Quantifying Negative Effects of Carbon-Binder Networks from Electrochemical Performance of Porous Li-Ion Electrodes. *J. Electrochem. Soc.* **2021**, *168*, 070536.
- (9) Mistry, A.; Usseglio-Viretta, F. L. E.; Colclasure, A.; Smith, K.; Mukherjee, P. P. Fingerprinting Redox Heterogeneity in Electrodes during Extreme Fast Charging. *J. Electrochem. Soc.* **2020**, *167*, 090542.
- (10) Fredericks, W. L.; Sripad, S.; Bower, G. C.; Viswanathan, V. Performance metrics required of next-generation batteries to electrify vertical takeoff and landing (VTOL) aircraft. *ACS Energy Lett.* **2018**, *3*, 2989–2994.
- (11) Gallagher, K. G.; Goebel, S.; Greszler, T.; Mathias, M.; Oelerich, W.; Eroglu, D.; Srinivasan, V. Quantifying the promise of lithium–air batteries for electric vehicles. *Energy Environ. Sci.* **2014**, *7*, 1555–1563.

- (12) Diederichsen, K. M.; McShane, E. J.; McCloskey, B. D. Promising Routes to a High Li+ Transference Number Electrolyte for Lithium Ion Batteries. *ACS Energy Lett.* **2017**, *2*, 2563–2575.
- (13) Ahmed, S. et al. Enabling fast charging – A battery technology gap assessment. *J. Power Sources* **2017**, *367*, 250–262.
- (14) Stephan, A. K. Standardized Battery Reporting Guidelines. *Joule* **2021**, *5*, 1–2.
- (15) Sun, Y.-K. An Experimental Checklist for Reporting Battery Performances. *ACS Energy Lett.* **2021**, *6*, 2187–2189.
- (16) Jain, A.; Shin, Y.; Persson, K. A. Computational predictions of energy materials using density functional theory. *Nat. Rev. Mater.* **2016**, *1*, 15004.
- (17) Sun, Y.; Yang, T.; Ji, H.; Zhou, J.; Wang, Z.; Qian, T.; Yan, C. Boosting the Optimization of Lithium Metal Batteries by Molecular Dynamics Simulations: A Perspective. *Adv. Ener. Mat.* **2020**, *10*, 2002373.
- (18) Deringer, V. L. Modelling and understanding battery materials with machine-learning-driven atomistic simulations. *J. Phys. Energy* **2020**, *2*, 041003.
- (19) Baskin, A.; Prendergast, D. Ion Solvation Engineering: How to Manipulate the Multiplicity of the Coordination Environment of Multivalent Ions. *J. of Phys. Chem. Lett.* **2020**, *11*, 9336–9343, PMID: 33090799.
- (20) Hong, Z.; Viswanathan, V. Open-Sourcing Phase-Field Simulations for Accelerating Energy Materials Design and Optimization. *ACS Energy Lett.* **2020**, *5*, 3254–3259.
- (21) Srivastava, I.; Bolintineanu, D. S.; Lechman, J. B.; Roberts, S. A. Controlling Binder Adhesion to Impact Electrode Mesostuctures and Transport. *ACS Appl. Mater. Inter.* **2020**, *12*, 34919–34930, PMID: 32613823.

- (22) Chen, C.-H.; Planella, F. B.; O'regan, K.; Gastol, D.; Widanage, W. D.; ; Kendrick, E. Development of Experimental Techniques for Parameterization of Multi-scale Lithium-ion Battery Models. *J. Electrochem. Soc.* **2020**, *167*, 080534.
- (23) Gallagher, K. G.; Nelson, P. A. *Lithium-Ion Batteries*; Elsevier BV, 2014; pp 97–126.
- (24) Guttenberg, M.; Sripad, S.; Bills, A.; Viswanathan, V. INCEPTS: Software for high-fidelity electric vehicle en route state of charge estimation, fleet analysis and charger deployment. *eTrans.* **2021**, *7*, 100106.
- (25) Juarez-Robles, D.; Vyas, A. A.; Fear, C.; Jeevarajan, J. A.; Mukherjee, P. P. Overcharge and Aging Analytics of Li-ion Cells. *J. Electrochem. Soc.* **2020**, *167*, 090547.
- (26) Zienkiewicz, O. C.; Taylor, R. L.; Zhu, J. Z. *The Finite Element Method: its Basis and Fundamentals*; Elsevier BV, 2005.
- (27) Maginn, E. J.; Messerly, R. A.; Carlson, D. J.; Roe, D. R.; Elliott, J. R. Best Practices for Computing Transport Properties 1. Self-Diffusivity and Viscosity from Equilibrium Molecular Dynamics [Article v1.0]. *Living Journal of Computational Molecular Science* **2018**, *1*, 6324.
- (28) Allen, M. P.; Tildesley, D. J. *Computer Simulation of Liquids*; Oxford university press, 2017.
- (29) Bishop, C. M. *Pattern Recognition and Machine Learning*; springer, 2006.
- (30) Rosenwinkel, M. P.; Schönhoff, M. Lithium Transference Numbers in PEO/LiTFSA Electrolytes Determined by Electrophoretic NMR. *Journal of The Electrochemical Society* **2019**, *166*, A1977–A1983.
- (31) Ahmad, Z.; Hong, Z.; Viswanathan, V. Design rules for liquid crystalline electrolytes for enabling dendrite-free lithium metal batteries. *Proc. Natl. Acad. Sci. U. S. A.* **2020**, *117*, 16672.

- (32) Aitio, A.; Marquis, S.; Ascencio, P.; Howey, D. Bayesian Parameter Estimation Applied to the Li-ion Battery Single Particle Model with Electrolyte Dynamics. *IFAC-PapersOnLine* **2020**, *53*, 12497–12504.
- (33) Artem Baskin, J. W. L.; Prendergast, D. Anion-Assisted Delivery of Multivalent Cations to Inert Electrodes. *The Journal of Physical Chemistry Letters* **2021**, *12*, 4347.
- (34) Planella, F. B.; Sheikh, M.; Widanage, W. D. Systematic derivation and validation of a reduced thermal-electrochemical model for lithium-ion batteries using asymptotic methods. *Electrochim. Acta* **2021**, *388*, 138524.
- (35) Chen, C.-F.; Verma, A.; Mukherjee, P. P. Probing the role of electrode microstructure in the lithium-ion battery thermal behavior. *J. Electrochem. Soc.* **2017**, *164*, E3146.
- (36) Cheng, Z.; Tenny, K. M.; Pizzolato, A.; Forner-Cuenca, A.; Verda, V.; Chiang, Y.-M.; Brushett, F. R.; Behrou, R. Data-driven electrode parameter identification for vanadium redox flow batteries through experimental and numerical methods. *Appl. Energy* **2020**, *279*, 115530.
- (37) Ciez, R.; Steingart, D. Asymptotic cost analysis of intercalation lithium-ion systems for multi-hour duration energy storage. *Joule* **2020**, *4*, 597.
- (38) Colclasure, A.; Smith, K.; Kee, R. J. Modeling detailed chemistry and transport for solid-electrolyte-interface (SEI) films in Li-ion batteries. *Electrochim. Acta* **2011**, *58*, 33.
- (39) Dechent, P.; Greenbank, S.; Hildenbrand, F.; Jbabdi, S.; Sauer, D. U.; Howey, D. A. Estimation of Li-ion degradation test sample sizes required to understand cell-to-cell variability. *arxiv* **2021**, doi: 10.1002/batt.202100148R1.
- (40) Ferraro, M. E.; Trembacki, B. L.; Brunini, V. E.; Noble, D. R.; ; Roberts, S. A. Elec-

- trode Mesoscale as a Collection of Particles: Coupled Electrochemical and Mechanical Analysis of NMC Cathodes. *J. Electrochem. Soc.* **2020**, *167*, 013543.
- (41) Gasper, P.; Gering, K.; Dufek, E.; Smith, K. Challenging Practices of Algebraic Battery Life Models through Statistical Validation and Model Identification via Machine-Learning. *J. Electrochem. Soc.* **2021**, *168*, 020502.
- (42) Greenbank, S.; Howey, D. A. Piecewise-linear modelling with feature selection for Li-ion battery end of life prognosis. *arXiv preprint arXiv:2104.07576* **2021**,
- (43) Khoo, E.; Zhao, H.; Bazant, M. Z. Linear stability analysis of transient electrodeposition in charged porous media: Suppression of dendritic growth by surface conduction. *J. Electrochem. Soc.* **2019**, *166*, A2280.
- (44) Krishnamurthy, D.; Hansen, H. A.; Viswanathan, V. Universality in nonaqueous alkali oxygen reduction on metal surfaces: implications for Li–O₂ and Na–O₂ batteries. *ACS Energy Lett.* **2016**, *1*, 162.
- (45) Kurchin, R.; Viswanathan, V. Marcus–Hush–Chidsey kinetics at electrode–electrolyte interfaces. *J. Chem. Phys.* **2020**, *153*, 134706.
- (46) Li, W.; Sengupta, N.; Dechent, P.; Howey, D.; Annaswamy, A.; Sauer, D. U. One-shot battery degradation trajectory prediction with deep learning. *Journal of Power Sources* **2021**, *506*, 230024.
- (47) Marquis, S. G.; Sulzer, V.; Timms, R.; Please, C. P.; Chapman, S. J. An asymptotic derivation of a single particle model with electrolyte. *J. Electrochem. Soc.* **2019**, *166*, A3693.
- (48) Mohan, A.; Sripad, S.; Vaishnav, P.; Viswanathan, V. Trade-offs between automation and light vehicle electrification. *Nat. Energy* **2020**, *5*, 543.

- (49) Mohtat, P.; Lee, S.; Sulzer, V.; Siegel, J. B.; Stefanopoulou, A. G. Differential expansion and voltage model for li-ion batteries at practical charging rates. *J. Electrochem. Soc.* **2020**, *167*, 110561.
- (50) Neyhouse, B. J.; Fenton, A. M.; Brushett, F. R. Too much of a good thing? Assessing performance tradeoffs of two-electron compounds for redox flow batteries. *J. Electrochem. Soc.* **2021**, *168*, 050501.
- (51) Patel, P.; Nelson, G. J. The Influence of Structure on the Electrochemical and Thermal Response of Li-Ion Battery Electrodes. *J. Energy Resour. Technol* **2020**, *142*, 050906.
- (52) Sripad, S.; Korff, D.; DeCaluwe, S. C.; Viswanathan, V. Kinetics of lithium electrodeposition and stripping. *J. Chem. Phys.* **2020**, *153*, 194701.
- (53) Subramanian, V. R.; Ploehn, H. J.; White, R. E. Shrinking Core Model for the Discharge of a Metal Hydride Electrode. *J. Electrochem. Soc.* **2000**, *147*, 2868.
- (54) Timms, R.; Marquis, S. G.; Sulzer, V.; Please, C. P.; Chapman, S. J. Asymptotic Reduction of a Lithium-Ion Pouch Cell Model. *SIAM J. Appl. Math.* **2021**, *81*, 765.
- (55) Tong, F.; Jenn, A.; Wolfson, D.; Scown, C. D.; Auffhammer, M. Health and Climate Impacts from Long-Haul Truck Electrification. *Environmental Science & Technology* **2021**, *55*, 8514–8523, PMID: 34124900.
- (56) Verma, A.; Smith, K.; Santhanagopalan, S.; Abraham, D.; Yao, K. P.; Mukherjee, P. P. Galvanostatic intermittent titration and performance based analysis of LiNi_{0.5}Co_{0.2}Mn_{0.3}O₂ cathode. *J. Electrochem. Soc.* **2017**, *164*, A3380.
- (57) Verma, A.; Kawakami, H.; Wada, H.; Hirowatari, A.; Ikeda, N.; Yoshifumi Mizuno, T. K.; Aotani, K.; Tabuchi, Y.; Mukherjee, P. P. Microstructure and Pressure-Driven Electrodeposition Stability in Solid-State Batteries. *Cell Rep. Phys. Sci.* **2021**, *2*, 100301.

- (58) Vikrant, K. S. N.; Allu, S. Modeling of Lithium Nucleation and Plating Kinetics Under Fast Charge Conditions. *J. Electrochem. Soc.* **2021**, *168*, 020536.
- (59) Viswanathan, V.; Thygesen, K. S.; Hummelshøj, J. S.; Nørskov, J. K.; Girishkumar, G.; McCloskey, B. D.; Luntz, A. C. Electrical conductivity in Li_2O_2 and its role in determining capacity limitations in non-aqueous Li- O_2 batteries. *J. Chem. Phys* **2011**, *135*, 33.
- (60) Voskuilen, T. G.; Moffat, H. K.; Schroeder, B. B.; Roberts, S. A. Multi-fidelity electrochemical modeling of thermally activated battery cells. *J. Power Sources* **2021**, *488*, 229469.
- (61) Zhang, Y.; Viswanathan, V. Design Rules for Selecting Fluorinated Linear Organic Solvents for Li Metal Batteries. *J. Phys. Chem. Lett.* **2021**, *12*, 5821.
- (62) Baker, J. A.; Beuse, M.; DeCaluwe, S. C.; Jing, L. W.; Khoo, E.; Sripad, S.; Ulissi, U.; Verma, A.; Wang, A. A.; Yeh, Y. T.; Yiu, N.; Howey, D. A.; Viswanathan, V. Fostering a Sustainable Community in Batteries. *ACS Energy Lett.* **2020**, *5*, 2361–2366.
- (63) Viswanathan, V. 2021; <https://twitter.com/venkvis/status/1404606252592680964>.